

Bock HAX5/830-4 (x1)(x2) complete fridge / freezer skid

Specifications

Marque	Bock
Le type	HAX5/830-4 (x1)(x2) complete fridge / freezer skid
Réfrigérant	Freon
kW at -20°C/+40°C	77.1
kW at -30°C/+40°C	47.458
kW at -40°C/+40°C	25.85
Sur le châssis en acier	✓
Manomètres	✓
Réservoir de liquide	✓
Réservoir de liquide ltr.	160 L
Séparateur d'huile	✓
Liquid déshydrateur	✓
ligne	
Voyant	✓
Package / Rack	✓
Stock	1






Description


Used Bock HAX5/830-4 (x1)(x2) complete fridge / freezer skid

Used Bock HAX5/830-4 (x3) complete fridge / freezer skid (3x) piston compressors Freon refrigeration. Our capacity table is based on the used type of Freon. with oil separator liquid tank and oil filter. You can also use these compressors on alternative types of Freon. For all the other specs (if

available), see the picture of the manufacturer model plate or the attached pdf file. *Why choose for HOSBV? We're not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. *Optional we can arrange the logistics.

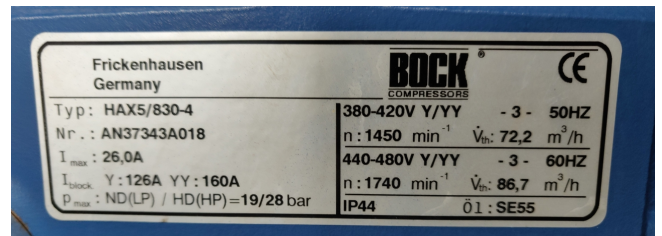

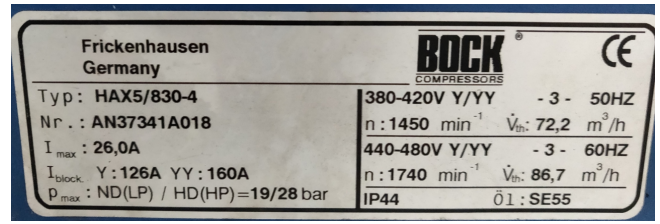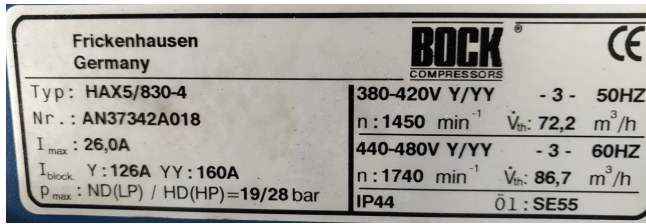

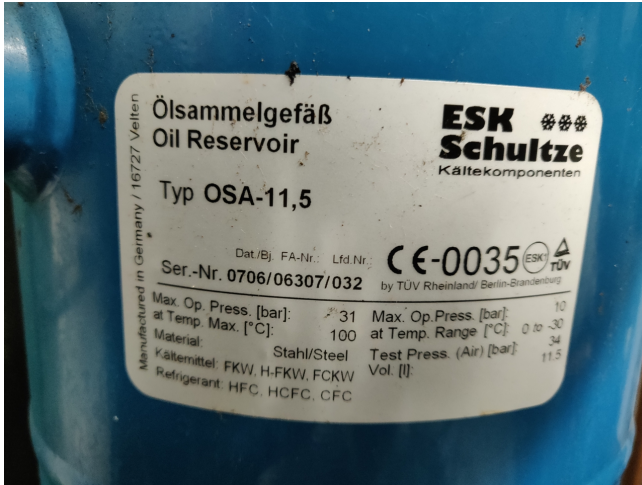

64 - HA SEMI-HERMETIC GEA COMPRESSORS

PERFORMANCE DATA

R404A/R507		50 Hz					
Type	Cond. temp. °C	Cooling capacity Q _c [kW]				Power consumption P _c [kW]	
		-20	-25	Evaporating temperature °C		-40	-45
HAX4/655-4	30 Q	18700	15100	11900	9100	6800	4800
	40 F	775	636	600	516	435	356
	40 Q	15700	12600	9760	7430	5450	3910
	50 F	831	726	625	529	436	346
HAX4/555-4	30 Q	12900	10200	7830	5880	4230	2850
	40 F	836	726	641	532	429	329
	40 Q	21900	17600	13900	10800	8540	5850
	50 F	846	726	696	552	450	350
HAX4/650-4	30 Q	18400	14700	11500	8770	6470	4530
	40 F	945	827	773	657	490	378
	40 Q	25000	20200	16000	12400	9310	6750
	50 F	15100	11900	9230	6950	5020	3420
HAX5/725-4	30 Q	25000	20200	16000	12400	9310	6750
	40 F	971	852	776	654	554	457
	40 Q	21100	16900	13300	10200	7480	5270
	50 F	15300	12000	9230	6950	5020	3420
HAX5/945-4	30 Q	33600	26400	20300	15100	10800	7580
	40 F	1479	1280	1100	928	758	600
	40 Q	21900	17600	13900	10800	8540	5850
	50 F	15600	12300	9500	7200	5200	3700
HAX6/1240-4	30 Q	30500	23400	17400	13200	9700	6700
	40 F	1480	1270	1070	900	730	580
	40 Q	26000	20800	16000	12400	9310	6750
	50 F	16100	12800	9700	7400	5400	3900
HAX6/1410-4	30 Q	33600	26400	20300	15100	10800	7580
	40 F	1479	1280	1100	928	758	600
	40 Q	21900	17600	13900	10800	8540	5850
	50 F	15600	12300	9500	7200	5200	3700

Relating to 20°C suction gas temperature without liquid subcooling
 Supplementary cooling or reduced suction gas temperature