

Bitzer 2FSL-4K-40S (x2) freeze unit

Specifications


Marque	Bitzer
Le type	2FSL-4K-40S (x2) freeze unit
Réfrigérant	CO2
kW at -30°C/+40°C	29.2 based on -10°C/-30°C
kW at -40°C/+40°C	22 based on -20°C/-40°C
Sur le châssis en acier	✓
Manomètres	✓
Séparateur d'huile	✓
Système de niveau d'huile	✓
Liquid déshydrateur	✓
ligne	
Package / Rack	✓
Stock	1




Description

Used Bitzer 2FSL-4K-40S (x2) freeze unit

Used but in very good condition Bitzer 2FSL-4K-40S (x2) freeze unit with pressure gauges, oil separator and oil reservoir. For all the other specs, see the picture of the manufacturer model plate or the attached pdf file (if available). *Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. *Optional we can also perform a new paint job and arrange the logistics.

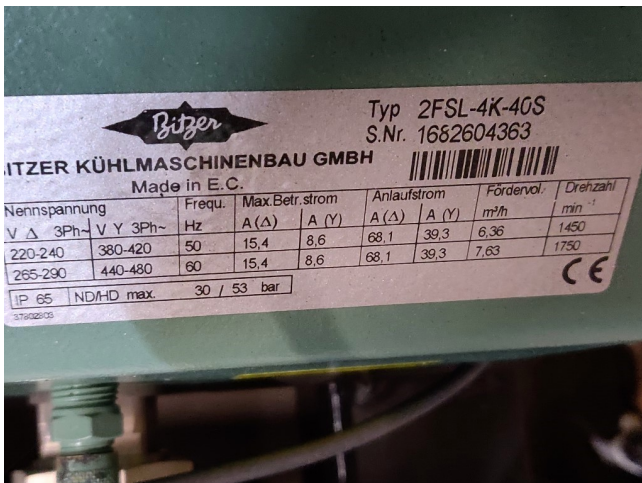

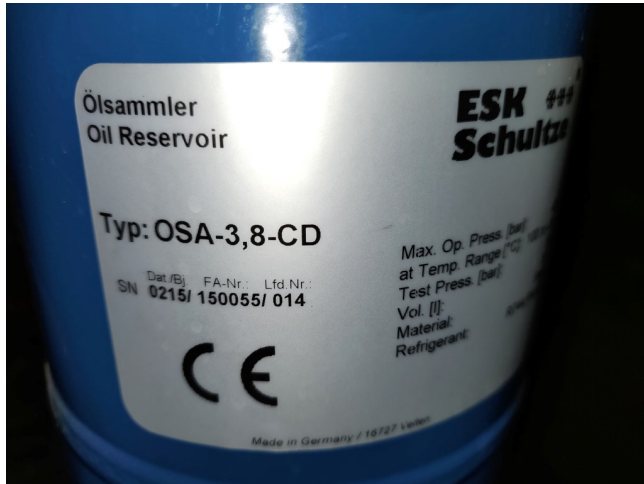

Compressor type Type de compresseur	Condensation temperature Température de condensation [°C]	Kälteleistung Cooling capacity Puissance frigorifique				Leistungsaufnahme Power consumption Puissance absorbée							
		Q ₀ [Watt]		P _e [kW]		Q ₀ [Watt]		P _e [kW]					
		Verdampfungstemperatur °C				Evaporation temperature °C				Température d'évaporation °C			
		-25	-30	-35	-40	-25	-30	-35	-40	-25	-30	-35	-40
2MSL-05K	-20	2480	1930	1480	1130	0,53	0,58	0,60	0,57	0,46	0,49	0,49	0,47
	-10	3380	2700	2110	1620	0,63	0,68	0,68	0,64	0,60	0,59	0,57	0,57
	-5	3120	2470	1920	1470	0,63	0,68	0,68	0,64	0,60	0,59	0,57	0,57
	5	2590	2030	1560	1200	0,81	0,81	0,81	0,78	0,74	0,74	0,71	0,71
2MSL-07K	-20	3440	2650	1990	1480	0,55	0,62	0,64	0,61	0,47	0,51	0,52	0,51
	-10	4520	3600	2810	2140	0,68	0,71	0,71	0,67	0,64	0,63	0,59	0,55
	-5	4110	3270	2540	1920	0,68	0,71	0,71	0,67	0,64	0,63	0,59	0,55
	5	3380	2650	2020	1490	0,89	0,87	0,87	0,82	0,76	0,76	0,72	0,67
2KSL-1K	-20	3040	2370	1780	1390	0,99	0,95	0,88	0,81	0,83	0,83	0,83	0,83
	-10	6880	4420	3350	2480	1,11	1,17	1,17	1,13	1,03	1,04	1,04	1,03
	-5	7430	5060	4090	3010	1,11	1,17	1,17	1,13	1,04	1,04	1,03	1,02
	5	6790	4420	3240	2400	1,20	1,17	1,17	1,13	1,03	1,03	1,02	1,01
2MSL-2K	-20	5040	3950	3010	2300	1,66	1,60	1,60	1,53	1,49	1,49	1,49	1,49
	-10	7200	5750	4410	3300	1,98	2,09	2,09	1,97	1,86	1,86	1,86	1,86
	-5	6620	5190	3970	3000	2,13	2,11	2,11	1,96	1,86	1,86	1,86	1,86
	5	5000	3950	3010	2300	2,16	2,09	2,09	1,96	1,86	1,86	1,86	1,86
2MSL-3K	-20	6960	5190	3970	3000	2,16	2,09	2,09	1,96	1,86	1,86	1,86	1,86
	-10	12050	9780	7780	6070	2,43	2,41	2,41	2,32	2,19	2,19	2,19	2,19
	-5	11090	8950	7090	5490	2,72	2,66	2,66	2,52	2,39	2,39	2,39	2,39
	5	9000	7350	5730	4330	3,21	3,14	3,14	2,99	2,79	2,79	2,79	2,79
2MSL-4K	-20	8280	6570	5000	3800	3,21	3,14	3,14	2,99	2,79	2,79	2,79	2,79
	-10	14210	11560	9220	7270	3,68	3,66	3,66	3,58	3,40	3,40	3,40	3,40
	-5	13110	10620	8460	6600	4,07	4,07	4,07	3,91	3,73	3,73	3,73	3,73
	5	10920	8760	6880	5270	4,13	4,07	4,07	3,91	3,73	3,73	3,73	3,73
2FSL-4K	-20	13700	11010	8700	6740	4,13	4,07	4,07	3,91	3,73	3,73	3,73	3,73
	-10	17940	14590	11800	9410	5,08	5,08	5,08	4,96	4,75	4,75	4,75	4,75
	-5	16520	13250	10380	8050	5,61	5,61	5,61	5,45	5,21	5,21	5,21	5,21
	5	13900	11230	8910	6910	6,83	6,83	6,83	6,63	6,39	6,39	6,39	6,39