

Goedhart VRB 42507 GP

Specifications


La marque	Goedhart
Type	VRB 42507 GP
Capacité kW	23.8
Réfrigérant	NH 3 (ammonia)
Nombre de ventilateurs	2
Espace Fan in mm	7
Dégivrage	None
m³/h	14.765
Remarques	Y.O.B. 2009
Remarks	76m2 // 2 fans 50Hz, 1.15A, 1050RPM
Volume	20dm3
Poids	180kg
Stock	1



Description

Used Goedhart VRB 42507 GP

Used evaporator build by Goedhart type VRB 42507 GP with 23.8kW and 2 fans 50Hz, 1.15A, 1050RPM, 14.765m³/h, 76m², 20dm³, weight 180kg. Y.O.B. 2009.

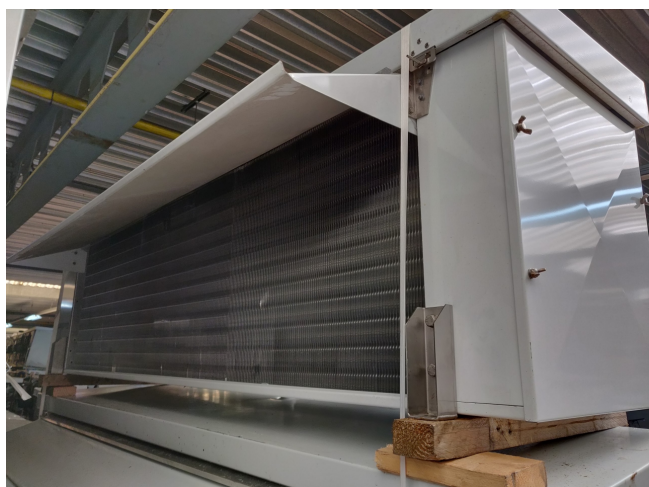



GEA Goedhart B.V.
Nijverheidsweg 6 4695 RC Sint-Maartensdijk, The Netherlands
Tel: +31(0)166 665 665 www.goedhart.nl

Man. no.: **PJV091385, VK0901307 / 290557050**

Type: **VRB 42507 GP**

Number: **3** of **4** Year: **2009**


Client ref.: **30085714**

M.: **180** kg TS: **+55/-6** °C

V: **20** dm³ PS: **22** bar

Fluid: **NH3 Pump** PT: **32** bar

Goedhart
Manufactured by GEA Goedhart s.r.o.

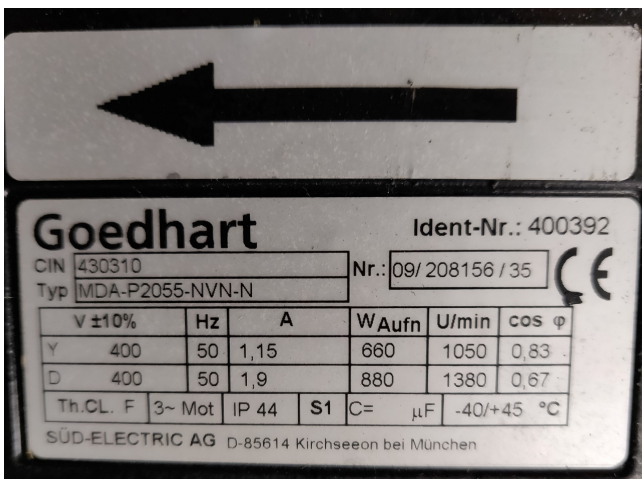



VRB

VRZ

Industriële luchtcooler / Industrial aircooler

Lamellaafstand / Fin spacing

7 mm

Type VRB VRZ	Type										Aanbrengen Connection						Aanbrengen Connection					
	Koelen Cooling		Vriesen Freezing		Luchtstrom Air flow	Luchtvolume Air volume	Oppervlakte Surface	Lengte Length	Breedte Width	Hogte Height	Koudemiddel Refrigerant			Watercooling Water cooled								
	In	Out	In	Out							In	Out	Uit	In	Out	Uit						
VRB	VRZ	VRB	VRZ	KW	KW	KW	m³/min	m³	m	B	H	D	E1	E2	E3	In	Out	Uit	In	Out	Uit	
4.2.40.7	0400	11,3	11,3	10,9	5503	44	11	106	1856	700	610	500	1456				21,3	26,7	22	1%	1%	2
6.2.40.7		17,9	14,7	15,4	10,9	6503	66	16	132	1856	800	610	600	1456			21,3	33,7	22	1%	1%	2
8.2.40.7		25,5	17,0	19,3	12,5	6205	89	21	157	1856	900	610	700	1456			21,3	33,7	22	1%	1%	2
4.2.45.7	0450	10,5	10,5	12,3	10405	61	15	130	2056	740	710	500	1656				21,3	33,7	22	1%	1%	2
6.2.45.7		26,8	21,3	22,3	16,1	9606	91	22	162	2056	840	710	600	1656			21,3	42,2	22	1%	1%	2
8.2.45.7		36,8	24,0	26,7	18,7	10706	119	26	186	2056	940	710	700	1656			21,3	42,2	22	1%	1%	2
4.2.50.7	0500	12,0	12,0	12,7	14105	78	18	149	2456	820	710	600	2056				21,3	42,2	22	1%	1%	2
6.2.50.7		20,0	15,0	16,0	14,0	14105	106	22	170	2456	920	710	700	2056			21,3	42,2	22	1%	1%	2
8.2.50.7		27,0	19,0	20,0	16,0	14105	134	26	194	2456	1020	710	800	2056			21,3	42,2	22	1%	1%	2
4.2.56.7	0560	14,5	14,5	15,9	21006	111	27	232	2656	960	910	700	2256				21,3	42,2	22	1%	1%	2
6.2.56.7		30,8	22,1	23,0	18,8	20078	167	40	285	2656	1080	910	800	2256			21,3	48,3	24	1%	1%	3