


Bitzer 4G.2

Specifications

Merk	Bitzer
Type	4G.2
Koudemiddel	Freon
kW at 0°C/+40°C	70,9
kW at -5°C/+40°C	58,7
kW at -10°C/+40°C	48,2
kW at -20°C/+40°C	31,2
kW at -30°C/+40°C	18,8
kW at -40°C/+40°C	10,1
kW at -45°C/+40°C	6,8
Onbelaste aanloop	✓
Capaciteits Controle	✓
Op stalen frame	✓
Druk veiligheids schakelaars	✓
Manometers	✓
Olie afscheider	✓
m ³ / h	102
Opmerkingen	Y.o.b. 2007
Afmetingen	1140x660x910 mm (LxWxH)
Stock	1

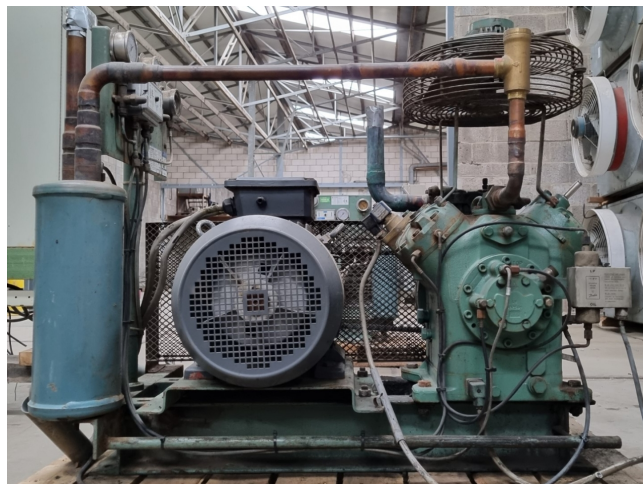

Description

Used Bitzer 4G.2

Gebruikte Bitzer 4G.2 open zuigercompressor op Freon met kijkglas. Compleet met een Techtop T3CR 160L-4 elektromotor - 50/60 Hz - 15/18 kW - 1445/1730 RPM, AC&R S-5692 olieafscheider en druk- en veiligheidsschakelaars/meters. De compressor heeft een cilinderinhoud van 102 m³/h bij 1750 RPM.

