


Bitzer 4T-12.2

Specifications

Merk	Bitzer
Type	4T-12.2
Koudemiddel	Freon
kW at 0°C/+40°C	32,7
kW at -5°C/+40°C	27,1
kW at -10°C/+40°C	22,3
kW at -20°C/+40°C	14,6
kW at -30°C/+40°C	8,9
kW at -40°C/+40°C	4,8
Op stalen frame	✓
Druk veiligheids	✓
schakelaars	
Manometers	✓
Vloeistof tank	✓
Vloeistof tank ltr.	35
Olie afscheider	✓
Filter droger	✓
Kijk glas	✓
m ³ / h	39,4
Afmetingen	1300x590x1380 mm (LxWxH)
Stock	1

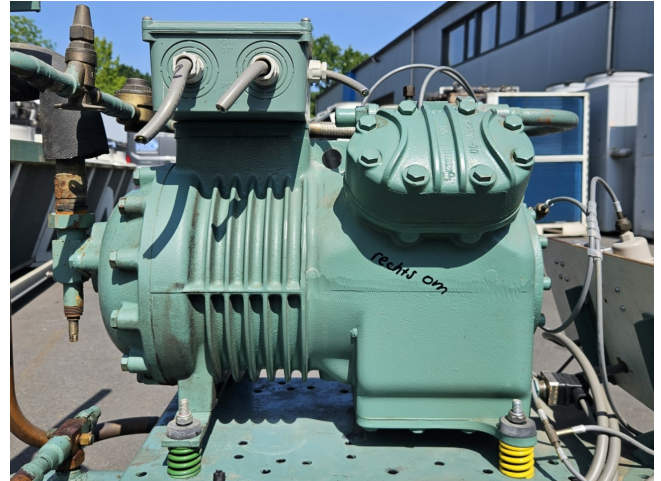

Description

Used Bitzer 4T-12.2

Gebruikte Bitzer 4T-12.2Y-40P unit op Freon. Compleet met een Bitzer 4T-12.2Y-40P semi-hermetische zuigercompressor, vloeistofvat, olieafscheider en kijkglas op een stalen frame. De compressor heeft een slagvolume van 50 Hz bij 39,36 m³/u en 60 Hz bij 47,5 m³/u.

*Waarom kiezen voor HOSBV? Wij zijn niet alleen de grootste specialist in gebruikte koeltechniek in Europa, maar leveren ook alle apparatuur inclusief uitgebreide keuring, garantie en industriële reiniging. *Optioneel kunnen wij ook een nieuwe laklaag aanbrengen en de logistiek verzorgen.

