

Carrier 30 RA 160

Specifications

Merk	Carrier
Type	30 RA 160
Product type	Air Cooled Chiller
Capaciteit kW	157
Capaciteit Tons	44,6
Koudemiddel	Freon
Koudemiddel Type	R 407C
Gewicht in kg.	1210
Afmetingen	2280x2070x1330 mm (LxWxH)
Opmerkingen	y.o.b. 2002 // 4x Compressor Performer SZ185S4CC // Including Heat Exchanger
Stock	1






Description

Used Carrier 30 RA 160

y.o.b. 2002 // 4x Compressor Performer
SZ185S4CC



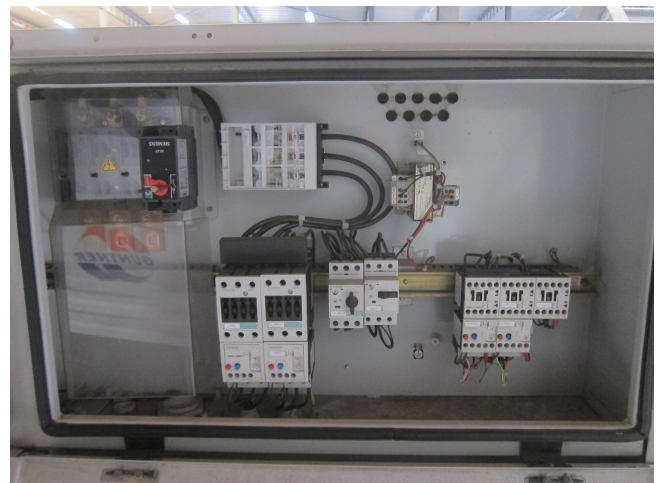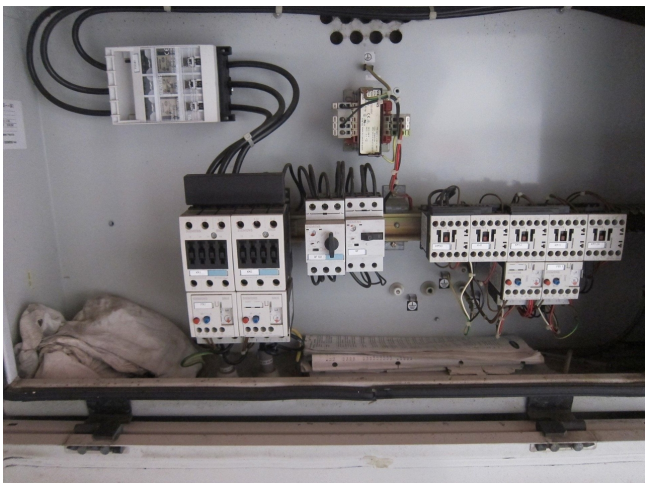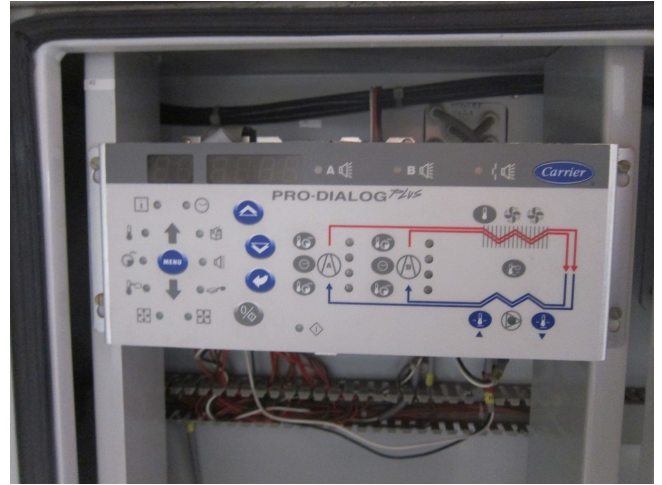

ISO 9001 AND ISO 14001

1 - NUMERO DE SÉRIE SERIAL NUMBER	12T236637	
2 - MODÈLE - MODEL	30RA-160-A0128-PEE--	
3 - VARIANTE - VARIANT	30RA	
4 - ANNÉE DE FABRICATION ET DATE D'ESSAI YEAR OF MANUFACTURING AND TEST DATE	2002/07/04	
5 - FLUIDE - MEDIUM R	407C	CE 0062
6 - GROUPE - GROUP	2	
7 - CHARGES CIRCUIT A	18,7 kg	8 - CHARGES CIRCUIT B 18,7 kg
9 - FLUIDE DE CONFINEMENT CONFINEMENT MEDIUM	23 - --AZOTE--NITROGENE--	
10 - PRESSION ADMISSIBLE MIN/MAX ALLOWABLE PRESSURE MIN/MAX (PSI)	21 - HAUTE PRESSION HIGH PRESSURE - 0,9 32,0 bar	22 - BASSE PRESSION LOW PRESSURE - 0,9 25,0 bar
11 - TEMPÉRATURES ADMISSIBLE MIN/MAX ALLOWABLE TEMPERATURE MIN/MAX (TS)	- 20 72 °C	- 20 62 °C
12 - PRESSION DE DÉCLENCHEMENT DES PRESSOSTATS PRESSURE SWITCH SETTING	29,0 bar	
13 - PRESSION DE DÉCLENCHEMENT DES SOUPAPES SAFETY RELIEF VALVE SETTING	0,0 bar	25,0 bar
14 - PRESSION D'ESSAI D'ÉTANCHÉITÉ DE L'UNITÉ UNIT LEAK TEST PRESSURE	15,0 bar	
15 - TENSION VOLTAGE	400 V	10 10 % 16 - PHASES 3
17 - FRÉQUENCE FREQUENCY	50 Hz	18 - I MAXIMALE MAXIMUM AMPS 128,2 0,0 A
19 - PUISSANCE ABSORBÉE MAX MAX POWER INPUT	77,2 0,0 kW	
20 - POIDS NET NET WEIGHT	1210 kg	

MANUFACTURING IN FRANCE BY
CARRIER S.A.
01120 - MONTLUEL - FRANCE
A SUBSIDIARY OF CARRIER CORPORATION
SYRACUSE NEW YORK
UNITED STATES OF AMERICA

Carrier