

Bock HGX5/945-4 S cool/freeze package

Specifications




Merk	Bock
Type	HGX5/945-4 S cool/freeze package
Koudemiddel	Freon
kW at 0°C/+40°C	65.30
kW at -5°C/+40°C	54.20
kW at -10°C/+40°C	44.50
kW at -20°C/+40°C	28.70
kW at -30°C/+40°C	17.10
Op stalen frame	✓
Druk veiligheids	✓
schakelaars	
Manometers	✓
Vloeistof tank	✓
Vloeistof tank ltr.	30
Olie afscheider	✓
Kijk glas	✓
Opmerkingen	Our capacity table is based on Manufacturer spec. We would like to know which refrigerant is in your system
Package / Rack	✓
Stock	1



Description

Used Bock HGX5/945-4 S cool/freeze package

Gebruikte Bock HGX5/945-4 S zuigercompressor bestaande uit de volgende elementen: olieafscheider, drukveiligheidsschakelaars, manometers, vloeistofontvanger en een kijkglas. * Waarom kiezen voor HOSBV? We waren niet alleen de grootste specialist in gebruikte koeling in Europa, maar we leveren ook alle apparatuur, inclusief een uitgebreide test, garantie en industriële reiniging. Optioneel kunnen we de logistiek regelen.

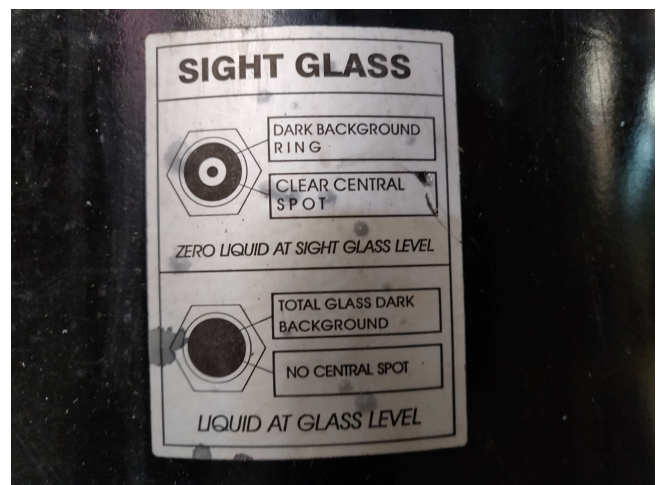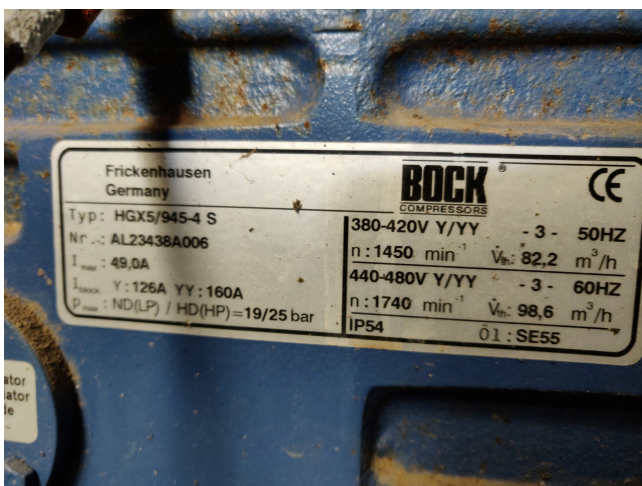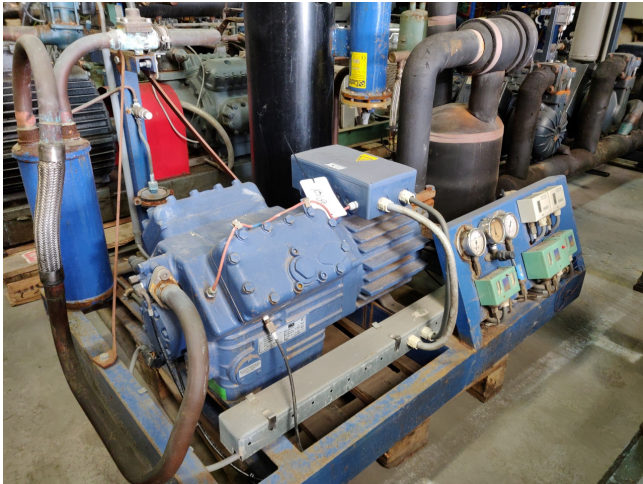

HGX5/945-4 S

Engine: 380-420V YYY -3- 50Hz PW
Refrigerant: R404A, R507

GEA Commercial Compressors



Subject:

Performance data table

Application: Refrigeration & AC
Reference temperature: Dew point
Supply frequency: 50 Hz
Voltage: 400 V
Suction gas temperature: 20 °C
Subcooling (outside cond.): 0 K

tc [°C]		to [°C]									
		10.0	5.0	0.0	-5.0	-10.0	-15.0	-20.0	-25.0	-30.0	
30.0	Q [W]		92000	77300	64400	53000	43100	34500	27200	20900	
	P [kW]		18.30	17.70	16.90	16.00	14.90	13.60	12.30	10.80	
	I [A]		31.70	30.80	29.60	28.20	26.60	24.90	23.10	21.40	
35.0	Q [W]		85000	71300	59300	48700	39600	31600	24800	19100	
	P [kW]		20.00	19.10	18.10	17.00	15.70	14.20	12.70	11.10	
	I [A]		34.30	33.00	31.50	29.70	27.80	25.80	23.70	21.70	
40.0	Q [W]		77900	65300	54200	44500	36000	28700	22500	17100	
	P [kW]		21.70	20.60	19.40	18.00	16.50	14.80	13.10	11.30	
	I [A]		37.10	35.40	33.40	31.20	28.90	26.60	24.20	21.90	
45.0	Q [W]		70900	59200	49000	40100	32500	25800	20100	15200	
	P [kW]		23.40	22.00	20.60	18.90	17.20	15.30	13.40	11.40	
	I [A]		39.90	37.70	35.30	32.70	30.00	27.30	24.60	22.00	
50.0	Q [W]		63700	53100	43900	35800	28900	22900	17700	13200	
	P [kW]		25.00	23.40	21.70	19.80	17.80	15.70	13.50	11.30	
	I [A]		42.80	40.10	37.20	34.10	31.00	27.90	24.80	22.00	
55.0	Q [W]		56500	47000	38700	31500	25200	19900	15200	11200	
	P [kW]		26.70	24.80	22.80	20.60	18.40	16.00	13.60	11.10	
	I [A]		45.60	42.40	38.90	35.40	31.80	28.30	24.90	21.80	