

Trane CCUD 209

Specifications




Merk	Trane
Type	CCUD 209
Product type	Air Cooled Chiller (split-unit)
Capaciteit kW	318.2
Capaciteit Tons	90,47
Koudemiddel	Freon
Gewicht in kg.	2280
Stock	1





Description

Used Trane CCUD 209

Gebruikt maar stil in goede staat
luchtgekoelde chiller (split unit) type
CCUD 209 (model CCUD voor gebruik
met externe luchtgekoelde condensor)
Zie voor alle andere specificaties de
afbeelding van het typeplaatje van de
fabrikant of het bijgevoegde pdf-
bestand (indien beschikbaar) "*
Waarom kiezen voor HOSBV? Waren
niet alleen de grootste specialist in
gebruikte koeling in Europa, maar we
leveren ook alle apparatuur, inclusief
een uitgebreide test, garantie en
industriële reiniging. Optioneel kunnen
we verzend- en exportdocumenten
regelen. "

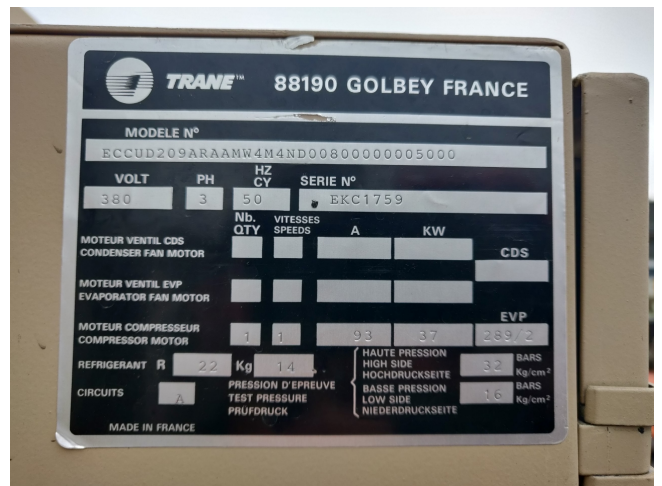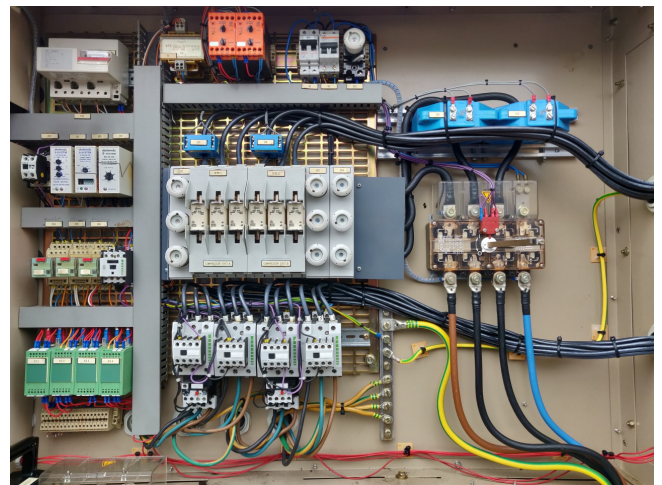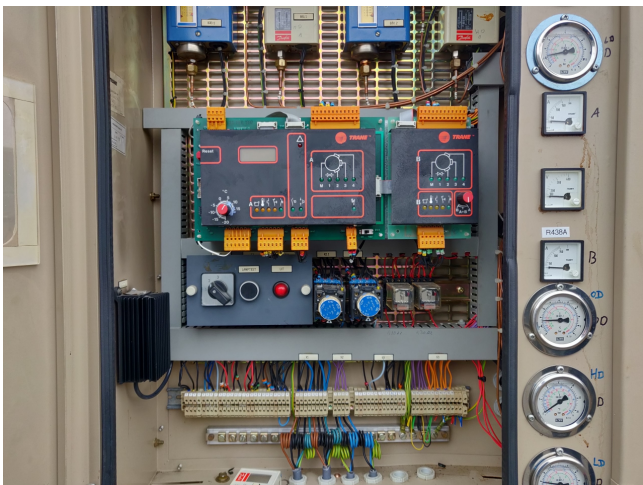

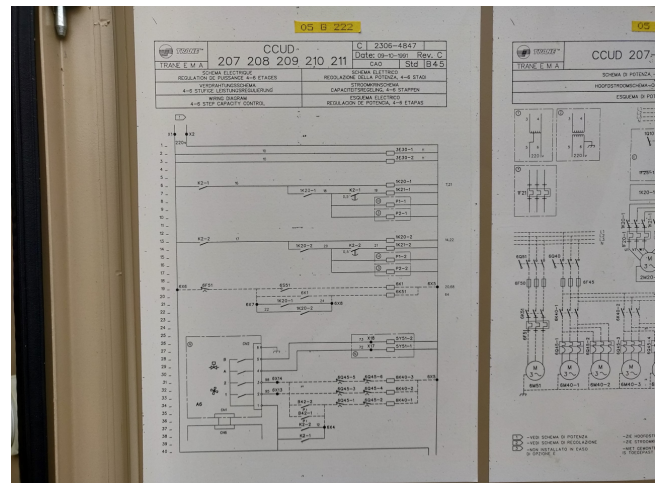

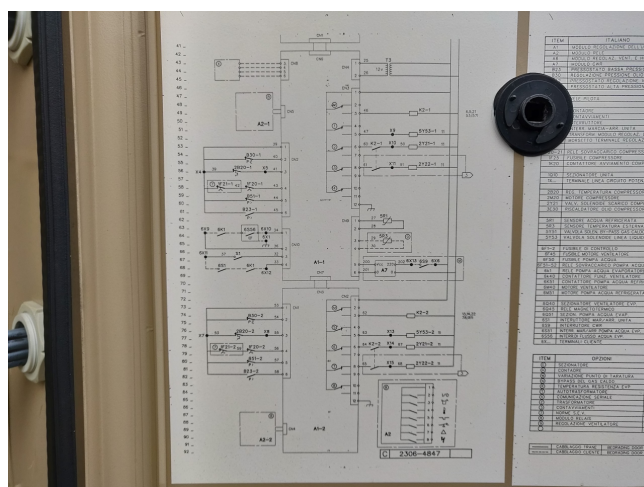

Model	CW10	20	30	40	50	60	70	80	90	100		
Nominal cooling capacity (1)	kW	135.2	106.2	199.3	250.1	279.1	318.3	344.5	380.4	454.1	555.0	660.7
Nominal cooling capacity (2)	kW	31.4	36.8	43.9	58.9	64.5	71.5	79.3	86.7	93.7	107.9	122.0
Input (1)		2	2	2	2	2	2	2	2	2	2	2
Input (2)		2	2	2	2	2	2	2	2	2	2	2
Compressor/circuits												
Capacity share (%)	%	75-50-25	75-50-25	85-50-25	75-50-25	81-44-22	85-50-25	81-44-29	83-50-25	75-50-25	71-49-21	75-50-25
Bated load ratio (1)	A	74	90	112	162	166	170	191	212	226	267	308
Bated load ratio (2)	A	144	178	218	313	385	389	443	464	530	744	782
Evaporator water content	1	114	107	102	88	88	164	164	140	188	228	233
Condenser water content	1	22	20	20	32	45	52	52	60	62	73	
R22 operating charge	kg	30	32	40	48	45	62	62	68	80	108	120
Unit operating charge	kg	1300	1300	1420	1800	1950	2280	2220	2340	2550	3510	3730

(1) At +7°C chilled water leaving and 32°C condenser water leaving temperatures. Standard size heat exchangers.
(2) At 415/350 at 5 bar suction pressure, 25 bar discharge pressure.
(3) At part winding start. One compressor at full load, the second one starting. On sizes 2X9R, 210 R and 214 E the compressor starting is the largest one of the two.
(4) All capacity and weight data apply to the series CGWD units (with built-in water cooled condensers). For series CCUD units (without condenser, for use with remote air cooled condensers) refer to your Trane Sales Office for information.