

Goedhart VRB 42507 GP

Specifications


Merk	Goedhart
Type	VRB 42507 GP
Capaciteit kW	23.8
Koudemiddel	NH 3 (ammonia)
Aantal Ventilatoren	2
Lamel afstand in mm	7
Ontdooiing	None
m ³ /h	14.765
Opmerkingen	Y.O.B. 2009
Remarks	76m2 // 2 fans 50Hz, 1.15A, 1050RPM
Volume	20dm3
Gewicht	180kg
Stock	1



Description

Used Goedhart VRB 42507 GP

Used evaporator build by Goedhart type VRB 42507 GP with 23.8kW and 2 fans 50Hz, 1.15A, 1050RPM, 14.765m³/h, 76m², 20dm³, weight 180kg. Y.O.B. 2009.

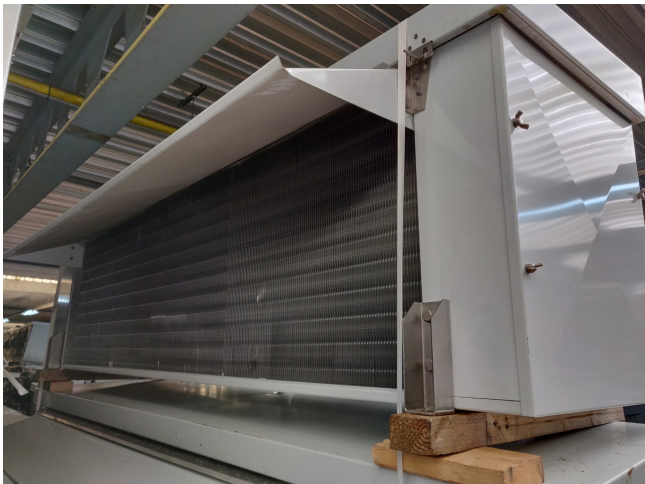



GEA Goedhart B.V.
Nijverheidsweg 6 4695 RC Sint-Maartensdijk, The Netherlands
Tel: +31(0)166 665 665 www.goedhart.nl

Man. no.: **PJV091385, VK0901307 / 290557050**

Type: **VRB 42507 GP**

Number: **3** of **4** Year: **2009**

Client ref.: **30085714**

M.: **180** kg TS: **+55/-6** °C


V: **20** dm³ PS: **22** bar

PT: **32** bar

Fluid: **NH3 Pump**

Goedhart

Manufactured by GEA Goedhart s.r.o.

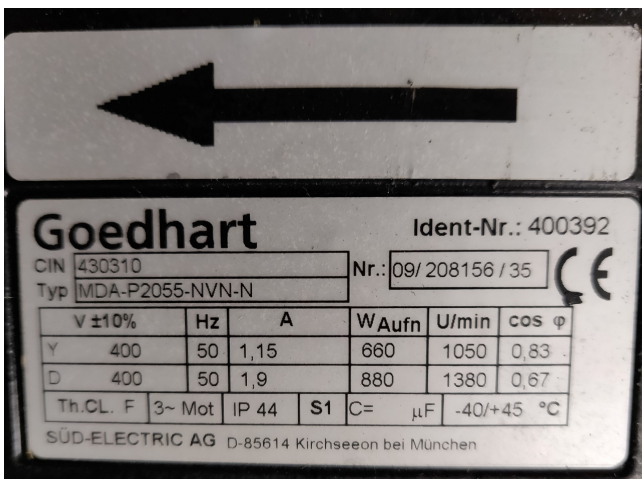



VRB

VRZ

Industriële luchtcooler / Industrial aircooler

Lamellaafstand / Fin spacing

7 mm

Type VRB VRZ	Type				Afmetingen Dimensions										Afmetingen Dimensions		Afmetingen Dimensions				
	Cooling Koude- vermogen		Warming Verwarm- vermogen		N ₂ gas volume m³/h	Luchtstroom Air flow m³/h	Oppervlakte Surface area m²	Gewicht Weight kg	L	B	H	D	E1	E2	E3	Koudemiddel Refrigerant		Waterkoeling Water cooling			
	In °C	Out °C	In °C	Out °C												In	Out	Water In	Water Out		
4.2.40.7	0400	12,2	11,3	10,9	6563	44	11	106	1856	700	610	500	1456			21,3	26,7	22	1%	1%	2
6.2.40.7		17,9	14,7	15,4	10,9	6563	66	16	132	1856	800	610	600	1456		21,3	33,7	22	1%	1%	2
8.2.40.7		25,5	17,0	19,3	12,5	6285	89	21	157	1856	900	610	700	1456		21,3	33,7	22	1%	1%	2
4.2.45.7	0450	10,5	16,5	15,6	12,3	10405	61	15	130	2056	740	710	500	1656		21,3	33,7	22	1%	1%	2
6.2.45.7		26,8	21,3	22,3	16,1	9608	91	22	162	2056	840	710	600	1656		21,3	42,2	22	1%	1%	2
8.2.45.7		36,8	24,0	26,7	18,7	9096	119	28	194	2056	940	710	700	1656		21,3	42,2	22	1%	1%	2
4.2.50.7	0500	12,2	16,7	14,0	1176	118	18	166	2456	820	710	600	2056		21,3	42,2	22	1%	1%	2	
6.2.50.7		22,0	17,0	19,3	15,4	10405	144	24	200	2456	920	710	700	2056		21,3	42,2	22	1%	1%	2
8.2.50.7		30,0	21,3	22,3	18,7	9096	172	30	232	2456	1020	710	800	2056		21,3	42,2	22	1%	1%	2
4.2.56.7	0560	14,0	19,3	16,1	13078	167	20	200	2656	900	810	700	2256		21,3	48,3	34	1%	1%	3	
6.2.56.7		26,8	21,3	22,3	18,7	10405	200	28	232	2656	1000	810	800	2256		21,3	48,3	34	1%	1%	3