

Güntner S-GFD 080B/2x8-N(D)-F6/2P

Specifications

Marka	Güntner
Typ	S-GFD 080B/2x8-N(D)-F6/2P
Typ produktu	Drycooler
Ogólna wydajność w kW	1087
Liczba wentylatorów	16
Prdkość obrotów wentylatora (obr/min)	880/660
Czynnik chłodzący	Glycol
Przepływ powietrza w m ³ /h	307.200
wentylatory o średnicy Ø 800 mm	
Powierzchnia (m2)	4.027
Objętość rurki	539 dm ³
Rozmiary (LxWxH)	10.100x2350x2250 mm
Waga	3.470 kg
Uwagi	Y.o.b. 2005
Stock	2







Description

Used Güntner S-GFD 080B/2x8-N(D)-F6/2P

Used Guntner S-GFD 080B/2x8-N(D)-F6/2P drycooler. Complete with 16 Güntner fans 50 Hz - 1,45/0,61 kW - 880/660 RPM - diameter 800 mm. Mentoined capacity is at delta. Capacity at star 883 kW and 236.800 RPM.

*All components of this used condensors will be tested on good working, leak free condition (electro engines), condensing block, bearings. Choosing HOSBV means buying with warranty. We perform a industrial cleaning and rust spots will be covered. Also, we can arrange your shipment.

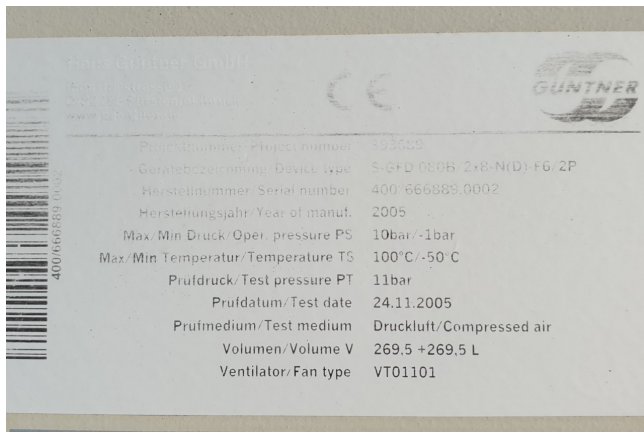

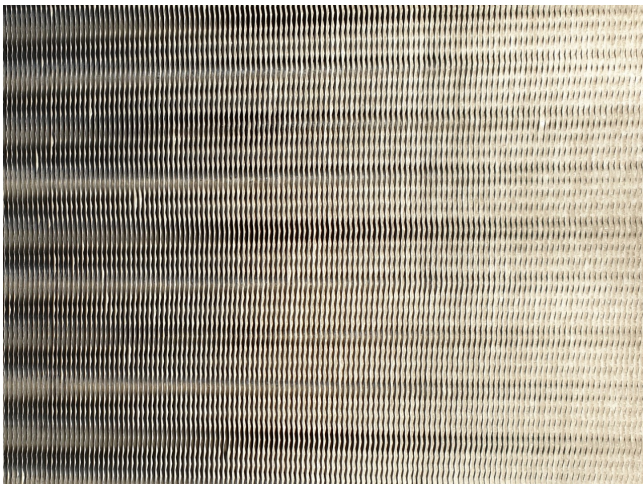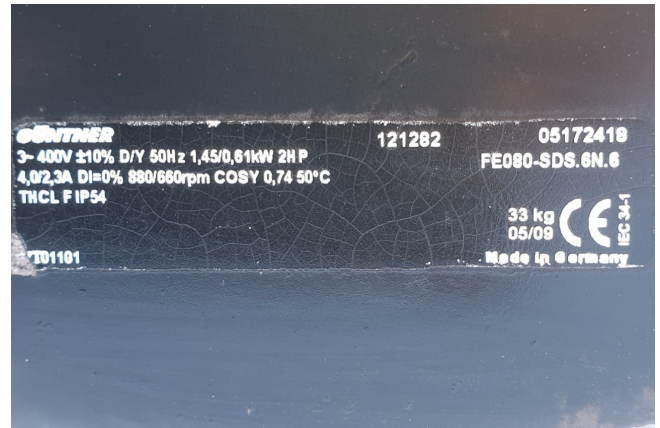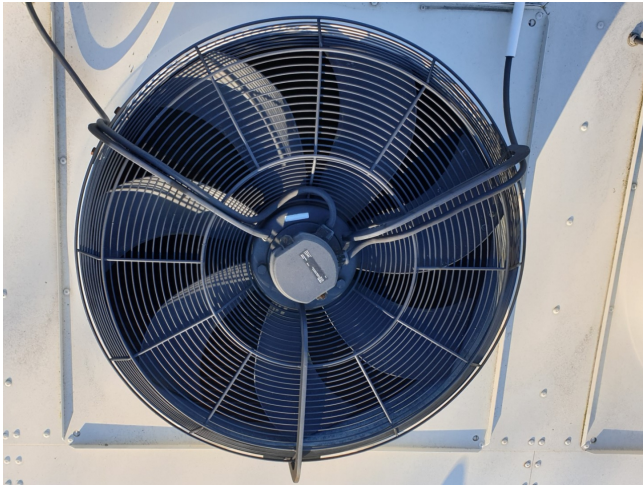

Typ	$\dot{Q}_{L,n}$ Nennleistung Ethylene glycol Nominal capacity Ethylene glycol 34 Vol.% 40/35 °C 25 °C		$\dot{V}_L$ Luftvolumenstrom Air volume flow		Ethylene glycol Ethylene glycol		aufgenommene elektrische Leistung consumed power		Motornenn- daten je Ventilator Nominal ratings per fan		Schalldruck- pegel Sound pressure level dB(A)10m	Stoß- druck Number of branches			
	Type	Type	Volume flow m³/h	Druckverlust m³/h	Pressure drop bar	p _T total	Δ	Y	Δ	Y					
Δ	Y	Δ	Y	Δ	Y	Δ	Y	Δ	Y	Δ/Y	Δ	Y			
N	080.1A/2x2	222	188	82400	64400	43	36	0,6	0,4	6,8	4,5	D/D	54	47	5
	080.1B/2x2	270	220	76800	59200	52	42	0,7	0,5	6,9	4,6	D/C	54	47	6
	080.1A/2x3	328	278	123600	96600	63	54	0,4	0,3	10,2	6,8	D/D	56	49	3
	080.1B/2x3	405	330	112200	88800	77	63	0,7	0,5	10,3	6,8	D/C	56	49	4
	080.1A/2x4	425	360	164800	128800	81	69	0,3	0,2	13,6	9,0	D/D	57	50	2
	080.1B/2x4	537	437	153600	118400	103	84	0,6	0,4	13,8	9,1	D/C	57	50	3
	080.1A/2x5	550	466	206000	161000	106	90	0,6	0,4	17,0	11,3	D/D	58	51	2
	080.1B/2x5	650	529	192000	148000	125	102	0,4	0,3	17,2	11,4	D/C	58	51	2
	080.1A/2x6	675	572	247200	193200	130	110	1,0	0,7	20,4	13,6	D/D	58	51	2
	080.1B/2x6	796	647	230400	177600	152	124	0,6	0,4	20,6	13,7	D/C	58	51	2
080.1A/2x7	801	677	288400	225400	133	130	1,5	1,1	23,8	15,6	D/D	59	52	2	
080.1B/2x7	941	765	268800	207200	181	147	1,0	0,7	24,1	16,0	D/C	59	52	2	
080.1A/2x8	926	783	329600	257600	178	150	2,2	1,6	27,2	18,1	D/D	59	52	2	
080.1B/2x8	1087	883	307200	238800	208	169	1,4	1,0	27,5	18,3	D/C	59	52	2	
080.1A/2x2	183	151	60000	46800	35	29	0,7	0,5	3,1	2,0	C/B	47	41	6	
080.1B/2x2	215	171	56000	42800	41	33	1,0	0,6	3,1	2,0	B/B	47	41	6	
080.1A/2x3	275	227	90000	70200	53	44	0,7	0,5	4,6	2,9	C/B	49	43	4	
080.1B/2x3	321	256	84000	64200	62	49	0,8	0,5	4,7	2,9	B/B	49	43	5	
080.1A/2x4	365	302	120000	93600	70	58	0,7	0,5	4,2	3,8	C/B	50	44	3	
080.1B/2x4	430	341	112000	85600	82	66	0,9	0,6	6,2	3,9	B/B	50	44	4	