


Bitzer 4DC-7.2Y-40S Condensing unit

Specifications

Marka	Bitzer
Typ	4DC-7.2Y-40S Condensing unit
Czynnik chłodzący	Freon
kW at 0°C/+40°C	21,1
kW at -5°C/+40°C	17,5
kW at -10°C/+40°C	14,3
kW at -20°C/+40°C	9,3
kW at -30°C/+40°C	5,5
kW at -40°C/+40°C	2,8
Podstawa na stalowej ramie	✓
Ciśnieniowe przełączniki bezpieczeństwa	✓
Obiornik cieczy	✓
Obiornik cieczy ltr.	15
Osuszający filter lini cieczy	✓
Okno widokowe	✓
m ³ / h	26,9 m ³ /h at 50 Hz & 32,4 m ³ /h at 60 Hz
Uwagi	Y.o.b. 2004
Condensing Unit	✓
Rozmiary	1500x1000x780 mm (LxWxH)
Stock	1

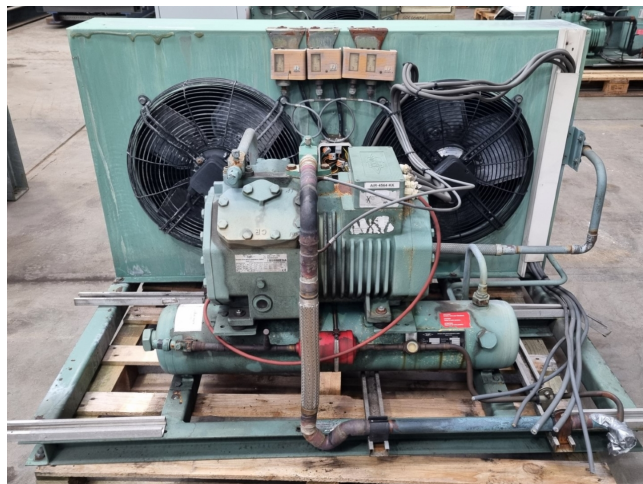

Description

Used Bitzer 4DC-7.2Y-40S Condensing unit




Used Bitzer condensing unit on Freon. Complete with a Bitzer 4DC-7.2Y-40S semi-hermetic reciprocating compressor, Bitzer F152H liquid receiver with a volume of 15 liter, condenser with 2 Ziehl-Abegg FB045-4EK.4F.6L fans - 50/60 Hz - 0,41/0,57 kW - 1320/1520 RPM - diameter 450 mm, pressure and safety switches, liquid line filter drier and a sight glass. The compressor has a displacement of 26,9 m³/h at 50 Hz & 32,4 m³/h at 60 Hz.

*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we solely deliver our orders after performing an extensive test and an industrial cleaning. If requested we are happy to



Your partner for used commercial and
industrial refrigeration equipment

arrange your logistics.

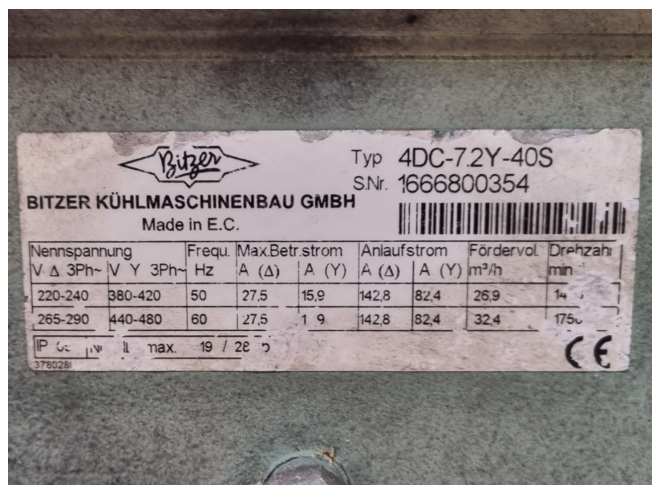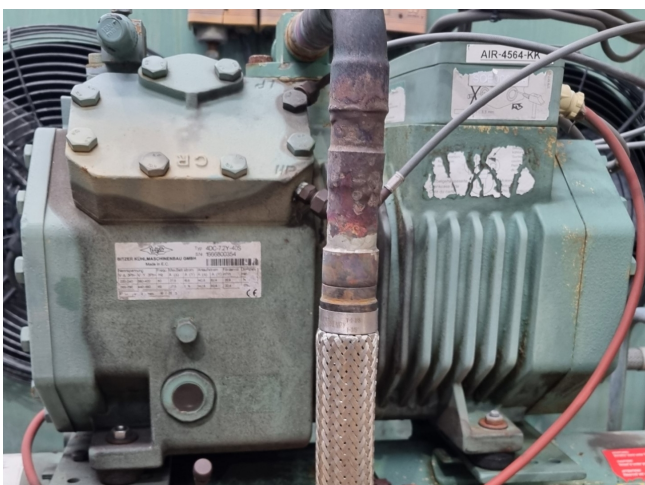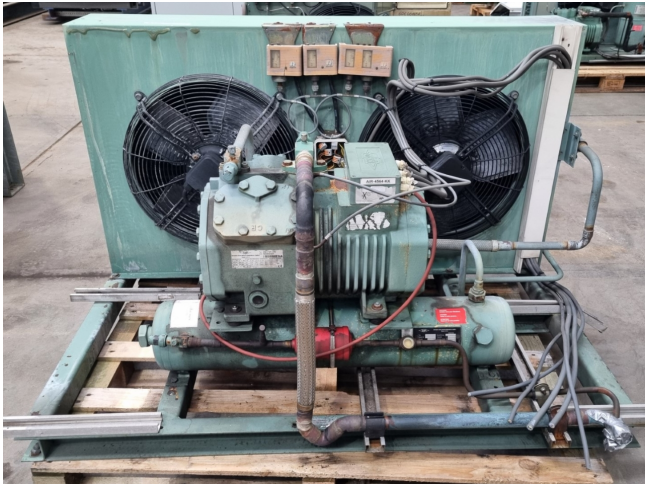

Typ 4DC-7.2Y-40S
SNr. 1666800354

BITZER KÜHLMASCHINENBAU GMBH
Made in E.C.

Nennspannung	Frequ.	Max.Betr.strom	Anlaufstrom	Fördervol.	Drehzahl
V Δ 3Ph- V Y 3Ph-	Hz	A (Δ) A (Y)	A (Δ) A (Y)	m³/h	min
220-240	380-420	50 27.5 15.9	142.8 82.4	26.9	14
265-290	440-480	60 27.5 19.9	142.8 82.4	32.4	1750

P 1 max. 19 / 28 °C

