


Bitzer 4T-12.2

Specifications

Marka	Bitzer
Typ	4T-12.2
Czynnik chłodzący	Freon
kW at 0°C/+40°C	32,7
kW at -5°C/+40°C	27,1
kW at -10°C/+40°C	22,3
kW at -20°C/+40°C	14,6
kW at -30°C/+40°C	8,9
kW at -40°C/+40°C	4,8
Podstawa na stalowej ramie	✓
Ciśnieniowe przełączniki bezpieczeństwa	✓
Wskaźniki ciśnienia	✓
Obiornik cieczy	✓
Obiornik cieczy ltr.	35
Separator oleju	✓
Osuszający filter lini cieczy	✓
Okno widokowe	✓
m ³ / h	39,4
Rozmiary	1300x590x1380 mm (LxWxH)
Stock	1

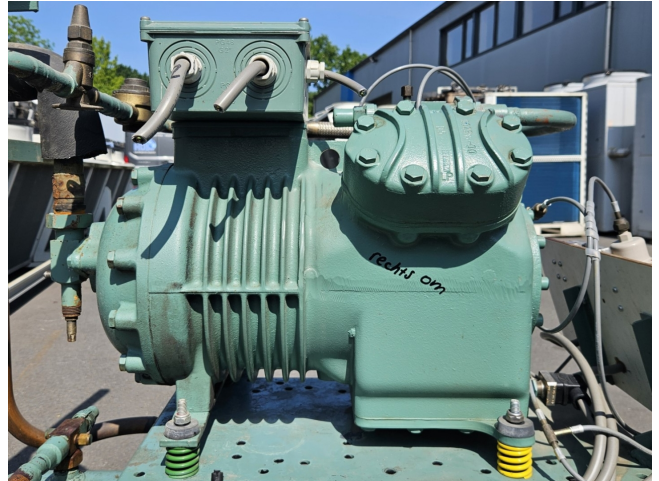

Description

Used Bitzer 4T-12.2

Used Bitzer 4T-12.2Y-40P unit on Freon. Complete with a Bitzer 4T-12.2Y-40P semi-hermetic reciprocating compressor, liquid receiver, oil separator and sight glass on a steel base frame. The compressor has a displacement of 50 Hz at 39,36 m³/h and 60 Hz at 47,5 m³/h.

*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.

*Optional we can also perform a new paint job and arrange the logistics.

