


Bitzer 66F-80.2Y-40P / 6F-40.2Y-40P (x2)

Specifications

Marka	Bitzer
Typ	66F-80.2Y-40P / 6F-40.2Y-40P (x2)
Czynnik chłodzący	Freon
kW at -5°C/+40°C	202,0
kW at -10°C/+40°C	166,2
kW at -20°C/+40°C	108,5
kW at -30°C/+40°C	65,9
kW at -40°C/+40°C	35,1
kW at -45°C/+40°C	23,4
Kontrolka wydajności	✓
Podstawa na stalowej ramie	✓
Ciśnieniowe przełączniki bezpieczeństwa	✓
Okno widokowe	✓
m ³ / h	303,2
Uwagi	Y.o.b. 2010
Waga kg.	519
Rozmiary	1600x550x850 mm (LxWxH)
Stock	1

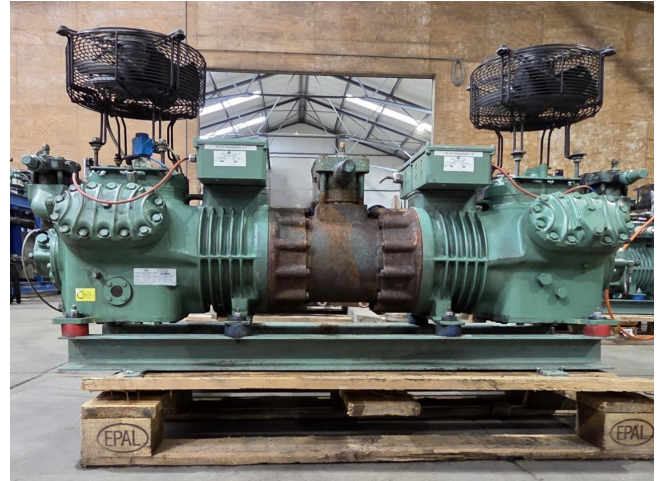

Description

Used Bitzer 66F-80.2Y-40P / 6F-40.2Y-40P (x2)

Used Bitzer 66F-80.2Y-40P semi-hermetic reciprocating tandem compressor on Freon. Complete with a Bitzer 6F-40.2Y-40P (x2) semi-hermetic reciprocating compressors, 1 Ziehl-Abegg FE031-4DZ.0C.3 fan - 0,12/0,19 kW - 1410/1610 RPM - 50/60 Hz, 1 Ziehl-Abegg FN031-4DZ.0C.A7P2 fan - 0,11/0,17 kW - 1420/1690 RPM - 50/60 Hz, pressure safety switches and sight glasses. The compressor has a displacement of 303,2 m³/h at 50 Hz and 365,9 m³/h at 60 Hz.

*Why choose for HOSBV? We are not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. *If requested we are happy to



Your partner for used commercial and industrial refrigeration equipment

arrange your logistics.

