


Bitzer 4TCS-12.2Y-40P

Specifications

| | |
|---------------------------|---|
| Marka | Bitzer |
| Typ | 4TCS-12.2Y-40P |
| Czynnik chłodzący | Freon |
| kW at 0°C/+40°C | 32,1 |
| kW at -5°C/+40°C | 26,1 |
| kW at -10°C/+40°C | 20,9 |
| kW at -20°C/+40°C | 12,9 |
| kW at -30°C/+40°C | 7,2 |
| kW at -40°C/+40°C | 4,3 |
| Poziom oleju w systemie ✓ | |
| m3 / h | 50 Hz - 41,3 m ³ /h & 60 Hz - 49,9 m ³ /h |
| Uwagi | Y.o.b. 2008 |
| Waga kg. | 141 |
| Rozmiary | 720x400x400 mm (LxWxH) |
| Stock | 1 |

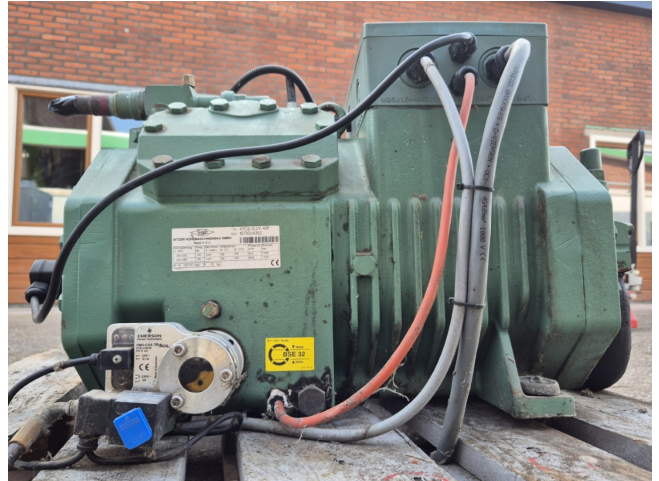

Description

Used Bitzer 4TCS-12.2Y-40P

Used Bitzer 4TCS-12.2Y-40P semi-hermetic reciprocating compressor on Freon with an oil level system AC&R. The compressor has a displacement of 41,3 m³/h at 50 Hz & 49,9 m³/h at 60 Hz.

*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.

*Optional we can also perform a new paint job and arrange the logistics.

