


Bock F5 (X2) Cool/freeze installation

Specifications

Marka	Bock
Typ	F5 (X2) Cool/freeze installation
Czynnik chłodzący	Freon
kW at +10°C/+40°C	166.66
kW at 0°C/+40°C	118.80
kW at -5°C/+40°C	98.30
kW at -10°C/+40°C	80.02
kW at -20°C/+40°C	49.88
kW at -30°C/+40°C	27.96
kW at -40°C/+40°C	13.78
kW at -45°C/+40°C	9.44
Podstawa na stalowej ramie	✓
Ciśnieniowe przełączniki bezpieczeństwa	✓
Wskaźniki ciśnienia	✓
Obiornik cieczy	✓
Separator oleju	✓
Osuszający filter lini cieczy	✓
Okno widokowe	✓
Uwagi	# // Electromotor: 11 kW at 1445 RPM // Pulley EM: 180 / Pulley Compr: 230

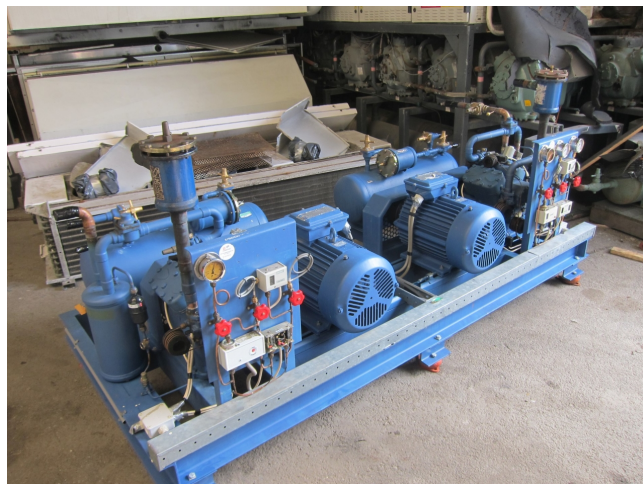

	freon types
Paragid / Rack	R404a - R22 or other
Rozmiar	2500x1100x1200 mm (LxWxH)
Stock	1



Description


Used Bock F5 (X2) Cool/freeze installation

Used Bock F5 (X2) cool/freeze installation, complete with pressure safety switches, pressure gauges, liquid receiver, oil separator, liquid line filter and sight glass.

Why choose for HOSBV? We are not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.

*Optional we can also perform a new paint job and arrange the logistics.

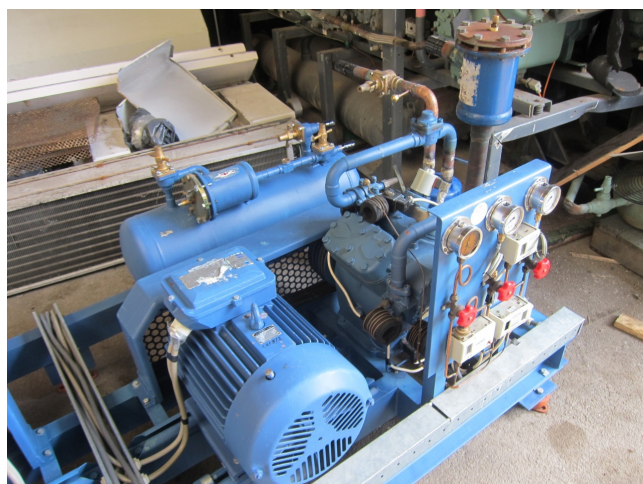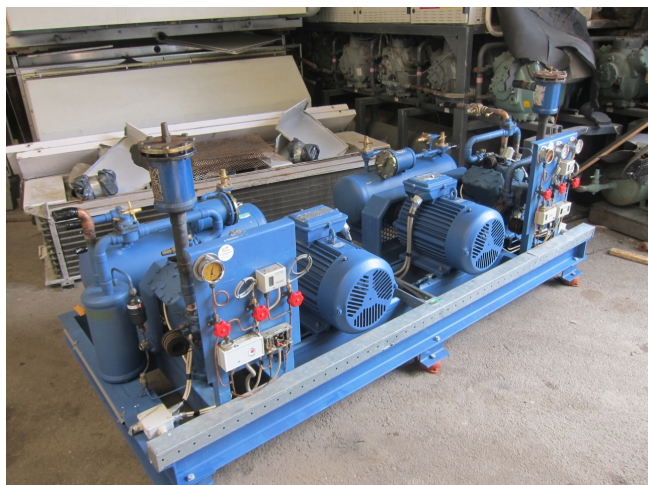

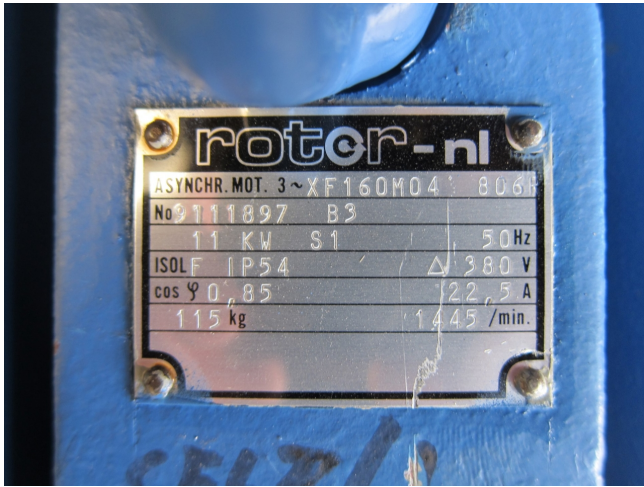

R404A/R507		Performance data												1.450 rpm	
Type	Cond. temp. °C	Cooling capacity Q ₀ [W]				Power P [kW]									
		Evaporating temperature °C													
		10	5	0	-5	-10	-15	-20	-25	-30	-35	-40	-45		
FX2	30	Q 13423	11418	9621	8020	6606	5366	4290	3366	2584	1933	1402	979		
		P 2,21	2,19	2,13	2,05	1,94	1,80	1,65	1,48	1,31	1,12	0,94	0,75		
	40	Q 11561	9785	8201	6797	5562	4485	3555	2761	2092	1537	1085	724		
		P 2,65	2,56	2,44	2,30	2,13	1,95	1,76	1,55	1,34	1,12	0,91	0,70		
FX3	30	Q 9652	8113	6749	5548	4500	3593	2816	2159	1609	1157	791			
		P 3,03	2,88	2,71	2,51	2,30	2,07	1,83	1,59	1,34	1,10	0,86			
	40	Q 28402	24163	20377	17011	14041	11442	9187	7251	5608	4231	3096	2195		
		P 3,92	3,97	3,84	3,63	3,36	3,04	2,67	2,28	1,86	1,43	1,00	0,70		
FX4	30	Q 24498	20763	17437	14495	11911	9657	7710	6042	4628	3442	2458	1650		
		P 4,97	4,89	4,66	4,41	4,11	3,77	3,40	3,01	2,61	2,21	1,83	1,46		
	40	Q 20584	17356	14408	11985	9791	7889	6254	4860	3680	2690	1862			
		P 5,90	5,62	5,28	4,89	4,47	4,02	3,56	3,08	2,61	2,15	1,72			
FX5	30	Q 53909	45836	38585	32117	26393	21373	17019	13292	10151	7559	5476	3862		
		P 8,34	8,30	8,09	7,73	7,25	6,68	6,04	5,36	4,66	3,96	3,29	2,69		
	40	Q 46772	39538	33069	27326	22270	17862	14063	10834	8135	5928	4173	2832		
		P 10,09	9,75	9,27	8,67	7,98	7,21	6,41	5,59	4,78	4,00	3,27	2,63		
FX14/1166	30	Q 39157	32814	27179	22214	17880	14137	10946	8268	6064	4295	2922			
		P 11,44	10,83	10,10	9,28	8,40	7,47	6,53	5,59	4,69	3,85	3,09			
	40	Q 29454	24844	20253	16784	13620	10922	8353	6264	4628	3342	2358			
		P 12,08	11,48	10,75	9,93	9,05	8,12	7,19	6,26	5,33	4,40	3,57			
FX14/1366	30	Q 13423	11418	9621	8020	6606	5366	4290	3366	2584	1933	1402	979		
		P 2,21	2,19	2,13	2,05	1,94	1,80	1,65	1,48	1,31	1,12	0,94	0,75		
	40	Q 11561	9785	8201	6797	5562	4485	3555	2761	2092	1537	1085	724		
		P 2,65	2,56	2,44	2,30	2,13	1,95	1,76	1,55	1,34	1,12	0,91	0,70		