

## Carlyle / Carrier 06NA2300S5NA

### Specifications


Marka	Carlyle / Carrier
Typ	06NA2300S5NA
Czynnik chłodzący	Freon
kW at -10°C/+40°C	288,6*
Uwagi	*Capacity is approx
Stock	1



### Description

#### Used Carlyle / Carrier 06NA2300S5NA

Used, well maintained 06NA2300s5NA screw compressors, made by Carlyle / Carrier. Electro engine for 3~ fase / 50hz. Refrigerant Freon. \*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.

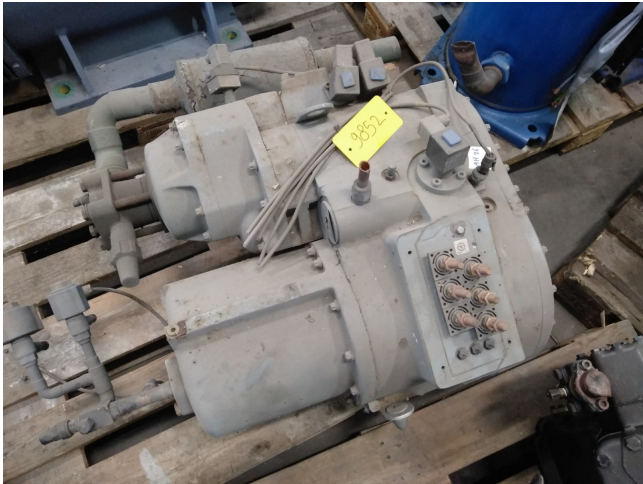

## Compressors

Reference	Size	1 nom.	MIHA	LRA	LRA (V)	LRA (S) 1 cp.	LRA (S) 2 cp.
06NA2146STN	39	70	95	605	191	220	-
06NA2174STN	46	90	120	715	226	260	-
06NA2209STN	56	113	145	856	270	330	420
06NA2255STN	66	130	175	960	303	380	500
06NA2300S5N	80	156	210	1226	387	445	550
06NA2300S5E	80+	174	240	1265	400	460	600

### Legend:

- 06NA - Compressor for air-cooled units
- N - Non-economized compressor
- E - Economized compressor
- INCOM - Average current draw of the compressor at Eurovent conditions
- MIHA - Must hold amperes (maximum operating current) at 360 V
- LRA - Locked rotor current with across-the-line start
- LRA (V) - Locked rotor current at reduced current (star/delta start-up mode)
- LRA (S) 1 cp. - Start-up with reduced current with electronic starter (start-up duration 3 seconds max.) for one compressor per circuit
- LRA (S) 2 cp. - Start-up with reduced current with electronic starter (start-up duration 3 seconds max.) for two compressors per circuit