

Bitzer OSKA5361-K

Specifications


Marka	Bitzer
Typ	OSKA5361-K
Czynnik chłodzący	NH 3 (ammonia)
kW at +10°C/+40°C	153.2
kW at 0°C/+40°C	106.0
kW at -5°C/+40°C	86.8
kW at -10°C/+40°C	70.2
Uwagi	as good as new
Stock	1



Description

Used Bitzer OSKA5361-K

Used, well maintained Bitzer OSKA5361-K screw Ammonia NH₃ refrigeration . Our capacity table is based on the used type of Freon. You can also use these compressors on alternative types of Freon. For all the other specs (if available), see the picture of the manufacturer model plate or the attached pdf file. *Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. *Optional we can also perform a new paint job and arrange the logistics.

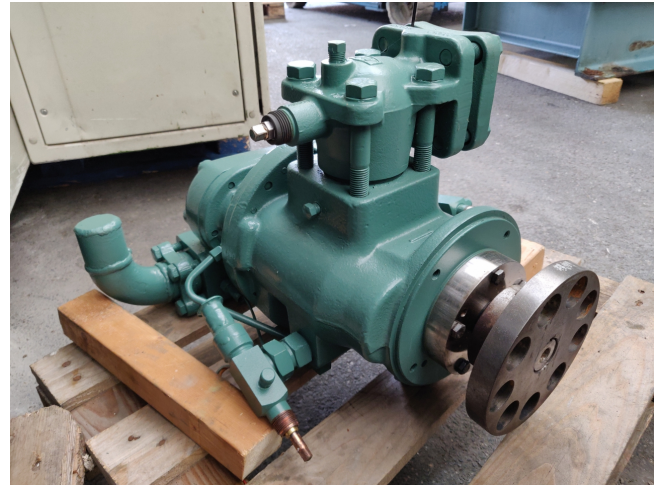



bezogen auf 5 K Sauggasüberhitzung,
ohne Flüssigkeitsunterkühlung.
Motor-Drehzahl 2300 min⁻¹ (50 Hz)

based on 5 K suction superheat,
without liquid subcooling, motor speed
2300 min⁻¹ (50 Hz)

se référant à surchauffe à l'aspiration de 5 K,
sans sous-refroidissement de liquide,
vitesse du moteur 2300 min⁻¹ (50 Hz)

Klima-/Normalbereich		High-/Medium temperature range										Climatisation/Moyennes températures																			
Verdichter Typ	Verf. Temp.	Kälteleistung Cooling capacity Puissance frigorifique										Leistungsaufnahme (Welle) Power consumption (shaft) Puissance absorbée (arbre)																			
Type de compresseur	Temp. de cond. °C	Verdampfungstemperatur °C										Saturated suction temperature °C										Température d'évaporation °C									
		12,5	10	7,5	5	0	-5	-10	-15	-20		12,5	10	7,5	5	0	-5	-10	-15	-20											
OSKA341-K	30	12600	11500	10400	9500	8700	8000	6400	5400	4300	3400	19,18	22,20	21,40	20,70	19,34	18,06	16,84	15,98	15,03	12,98										
	40	11800	10600	9700	9100	8400	7800	6400	5400	4300	3000	20,00	23,20	22,50	21,80	20,30	19,00	17,70	16,80	15,90	14,35										
	50	10600	9700	8700	8000	7400	6900	5800	4800	3800	2800	20,80	23,20	22,50	21,80	20,30	19,00	17,70	16,80	15,90	14,35										
OSKA351-K	30	15000	13800	12600	11500	10500	9600	7900	6400	4800	4000	22,80	22,10	21,30	20,60	19,21	17,90	16,65	15,47	14,35											
	40	13800	12600	11500	10500	9600	8900	7500	6000	4500	3500	23,20	24,40	23,60	22,90	21,40	20,00	18,60	17,30	16,15											
	50	12600	11500	10500	9600	8900	8300	7000	5500	4200	3200	23,60	24,80	24,00	23,30	21,70	20,20	18,80	17,50	16,35											
OSKA361-K	30	17000	15800	14600	13500	12500	11600	9700	7000	5100	4100	24,80	24,00	23,20	22,50	20,90	19,50	18,10	16,80	15,60											
	40	15800	14600	13500	12500	11600	10800	9000	6300	4800	3800	25,20	26,40	25,60	24,90	23,20	21,80	20,40	19,10	17,90											
	50	14600	13500	12500	11600	10800	10100	8400	5800	4400	3400	25,60	26,80	26,00	25,30	23,50	22,10	20,70	19,40	18,20											
Tiefkühlbereich Economiser-Betrieb		Low temperature range Economiser operation										Congélation Fonctionnement avec économiseur																			
Verdichter	Verf.	Kälteleistung										Leistungsaufnahme (Welle)																			



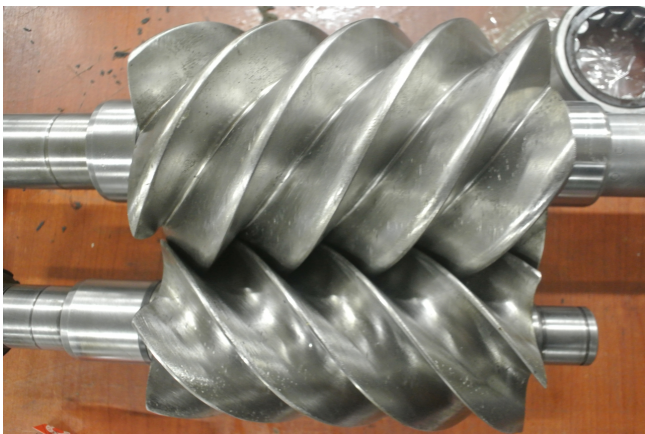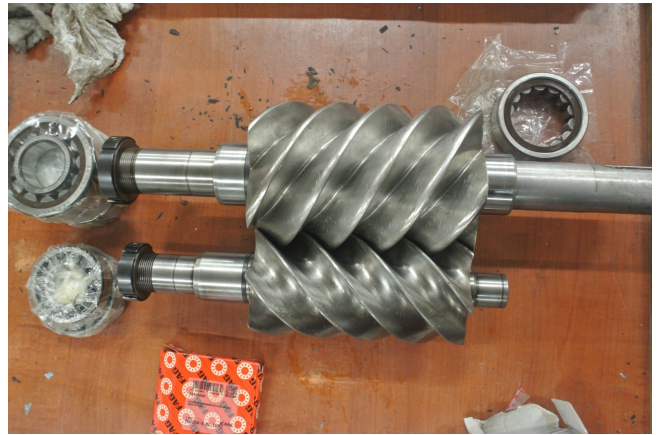



Your partner for used commercial and
industrial refrigeration equipment
