

Bitzer 2FSL-4K-40S (x2) freeze unit

Specifications


Marka	Bitzer
Typ	2FSL-4K-40S (x2) freeze unit
Czynnik chłodzący	CO2
kW at -30°C/+40°C	29.2 based on -10°C/-30°C
kW at -40°C/+40°C	22 based on -20°C/-40°C
Podstawa na stalowej ramie	✓
Wskaźniki ciśnienia	✓
Separator oleju	✓
Poziom oleju w systemie	✓
Osuszający filter lini cieczy	✓
Package / Rack	✓
Stock	1




Description

Used Bitzer 2FSL-4K-40S (x2) freeze unit

Used but in very good condition Bitzer 2FSL-4K-40S (x2) freeze unit with pressure gauges, oil separator and oil reservoir. For all the other specs, see the picture of the manufacturer model plate or the attached pdf file (if available). *Why choose for HOSBV? We're not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. *Optional we can also perform a new paint job and arrange the logistics.

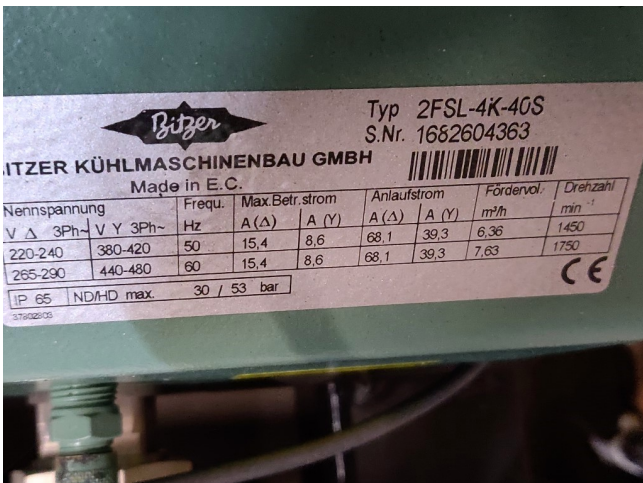

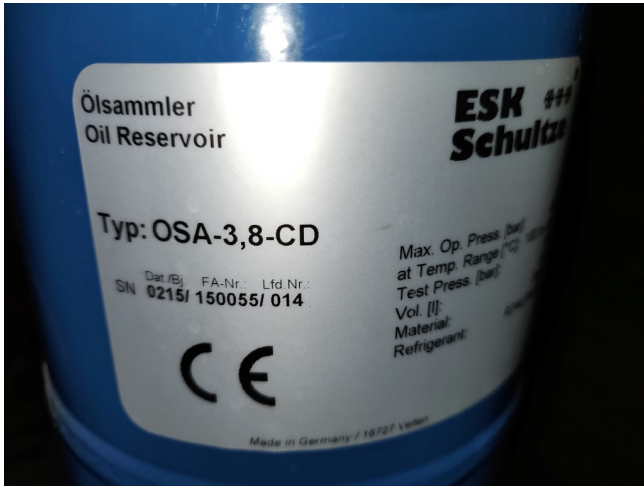

Verdampfer Typ Compressor type Type de compresseur	Verdampfungstemp. Condensation temperature Température de condensation [°C]	Kälteleistung Cooling capacity Puissance frigorifique			Leistungsaufnahme Power consumption Puissance absorbée					
		Q ₀ [Watt]	P _e [kW]							
	Verdampfungstemp. °C	Evaporation temperature °C		Temérature d'évaporation °C						
	-25	-30	-35	-40	-25	-30	-35	-40	-45	-50
2MSL-05K	-20	2480	1930	1480	1130					
	-10	3380	2700	2110	1620	1240	945	0,53	0,58	0,60
	-5	3120	2470	1920	1470	1120	885	0,63	0,68	0,65
	5	2590	2030	1560	1200	950	765	0,81	0,81	0,78
2MSL-07K	-20	3440	2650	1990	1460					
	-10	4520	3600	2810	2140	1590	1140	0,55	0,62	0,64
	-5	4110	3270	2540	1920	1400	985	0,68	0,71	0,71
	5	3380	2650	2020	1490			0,89	0,87	0,82
2KSL-1K	-20	3040	2370	1780						
	-10	4020	3200	2410	1810	1340	960	0,61	0,61	0,58
	-5	3700	2900	2140	1590	1140	815	0,71	0,71	0,67
	5	3040	2370	1780				0,99	0,95	0,88
2JSL-2K	-20	5680	4420	3350	2480					
	-10	7420	5980	4600	3810	2700	1910	0,90	1,01	1,05
	-5	6790	5420	4240	3240	2400	1720	1,11	1,17	1,17
	5	5600	4430	3410	2540			1,49	1,46	1,39
2HSL-3K	-20	5940	3950	3010						
	-10	7920	6160	4760	3590	2640	1910	1,18	1,29	1,35
	-5	6920	5280	4060	3020	2200	1630	1,43	1,51	1,52
	5	5940	3950	3010				1,93	1,90	1,82
2GSL-3K	-20	6960	5180	3970						
	-10	9160	7250	5750	4410	3300				
	-5	8250	6400	4860	3700	2840	2040	1,18	1,29	1,35
	5	6960	5180	3970				2,16	2,09	1,96
2FSL-4K	-20	10960	8220	6730	5140					
	-10	14210	11560	9200	7270	5560	4180	1,68	1,87	1,96
	-5	13110	10620	8460	6600	5020	3710	2,07	2,20	2,23
	5	10920	8760	6980	5270			2,84	2,84	2,75
2FSL-4K	-20	13700	10410	8700	6740					
	-10	17940	14920	11860	9410	7320	5570	2,10	2,34	2,47
	-5	16520	13260	10860	8560	6610	4960	2,81	2,78	2,85
	5	13900	11220	8910	6910			3,63	3,66	3,58
-20	12530	10390	7950				4,13	4,07	3,91	