

Bitzer 4N-20.2 cool/freeze tank generator.

Specifications


Marka	Bitzer
Typ	4N-20.2 cool/freeze tank generator.
Czynnik chłodzący	Freon
Refrigerant type	R 404 A or other types
kW at 0°C/+40°C	45.8
kW at -5°C/+40°C	38.0
kW at -10°C/+40°C	31.2
kW at -20°C/+40°C	20.3
kW at -30°C/+40°C	12.3
Rozładunek	✓
Kontrolka wydajności	✓
Obiornik cieczy	✓
Stock	1




Description

Used Bitzer 4N-20.2 cool/freeze tank generator.

Used but still in good condition, Bitzer 4N-20.2 cool/freeze tank generator. Our capacity table is based on the used type of Freon. You can also use these compressors on alternative types of Freon. For all the other specs (if available), see the picture of the manufacturer model plate or the attached pdf file. *Why choose for HOSBV? We're not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. *Optional we can arrange the logistics.

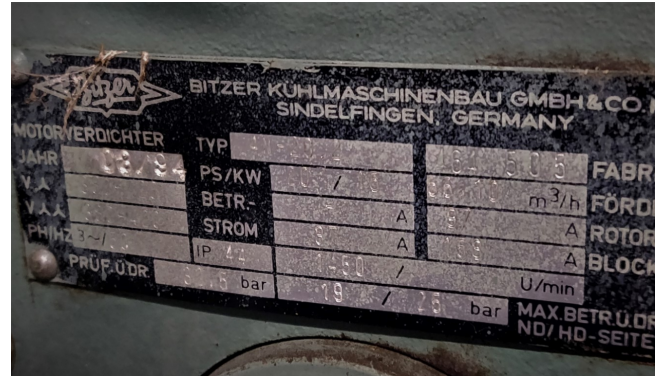

		BITZER Software v6.10.2 rev2250		08.10.2019 / All data subject to change.	1 / 4
---	--	---------------------------------	--	--	-------

Selection: Semi-hermetic Reciprocating Compressors

Input Values

Compressor model	(4N/20.2V)	Suction gas temperature	20.00 °C
Mode	Refrigeration and Air conditioning	Operating mode	Auto
Refrigerant	R404A	Power supply	400V-3-50Hz
Reference temperature	Dew point temp.	Capacity control	100%
Liq. subc. (in condenser)	0 K	Useful superheat	100%

Result

Q [W]	Cooling capacity	COP [-]	COP/EEER
Q _{ev} [W]	Evaporator capacity	m [kg/h]	Mass flow
P [kW]	Power input	Op.	Operating mode
I [A]	Current	th [°C]	Discharge gas temp. w/o cooling
Q _c [W]	Condenser Capacity (w. HK)		

to	5°C	8°C	-5°C	-16°C	-16°C	-26°C	-26°C	-38°C
30°C								
Q [W]	63606	53277	44316	36552	29842	24067	19121	14913
Q _{ev} [W]	63606	53277	44316	36552	29842	24067	19121	14913
P [kW]	12.20	11.68	11.13	10.53	9.86	9.12	8.29	7.36
I [A]	21.5	20.8	19.99	19.19	18.33	17.41	16.42	15.38
Q _c [W]	75200	64375	54888	46551	39211	32733	27000	21903
COP [-]	5.21	4.56	3.98	3.47	3.03	2.64	2.31	2.03
m [kg/h]	1640	1354	1113	909	736	589	466	361
Op.	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
th [°C]	57.0	62.6	68.6	75.1	82.2	90.1	98.6	107.7
40°C								
Q [W]	54802	45848	38056	31285	25434	20390	16071	12398
Q _{ev} [W]	54802	45848	38056	31285	25434	20390	16071	12398
P [kW]	14.11	13.42	12.66	11.81	10.89	9.91	8.87	7.77
I [A]	24.2	23.2	22.1	20.9	19.68	18.39	17.10	15.83
Q _c [W]	68207	58601	50079	42509	35783	29806	24496	19781
COP [-]	3.88	3.42	3.01	2.65	2.33	2.06	1.81	1.60
m [kg/h]	1597	1315	1077	876	705	561	439	337
Op.	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
th [°C]	66.7	72.6	78.9	85.6	92.9	100.9	109.6	119.6
50°C								
Q [W]	44845	37506	31089	25496	20645	16459	12871	9820
Q _{ev} [W]	44845	37506	31089	25496	20645	16459	12871	9820
P [kW]	16.05	15.21	14.24	13.16	11.98	10.73	9.42	8.09
I [A]	27.2	25.9	24.4	22.8	21.2	19.46	17.78	16.19
Q _c [W]	60094	51959	44618	37995	32024	26650	21824	17503
COP [-]	2.79	2.47	2.18	1.94	1.72	1.53	1.37	1.21
m [kg/h]	1521	1249	1020	825	661	522	405	307
Op.	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
th [°C]	77.8	84.1	90.8	97.9	105.6	114.0	123.1	133.3

~ No calculation possible (see message in single point selection)
 *According to EN12900 (20 °C suction gas temp., 0K liquid subcooling)

Application Limits 100% 4N-20.2

--

1 enand