

Helpman LFX 256-7

Specifications



Marka	Helpman
Typ	LFX 256-7
Ogólna wydajność w kW	19.9
Czynnik chłodzący	Freon
Liczba wentylatorów	5
Średnica wentylatora mm	7
Rozmrażanie	Electric
Przepływ powietrza w m ³ /h	14.000
Rozmiary	3420x540 mm (LxH)
Uwagi	19.9 at DT1=8K // YOB 2011
Volume	26 dm ³
Waga	174
Stock	1



Description

Used Helpman LFX 256-7

Used helpman LFX 256-7 · Size: 3420x540 mm (LxH) · Weight: 174Kg · Fin space: 7mm · m³/h: 14.000 · Fans: 5 · Hertz fans: 50Hz · refrigerant R404A electric defrost · **All components of this used evaporator will be tested on good working, leak free condition (electro engines), coils, bearings) Choosing HOSBV means buying with warranty. We perform a industrial cleaning and rust spots will be covered. Also, we can arrange your shipment.

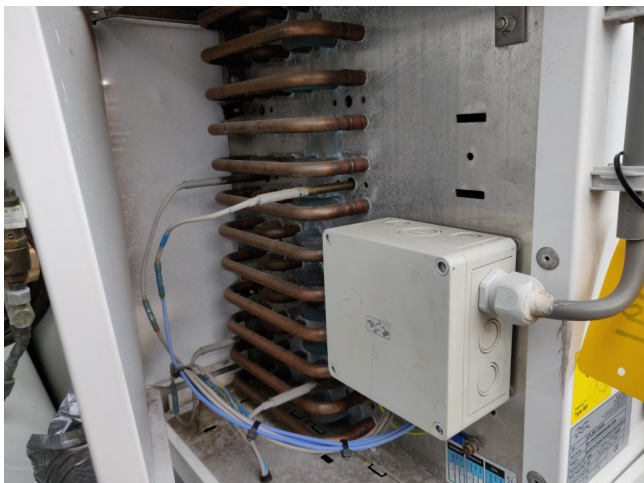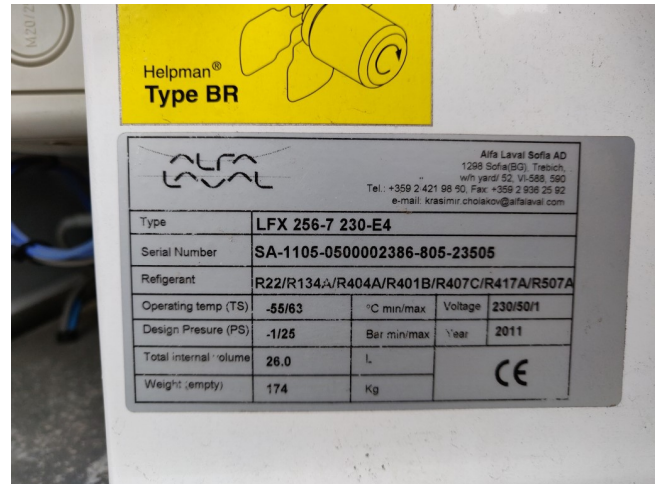

Agricultural storage coolers

THOR-F, TYR-F, LFX

Capacities R-404A

Cooler model	Capacities kW			Air flow m³/h	Coil surface m²	Int. vol. dm³	Weight kg	Dimensions		Fans			
	Frosted L ₀ -8°C DT=4K	Dry cond. L ₀ -8°C DT=4K	Dry cond. L ₀ -8°C DT=4K					Length A mm	Height B mm	Cap. kW	Nr	Air throw (m)	Sound press. dBA
LFX													
LFX 136-7	6.8	5.9	5100	30.3	10	54	1600	450	90	3	12	54	
LFX 146-7	9.6	8.3	6800	40.4	13	70	2040	450	90	4	12	56	
LFX 156-7	11.8	10.1	8500	52.6	16	86	2560	450	90	5	12	57	
LFX 166-7	14.3	12.4	10200	60.4	19	103	2900	450	90	6	12	58	
LFX 246-7	14.7	12.8	11200	63.1	23	135	2660	540	90	4	15	59	
LFX 256-7	19.8	17.3	14000	84.1	26	174	3420	540	90	5	15	60	
LFX 266-7	22.2	19.3	16800	90.4	29	193	3640	540	90	6	15	61	
LFX 276-7	25.9	22.5	19600	105.6	34	219	4190	540	90	7	15	61	
LFX 286-7	28.6	24.9	22400	120.7	39	250	4740	540	90	8	15	62	
THOR-F													
THOR-F 136-7	20.7	18.0	12840	101.4	32	159	2920	580	250	3	20	62	
THOR-F 146-7	27.1	23.5	17130	135.2	42	203	3720	580	250	4	20	63	
THOR-F 156-7	34.4	30.0	21410	169.0	53	246	4520	580	250	5	20	64	
THOR-F 166-7	41.3	35.9	25690	202.8	63	290	5320	580	250	6	20	65	
THOR-F 176-7	47.6	41.4	29970	236.6	74	333	6120	580	250	7	20	66	
THOR-F 236-7	24.8	21.6	15410	121.7	42	176	2920	680	250	3	24	65	
THOR-F 246-7	32.5	28.2	20550	162.2	53	225	3720	680	250	4	24	66	
THOR-F 256-7	41.3	35.9	25690	202.8	65	274	4520	680	250	5	24	67	
THOR-F 266-7	49.6	43.1	30830	243.4	76	323	5320	680	250	6	24	68	
THOR-F 276-7	57.1	49.7	35970	283.9	88	372	6120	680	250	7	24	69	
TYR-F													
TYR-F 136-7	18.5	16.0	12840	101.4	32	159	2920	580	250	3	20	62	
TYR-F 146-7	24.6	21.4	17130	135.2	42	203	3720	580	250	4	20	63	
TYR-F 156-7	30.8	26.7	21410	169.0	53	246	4520	580	250	5	20	64	
TYR-F 166-7	36.9	32.1	25690	202.8	63	290	5320	580	250	6	20	65	
TYR-F 176-7	43.1	37.4	29970	236.6	74	333	6120	580	250	7	20	66	