

## York / Frick JS64 P

### Specifications


Marka	York / Frick
Typ	JS64 P
Czynnik chłodzący	Freon
Stock	1



### Description

#### Used York / Frick JS64 P

Used Jci - York / Frick hermetic compressor model JS64 P For all the other specs (if available), see the picture of the manufacturer model plate or the attached pdf file. \*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. \*Optional we can also perform a new paint job and arrange the logistics.

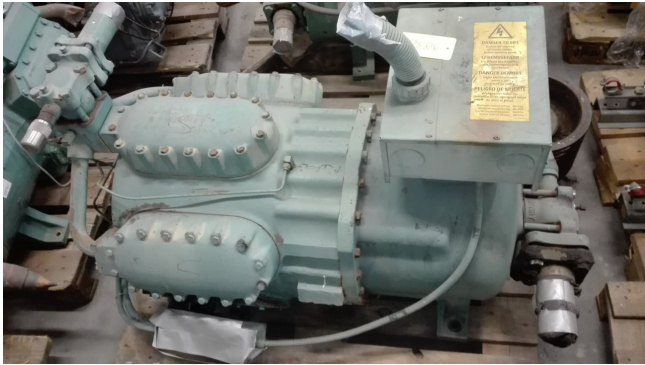

\* Styles A through D oil pressure should be 25 - 40 PSI above Suction. Style E, F, & JG should have a minimum of 60 PSI.

\* Styles A through D, 5 through 8 cylinder, 3-1/2 gallon oil charge. Styles E, F, & JG, 3 Gallons, all compressors.

MODEL	JS/JG	44	54	64	74	84
NET OIL PRESSURE		60*	60*	60*	60*	60*
CYLINDERS		4	5	6	7	8
BORE		3-3/4	3-3/4	3-3/4	3-3/4	3-3/4
STROKE		3.8	3.6	3.6	3.7	3.7
DISPLACEMENT CFM		170.0	201.3	241.6	289.7	331.1
OIL GRADE		300	300	300	300	300
OIL CHARGE GALS.		3	3*	3*	3*	3*
NET WEIGHT		1370	1480	1480	1640	1640
RATED TONS	R-12	X	X	X	X	X
	R-22	X	X	X	X	X