

Goedhart VCB 63507

Specifications



Marka	Goedhart
Typ	VCB 63507
Ogólna wydajność w kW	31,5
Czynnik chłodzący	Freon
Liczba wentylatorów	3
Średnica wentylatora mm	7
Rozmrażanie	Hot Gas
Przepływ powietrza w m ³ /h	21197
Rozmiary	3450x1010x670 mm
Uwagi	Diameter fan 50 cm
Remarks	Surface 171 m ²
Volume	43,0 dm ³
Waga	288 kg
Stock	3



Description

Used Goedhart VCB 63507

Used Goedhart VCB 63507 evaporator with three Woods fans 50 Hz 220/240V diameter: 500 mm. Hot gas defrosting. *All components of this used evaporator will be tested on good working, leak free condition (electro engines), coils, bearings) Choosing HOSBV means buying with warranty. We perform a industrial cleaning and rust spots will be covered. Also, we can arrange your shipment.

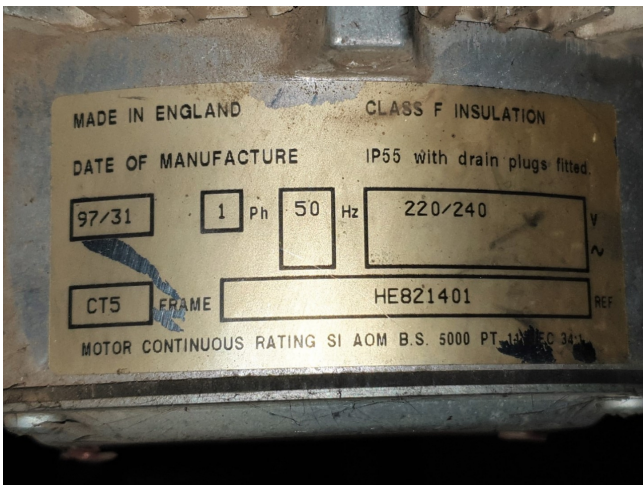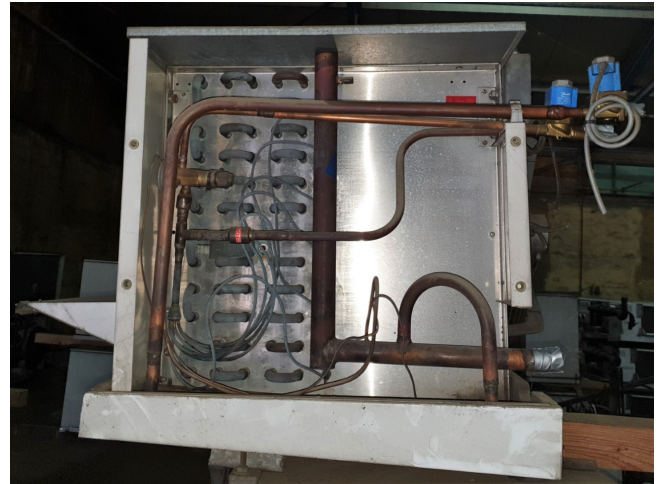

VCI 7mm Technical data

1500V 50Hz 4pole (1500 min* mm3)											Dimensions										Connections				
D400A																					Refrigerant				
Type VCI	DT1 - 100°C (100/100)	DT2 - 80°C (80/80)	DT3 - 60°C (60/60)	DT4 - 40°C (40/40)	DT5 - 20°C (20/20)	DT6 - 0°C (0/0)	DT7 - -20°C (-20/-20)	DT8 - -40°C (-40/-40)	DT9 - -60°C (-60/-60)	DT10 - -80°C (-80/-80)	Internal volume	Weight	L	B	H	D	E1	E2	E3	D1	D2	In	Out	Hot gas	Air flow**
	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	m³	kg	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	m³
4.1.40.7	4.0	2.8	2.430	52	22	6	76	1156	670	620	500	756	578	15	15	19	20								
4.1.40.7	5.1	3.8	3283	52	33	9	80	1156	770	620	600	756	578	12	15	19	20								
4.1.40.7	6.3	4.5	3147	52	44	11	96	1156	870	620	700	756	578	12	22	19	20								
4.1.40.7	5.5	4.1	5206	56	30	8	83	1256	670	720	500	856	638	12	22	19	20								
4.1.40.7	7.7	5.4	4968	56	45	12	97	1256	770	720	600	856	638	12	22	19	20								
4.1.40.7	9.2	6.6	4754	56	61	16	116	1256	870	720	700	856	638	12	22	19	20								
4.1.50.7	7.8	5.5	7387	63	38	10	115	1456	750	720	600	1056	728	12	22	19	25								
4.1.50.7	10.4	7.5	7073	63	57	15	122	1456	850	720	700	1056	728	12	22	19	25								
4.1.50.7	12.4	8.9	6786	63	76	19	142	1456	950	720	800	1056	728	12	28	19	25								
4.1.50.7	10.1	7.6	10553	63	56	14	160	1556	910	820	700	1156	778	12	22	19	27.5								
4.1.50.7	15.1	10.6	10195	63	84	21	166	1556	1010	820	800	1156	778	12	28	19	27.5								
4.1.50.7	16.7	11.5	9864	63	112	28	193	1556	1110	820	900	1156	778	16	28	19	27.5								
4.1.50.7	14.7	10.8	13095	63	76	19	208	1656	910	1020	700	1256	828	12	28	19	27.5								
4.1.50.7	19.6	14.1	12734	63	114	20	205	1656	1010	1120	800	1256	828	16	35	19	27.5								
4.1.50.7	23.8	16.9	12384	63	152	38	243	1656	1110	1200	900	1256	828	16	35	19	27.5								
4.2.40.7	8.0	5.6	6853	44	33	8	123	1856	670	620	500	1456	928	12	22	19	20								
4.2.40.7	10.7	7.6	6563	45	35	66	17	130	1856	770	620	600	1456	928	12	22	19	20							
4.2.40.7	12.7	9.0	6285	45	59	89	22	156	1856	870	620	700	1456	928	12	28	19	20							
4.2.40.7	11.7	8.2	10405	59	60	15	151	2056	670	720	500	1656	1028	12	28	19	22.5								
4.2.40.7	15.3	10.7	9920	59	91	23	160	2056	770	720	600	1656	1028	12	28	19	22.5								
4.2.40.7	16.3	13.2	9495	59	121	30	192	2056	870	720	700	1656	1028	16	28	19	22.5								
4.2.50.7	15.6	11.0	14765	66	76	19	151	2456	750	720	600	2056	1228	16	28	19	25								
4.2.50.7	20.8	14.9	14135	66	114	29	205	2456	850	720	700	2056	1228	16	35	19	25								
4.2.50.7	24.7	17.8	13560	66	152	38	242	2456	950	720	800	2056	1228	16	35	19	25								
4.2.50.7	20.4	15.2	21096	66	111	28	247	2456	1010	820	700	2256	1328	16	35	19	27.5								
4.2.50.7	30.3	21.2	20378	66	167	42	282	2456	1110	820	800	2256	1328	16	42	19	27.5								
4.2.50.7	34.2	22.8	19714	66	223	55	333	2456	1110	900	900	2256	1328	16	42	19	27.5								
4.2.50.7	29.5	20.9	26184	66	152	38	342	2456	1110	1120	700	2456	1428	16	42	19	27.5								
4.2.50.7	39.3	28.2	25497	66	238	57	357	2456	1010	1120	800	2456	1428	22	42	19	27.5								
4.2.50.7	46.5	33.8	24754	66	304	75	424	2456	1110	1120	900	2456	1428	22	42	19	27.5								
4.3.40.7	17.4	12.2	19604	61	91	22	210	2856	670	720	500	2456	1428	16	28	19	22.5								
4.3.40.7	23.3	16.6	14883	61	137	34	225	2856	770	720	600	2456	1428	16	35	19	22.5								
4.3.40.7	27.5	19.4	14236	61	182	45	270	2856	870	720	700	2456	1428	16	35	19	22.5								
4.3.50.7	21.7	15.5	22144	67	114	29	268	3456	750	720	600	1028	2028	864	1728	16	35	19	25						
4.3.50.7	31.5	22.8	21197	67	171	43	288	3456	850	720	700	1028	2028	864	1728	16	42	19	25						
4.3.50.7	37.0	26.7	20333	67	238	57	342	3456	950	720	800	1028	2028	864	1728	16	42	19	25						
4.3.50.7	34.3	23.2	21642	67	167	42	384	3456	1010	820	700	1128	2228	939	1878	16	42	19	27.5						