

Alfa Laval BCD E905BD P SW CBP

Specifications

Marka	Alfa Laval
Typ	BCD E905BD P SW CBP
Typ produktu	Air Cooled Condenser
Ogólna wydajność w kW	598,8
Liczba wentylatorów	10
Prdkość obrotów wentylatora (obr/min)	570
Czynnik chłodzący	Freon
Przepływ powietrza w m ³ /h	169.200
wentylatory o średnicy Ø 910 mm	
Powierzchnia (m2)	2.286
Objętość rurki	200,5 dm ³
Rozmiary	9230x2300x1400 mm
Waga	1.662 kg
Uwagi	y.o.b. 2016
Stock	1






Description

Used Alfa Laval BCD E905BD P SW CBP

Used and in very good condition Alfa Laval BCD E905BD P SW CBP air cooled condensor. Complete with 10 fans from Ziehl-Abegg designed for 60°C, 50/60 Hz - 0,68 kW - 570 RPM - diameter Ø 910 mm. Capacity at delta 598,8 kW and 169.200 m³/h. Capacity at Y 519,5 kW and 135.400 m³/h.

*All components of this used condensers will be tested on good working, leak free condition (electro engines), condensing block, bearings. Choosing HOSBV means buying with warranty. We perform a industrial cleaning. Also, we can arrange your shipment.

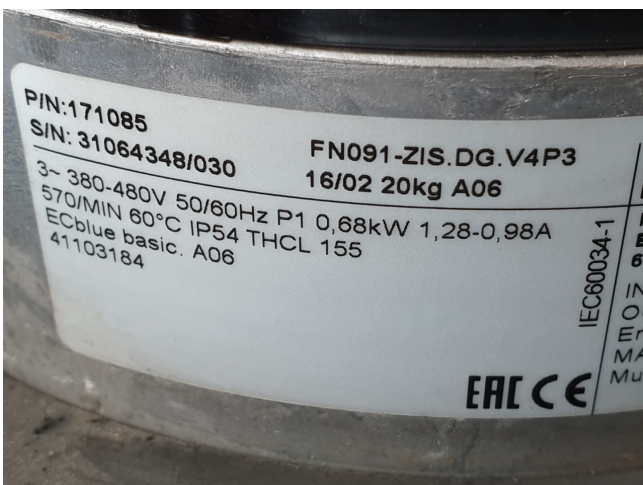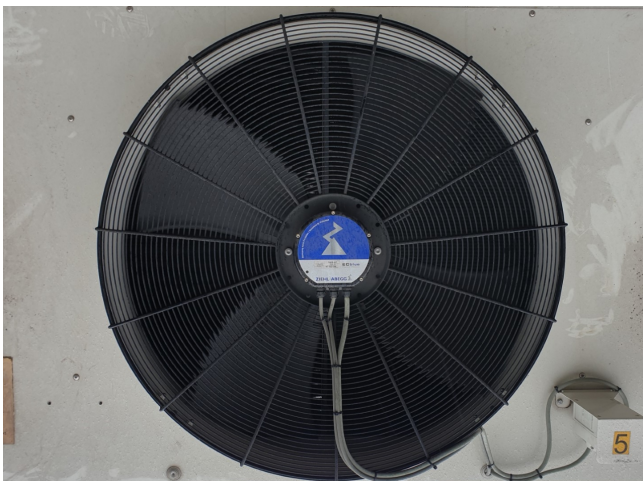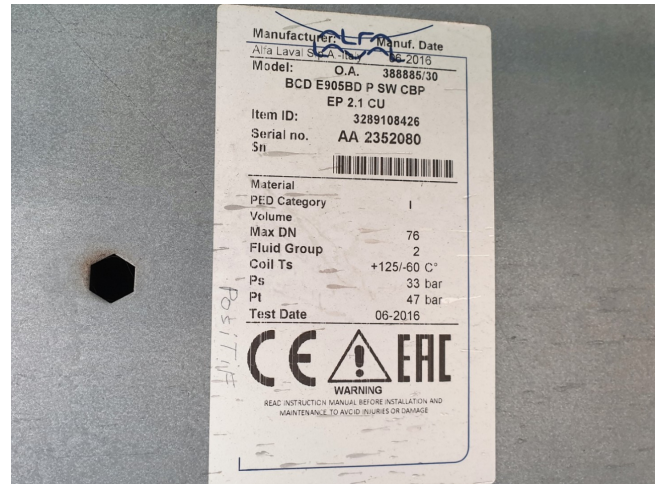



Type	Cap. R404A ΔT = 15K kW(1) A	Cap. R404A ΔT = 15K kW(1) Y	IP dB(A) 10m (2) A	IP dB(A) 10m (2) Y	Luchtdebiet m³/h A	Luchtdebiet m³/h Y	Vent. maat, x Ø mm	Opp. m²	Afmetingen (3) L x B x H mm	Inhoud dm³	Gewicht kg
660/660 tr/min. - 6P/8P ventilatoren											
BCMS 902 B	190,4	149	53	47	44280	34700	2 x 910	348,4	4655 x 900 x 1495	51	481
BCMS 902 C	192,3	154,7	53	47	42580	33020	2 x 910	464,6	4655 x 900 x 1495	68	519
BCMS 903 B	250,5	222,9	55	49	66370	52000	3 x 910	520,6	6755 x 900 x 1495	76,3	693
BCMS 903 C	282,8	229,1	55	49	63800	49470	3 x 910	694,1	6755 x 900 x 1495	101,7	751
BCMS 904 B	330,2	282,3	56	50	92450	73270	4 x 910	1177,2	8855 x 900 x 1495	103,2	963
860/660 tr/min. - 6P/8P ventilatoren - ventilatoren parallel											
BCDS 902 B	292,4	251,4	55	49	88740	69580	4 x 910	936,0	4655 x 900 x 2290	80,8	738
BCDS 903 B	443,3	377,8	57	51	133000	104300	6 x 910	1390,0	6755 x 900 x 2290	120,7	1065
BCDS 904 B	584,7	502,3	58	52	177300	138900	8 x 910	1851,0	8855 x 900 x 2290	160,6	1408
BCDS 905 B	696,0	606,1	59	53	221500	173600	10 x 910	2324,0	10555 x 900 x 2290	200,5	1742
640/440 tr/min. - 8P/12P ventilatoren											
BCML 901 B	73,26	60,84	44	39	16950	13570	1 x 910	176,3	2555 x 900 x 1495	25,8	258
BCML 902 B	146,0	121,4	47	42	33820	27060	2 x 910	348,4	4655 x 900 x 1495	51	465
BCML 902 C	152,6	123,5	47	42	32510	25630	2 x 910	464,6	4655 x 900 x 1495	68	503
BCML 903 B	218,4	181,8	49	44	50690	40540	3 x 910	520,6	6755 x 900 x 1495	76,3	669
BCML 903 C	226,1	183,7	49	44	48710	38400	3 x 910	694,1	6755 x 900 x 1495	101,7	727
BCML 904 B	274,9	236,7	50	45	70540	57490	4 x 910	1177,2	8855 x 900 x 1495	103,2	931
640/440 tr/min. - 8P/12P ventilatoren - ventilatoren parallel											
BCDL 902 B	247,1	212,2	49	44	67780	54270	4 x 910	921,0	4655 x 900 x 2290	80,8	706
BCDL 903 B	371,2	317,1	51	46	101600	81310	6 x 910	1376,0	6755 x 900 x 2290	120,7	1017
BCDL 904 B	493,8	423,8	52	47	135400	106400	8 x 910	1831,0	8855 x 900 x 2290	160,6	1344
BCDL 905 B	596,8	519,5	53	48	169200	135400	10 x 910	2286,0	10955 x 900 x 2290	200,5	1662