

Güntner S-GGHN 071.2E/27-ANW50/6P.E

Specifications



Производитель	Güntner
Тип	S-GGHN 071.2E/27-ANW50/6P.E
кВт	49,7
Хладагент	Glycol
К-во вентиляторов	2
Расстояние между ламелями, мм	7
Оттайка	None
Поток воздуха м³/час	24.400
Размеры	3480x730x950 mm (LxWxH)
Примечания	Y.o.b. 2009
Volume	44,7 dm³
вес	279 kg
Stock	4




Description

Used Güntner S-GGHN 071.2E/27-ANW50/6P.E

Used and in good condition Güntner S-GGHN 071.2E/27-ANW50/6P.E evaporator. Complete with 2 Zielh-Abegg fans 50 Hz - 0,68/0,31 kW - 900/690 RPM - diameter 710 mm. *All components of this used evaporator will be tested on good working, leak free condition (electro engines), coils, bearings) Choosing HOSBV means buying with warranty. We perform a industrial cleaning and rust spots will be covered. Also, we can arrange your shipment.

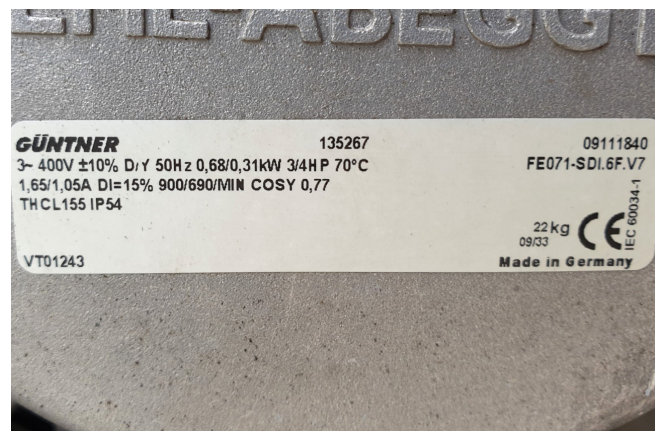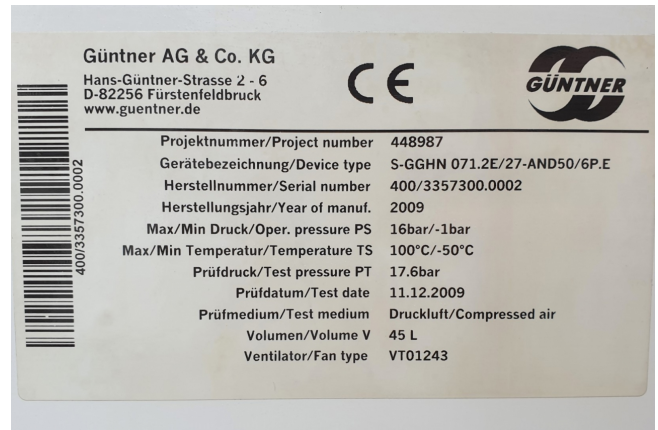

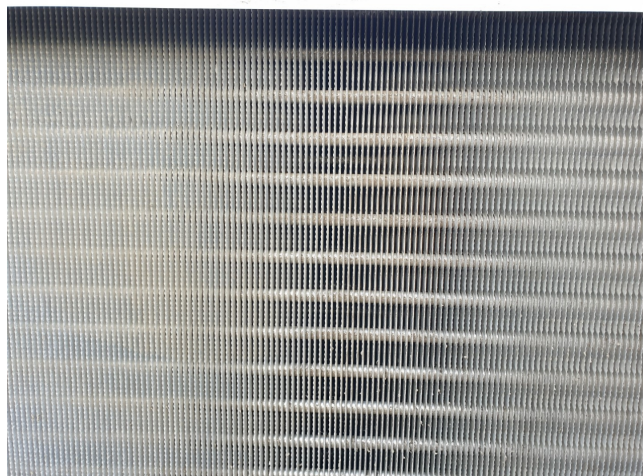

GGHN - 2 Ventilatoren - 2 Fans															
t _a = -3 °C; d _p = 0.8 bar; Øyl 250 mm bei 85% r.F. Øyl 250 mm at 85% relative humidity															
Type	Anschlüsse				Kälteleiter / Sole				Anschlüsse		El. Abfuhrleistung				
Type	Connections				Coolant / Bone				Connections		El. defrost				
Type	Leistung Capacity	Volumenstrom Volume flow	Schallleistung Sound power	Leistung Capacity	Volumenstrom Volume flow	Schallleistung Sound power	Leistung Capacity	Volumenstrom Volume flow	Schallleistung Sound power	Leistung Capacity	Volumenstrom Volume flow	Schallleistung Sound power	Leistung Capacity	Volumenstrom Volume flow	Schallleistung Sound power
040.2D-2F-ANW50	17.4	4.7	3.0	65.4	61.2	12.0	27	55	35.0	35.0	6250	1200	4.95	1 x A 0.3	1 x E
040.2F-2F-ANW50	18.2	2.5	3.7	98.0	56.20	11	26	55	35.0	35.0	6750	1200	7.95	1 x B 0.4	0.4
045.2D-2F-ANW50	23.8	3.8	2.7	102.6	102.20	17	36	59	35.0	35.0	4500	2300	6.80	1 x B 0.9	1 x E
045.2F-2F-ANW50	30.7	3.0	1.9	125.9	95.20	19	39	59	42.0	42.0	4000	2400	8.30	1 x B 1.0	1 x E
050.2D-2F-ANW50	29.6	5.0	2.4	135.4	13300	21	41	59	42.0	42.0	4000	2400	9.40	1 x B 1.0	1 x E
050.2F-2F-ANW50	38.8	6.9	2.1	168.2	12940	21	39	59	54.0	54.0	8750	2400	11.15	1 x B 1.05	1 x E
050.2F-2F-ANW50	43.5	7.9	2.0	181.8	12600	20	37	59	54.0	54.0	10500	3600	14.10	1 x B 1.07	1 x E
071.2D-2F-ANW50	30.7	10.8	3.8	235.9	23500	25	45	59	42.0	42.0	6250	4500	8.00	2 x B 1.2	2 x E
071.2F-2F-ANW50	64.7	10.6	2.6	294.1	22460	35	63	57	54.0	54.0	15000	4500	15.50	2 x C 1.6	2 x E
071.2F-2F-ANW50	73.9	12.5	2.4	352.9	21880	34	61	57	64.0	64.0	15000	4500	22.00	2 x C 1.64	2 x E
080.2D-2F-ANW50	90.1	16.5	2.0	306.0	35940	43	75	66	64.0	64.0	18000	6000	24.00	2 x C 2.69	2 x E
080.2F-2F-ANW50	108.5	10.8	3.8	461.3	31400	41	71	66	88.9	88.9	27000	6000	33.00	2 x C 3.72	2 x E
080.2F-2F-ANW50	123.1	24.7	1.5	553.6	33440	41	71	66	88.9	88.9	27000	6000	33.00	2 x C 3.72	2 x E
040.2F-2F-ANW50	15.7	2.5	6.7	57.0	62.00	13	27	55	35.0	35.0	6250	1700	7.95	1 x B 0.4	0.3
040.2H-2F-ANW50	21.5	4.6	1.2	76.9	5860	12	26	55	42.0	42.0	7500	1700	9.20	1 x B 0.4	0.3
045.2F-2F-ANW50	21.5	2.9	7.5	105.0	5040	13	39	62.0	42.0	42.0	6250	1700	9.20	1 x B 0.4	0.3
045.2F-2F-ANW50	28.0	5.7	1.5	90.6	10380	16	38	59	42.0	42.0	7500	3450	10.95	1 x B 0.9	0.9
045.2H-2F-ANW50	34.9	7.6	1.2	120.8	9680	16	36	59	54.0	54.0	10500	3450	13.95	1 x B 1.01	1.0
050.2F-2F-ANW50	35.1	6.3	2.1	118.7	13400	22	41	59	54.0	54.0	10500	3600	14.10	1 x B 1.0	1.0
050.2H-2F-ANW50	41.9	7.2	2.7	159.3	12940	21	39	54.0	54.0	15750	3600	19.35	1 x B 1.05	1.0	
071.2E-2F-ANW50	49.7	7.9	2.8	173.0	24040	35	65	57	54.0	54.0	15000	4500	15.50	2 x C 1.6	2 x E
071.2F-2F-ANW50	53.1	6.9	3.9	207.6	23780	35	64	57	54.0	54.0	15000	4500	22.00	2 x C 1.59	2 x E
071.2H-2F-ANW50	80.3	17.3	1.2	276.8	22200	43	76	67	76.1	76.1	22500	6000	27.00	2 x C 1.61	2 x E
080.2E-2F-ANW50	80.3	17.3	1.2	276.8	22200	43	76	67	76.1	76.1	22500	6000	27.00	2 x C 1.61	2 x E
080.2H-2F-ANW50	108.5	10.8	3.8	461.3	31400	41	71	66	88.9	88.9	27000	6000	33.00	2 x C 3.72	2 x E