

Stal SRM S73E - 42G

Specifications

Бренд	Stal
Тип	SRM S73E - 42G
Хладагент	NH 3 / Freon
kW at -5°C/+40°C	2200
кВт at -10°C/+40°C	1840
кВт at -20°C/+40°C	1225
кВт at -30°C/+40°C	775
кВт at -40°C/+40°C	475
Электродвигатель	380V - 50Hz - 2960 RPM
Specs	- 400kW
На стальной раме	✓
Манометры	✓
Панель управления	✓
m3 / h	2505 at 2950 RPM / 3010 at 3540 RPM
Масса	1185
Размеры	3300x1510x1610 mm (LxWXH)
Stock	1





Description

Used Stal SRM S73E - 42G

Used STAL SRM S73E - 42G open drive screw compressor for NH3 (single stage version for economizer operation). Unit with electric motor and pressure gauges. The capacities refer to a process with subcooling of the liquid to the intermediate temperature and with no superheating of the suction gas. Furthermore the capacities are based on 2950 rpm, 50 Hz and NH3. The volume ratio is 4,2.

*Why choose for HOSBV? We are not only the largest used refrigeration specialist in Europe, but also, we solely deliver our orders after performing an extensive test and an industrial cleaning. If requested we are happy to arrange your logistics.

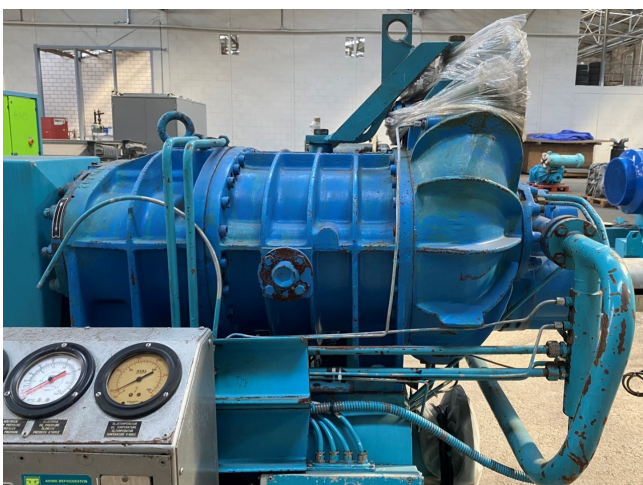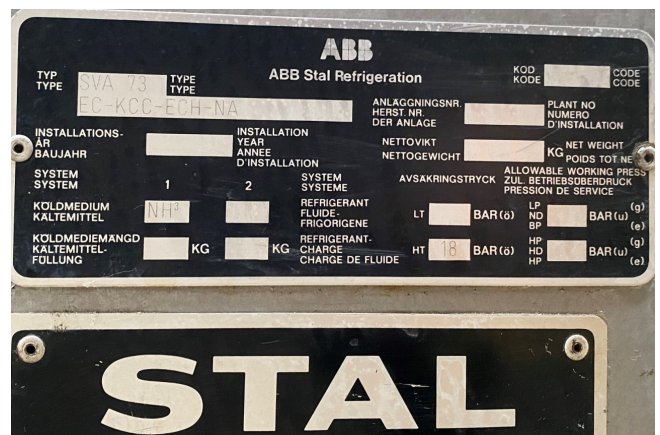



LEROY SOMER MOT. $\sim$ PLS 315L02 B3 CE N° 43140400TC01 kg: 1120	
IP 23 IK D8	I cl. F 40 °C S 1 % d/h
V	Hz min ⁻¹ kW cos φ A
380Δ	50 2960 400 .87 727
400Δ	50 2960 400 .87 695
690Δ	50 2960 400 .87 401
415Δ	60 2960 460 .85 686
440Δ	60 3560 460 .87 727
460Δ	60 3560 460 .87 695
TP111B MJ328096 E980 UNIREX H3	
DE 6317 C3	37 cm ³ 1700/800 H 50/60 Hz
NDE 6317 C3	37 cm ³ 1700/800 H 50/60 Hz

