

Bluebox/Western Zeta REV 3.2 1PS

Specifications


Производитель	Bluebox/Western
Тип	Zeta REV 3.2 1PS
Тип продукта	Air Cooled Chiller
кВт	40,4
Мощность, тонн	11,5
Хладагент	Freon
Тип хладагента	R410A
Liquid buffer tank	✓
Pump	✓
гидромодулем	✓
Масса	416
Sizes	1700x1100x1450 mm (LxWxH)
Compressor(s) type & model	Copeland Scroll ZP91KCE-TFD-422(x2)
Number of fans	2
Fan specifications	0,6 kW - 860 RPM - diameter 630 mm
Примечания	water flow: 3,6-9,6 m³/h
Remarks	Y.o.b. 2017
Stock	1



Description

Used Bluebox/Western Zeta REV 3.2 1PS

Used BlueBox Zeta REV 3.2 1PS air cooled chiller on R410A build in 2017. Complete with 2 Copeland ZP91KCE-TFD-422 scroll compressors, condensor with 2 EBM-Papst A6E630-AN01-01 fans - 50 Hz - 0,60 kW - 860 RPM and a total airflow of 16.000 m³/h, plate heat exchanger as evaporator, liquid buffer tank, Lowara CIE120/4/D water pump, expansion vessel, liquid line filter drier and a control box with a control panel. *All components of this used chiller will be tested on adequate performance, leak free condition (condensing blocks), compressors, fans, control panel, and so forth). Choosing HOSBV means buying with warranty. We perform a industrial cleaning. if requested we can arrange your shipment.

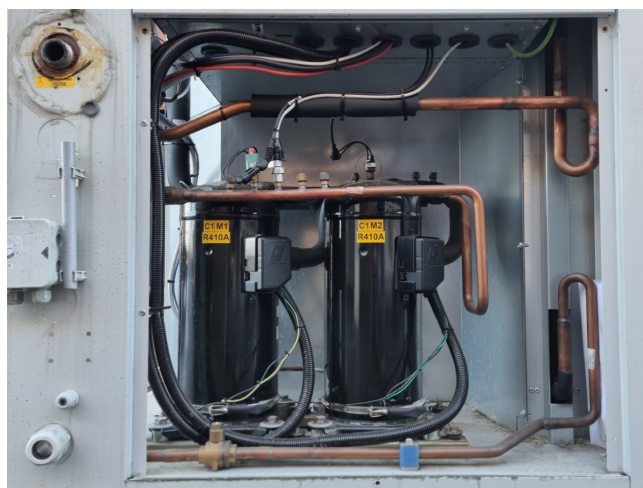

BlueBox
A Swegon Group company
Via Valletta, 3
30010 Cortina d'Ampezzo (VI) Italy
Phone +39 0428 921111 Fax +39 0428 92222

CE
1370

Mod. Zeta REV 3.2 1PS

Tipo refrigerante Type réfrigérant Refrigerant type Kältemitteltyp	IP quadro elettrico IP tableau électrique IP electrical panel IP schaltschrank	Metricola Numéro de série Serial number Seriennummer
.R410A	2088	.IP54
2088	.IP54	SB10018420

Max. Corrente assorbita Max. Courant absorbé Max. Absorbed current Max. Stromaufnahme	Max. Corrente di spunto Max. Courant de démarrage Max. Inrush current Max. Anlaufstrom
.36,5 A	.123,1 A

Tensione-Fasi-Frequenza Tension-Phases-Fréquence Voltage-Phases-Frequency Spannung-Phasen-Frequenz	Tensione circuiti ausiliari Tension circuit auxiliaires Auxiliary circuit voltage Steuerspannung
.400V 3N ~ 50Hz	.230-24V ~ 50Hz

Numero circuiti refrigerante Nombre circuits réfrigérant Refrigerant circuit number Anzahl der Kältekreise	Gruppo Fluido Groupe fluides Fluid Group Fluidgruppe
.1	2

TS temperatura min/max ramo: TS temperature min/max branche: TS temperature min/max branch: TS temperatur min/max zweig:	PS Press. max refrigerante ramo: PS Press. max réfrigérant branche: PS Press. max refrigerant branch: PS Druck max kältemittel zweig:
HP -10 °C/120 °C LP -20 °C/50 °CC	HP 45 bar LP 26 bar

Press. massima circuito idraulico Press. Maxi circuit hydraulique Max. hydraulic circuit pressure Max. zulässiger Druck im Wassersystem	Date di produzione Date de production Date of manufacture Herstellungsdatum
6bar	.09.08.2017

Carica refrigerante per circuito(kg)/Charge réfrigérant par circuit(kg) Refrigerant charge on circuit (kg)/Kältemittel Füllmenge je Kreislauf(kg)	
C1 C2 C3 C4	
0 8,352	

Contiene gas fluorurati ad effetto serra disciplinati dal protocollo di Kyoto/Contient des gaz à effet de serre fluorés relevant du protocole de Kyoto/Contains fluorinated greenhouse gases covered by the Kyoto Protocol/Enthält vom Kyoto-Protokoll erfasste fluorierte Treibhausgase.

Manufactured by VAT IT 02481290282

