


## Bitzer 66H-50.2 Y / 6H-25.2 Y (x2)

### Specifications

|                    |                                |
|--------------------|--------------------------------|
| Бренд              | Bitzer                         |
| Тип                | 66H-50.2 Y / 6H-25.2 Y<br>(x2) |
| Хладагент          | Freon                          |
| kW at -5°C/+40°C   | 149,3                          |
| кВт at -10°C/+40°C | 123,1                          |
| кВт at -20°C/+40°C | 80,7                           |
| кВт at -30°C/+40°C | 49,4                           |
| кВт at -40°C/+40°C | 26,9                           |
| kW at -45°C/+40°C  | 18,3                           |
| Разгруженный старт | ✓                              |
| На стальной раме   | ✓                              |
| Прессостаты        | ✓                              |
| Смотровое стекло   | ✓                              |
| m <sup>3</sup> / h | 221                            |
| Масса              | 483                            |
| Размеры            | 1600x550x850 mm<br>(LxWxH)     |
| Stock              | 1                              |

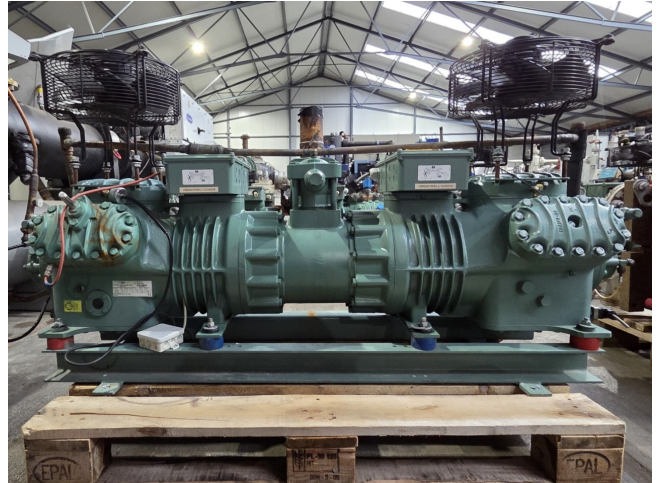

### Description

#### Used Bitzer 66H-50.2 Y / 6H-25.2 Y (x2)

Used Bitzer 66H-50.2 Y semi-hermetic reciprocating tandem compressor on Freon. Complete with a Bitzer 6H-25.2 Y (x2) semi-hermetic reciprocating compressors, 2 Ziehl-Abegg FE031-4DZ.0C.3 fans - 0,12/0,19 kW - 1410/1670 RPM - 50/60 Hz, pressure safety switches and sight glasses. The compressor has a displacement of 221,0 m<sup>3</sup>/h at 50 Hz and 266,6 m<sup>3</sup>/h at 60 Hz.

\*Why choose for HOSBV? We are not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. \*If requested we are happy to arrange your logistics.

