Bitzer 4H-15.2Y-40P (x3) & 4J-13.2Y-40P (x2)

Specifications

Бренд	Bitzer
Тип	4H-15.2Y-40P (x3) & 4J-13.2Y-40P (x2)
Хладагент	Freon
Refrigerant type	R507
kW at -5ºC/+40ºC	153,0/87,6*
кВт at -10ºC/+40ºC	126,6/72,2*
кВт at -20ºC/+40ºC	83,7/47,6*
кВт at -30ºC/+40ºC	52,0/29,2*
кВт at -40ºC/+40ºC	29,2/15,9*
kW at -45ºC/+40ºC	20,4/10,8*
На стальной раме	✓
Прессостаты	✓
Манометры	✓
Прессостаты конденсатора	✓
Смотровое стекло	✓
Панель управления	✓
m3 / h	Cooling: 50 Hz - 221,1 m³/h / 60 Hz 266,7 Freezing: 50 Hz - 127,0 m³/h / 60 Hz - 153,4 m³/h
Примечания |	Y.o.b. 2007
Package / Rack	✓

	(LxWxH)
Packers	3200x800x1950 mm

Description

Used Bitzer 4H-15.2Y-40P (x3) & 4J-13.2Y-40P (x2)

Used Profroid VZP330-4010SAT2 central cooling and freezing installation on Freon. Complete with 3 Bitzer 4H-15.2Y-40P (Cooling) & 2 Bitzer 4J-13.2Y-40P (Freezing) semi-hermetic reciprocating compressors, brazed heat exchanger for heat recovery, pressure and safety switches and a control cabinet with Danfoss controllers. The cooling compressors have a total displacement of 221,1 m³/h at 50 Hz & 266,7 m³/h at 60 Hz and the freezing compressors have a displacement of 50 Hz - 127 m³/h & 153,4 m³/h at 60 Hz. *Why choose for HOSBV? We are not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and an industrial cleaning. *Optionally we can also perform a new paint job and arrange the logistics.

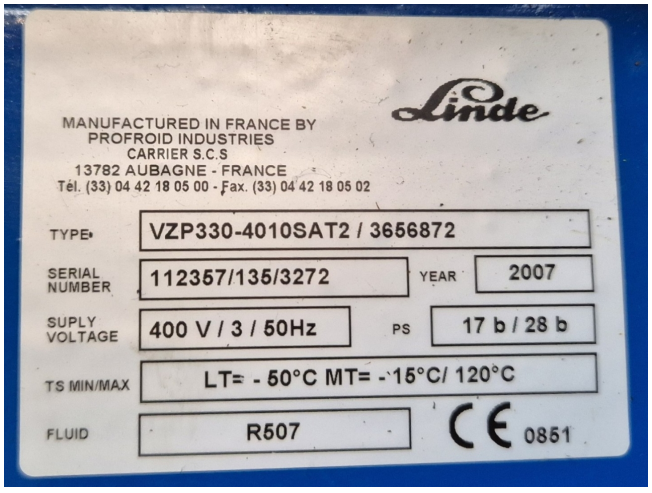
Linde
MANUFACTURED IN FRANCE BY
PROFROID INDUSTRIES
CARRIER S.C.S
13782 AUBAGNE - FRANCE
Tél. (33) 04 42 18 05 00 - Fax. (33) 04 42 18 05 02
TYPE
VZP330-4010SAT2 / 3656872
SERIAL NUMBER
112357/135/3272
YEAR
2007
SUPLY VOLTAGE
400 V / 3 / 50Hz
PS
17 b / 28 b
TS MIN/MAX
LT= - 50°C MT= -15°C/ 120°C
FLUID
R507
CE 0851

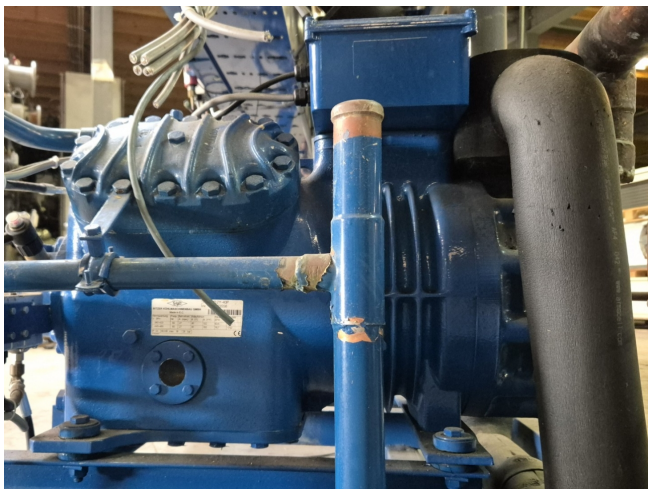

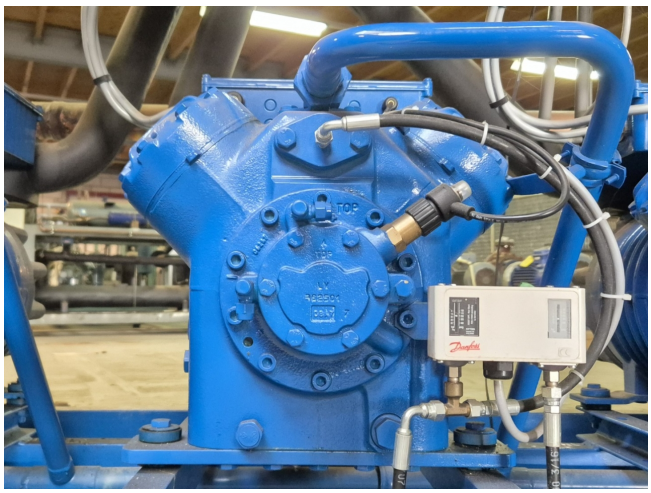

Typ 4H-15.2Y-40P
S.Nr. 1672307983
BITZER KÜHLMASCHINENBAU GMBH
Made in E.C.
Nennspannung V 3Ph~ | Frequ. Hz | Betr.strom A (max.) | Anlaufstrom A (Y) | A (YY) | Fördervol. m³/h | Drehzahl min⁻¹
380-420 | 50 | 31 | 81 | 132 | 73,7 | 1450
440-480 | 60 | 31 | 81 | 132 | 88,9 | 1750
IP 54 | ND/HD max. 19 / 28 bar
37802805

Typ 4H-15.2Y-40P
S.Nr. 1672307985
BITZER KÜHLMASCHINENBAU GMBH
Made in E.C.
Nennspannung V 3Ph~ | Frequ. Hz | Betr.strom A (max.) | Anlaufstrom A (Y) | A (YY) | Fördervol. m³/h | Drehzahl min⁻¹
380-420 | 50 | 31 | 81 | 132 | 73,7 | 1450
440-480 | 60 | 31 | 81 | 132 | 88,9 | 1750
IP 54 | ND/HD max. 19 / 28 bar

Typ 4H-15.2Y-40P
S.Nr. 1672206569
BITZER KÜHLMASCHINENBAU GMBH
Made in E.C.
Nennspannung V 3Ph~ | Frequ. Hz | Betr.strom A (max.) | Anlaufstrom A (Y) | A (YY) | Fördervol. m³/h | Drehzahl min⁻¹
380-420 | 50 | 31 | 81 | 132 | 73,7 | 1450
440-480 | 60 | 31 | 81 | 132 | 88,9 | 1750
IP 54 | ND/HD max. 19 / 28 bar
37802805

Typ 4J-13.2Y-40P
S.Nr. 1672203554
BITZER KÜHLMASCHINENBAU GMBH
Made in E.C.
Nennspannung V 3Ph~ | Frequ. Hz | Betr.strom A (max.) | Anlaufstrom A (Y) | A (YY) | Fördervol. m³/h | Drehzahl min⁻¹
380-420 | 50 | 27 | 81 | 132 | 63,5 | 1450
440-480 | 60 | 27 | 81 | 132 | 76,7 | 1750
IP 54 | ND/HD max. 19 / 28 bar
37802805

Typ 4J-13.2Y-40P
S.Nr. 1672203558
BITZER KÜHLMASCHINENBAU GMBH
Made in E.C.
Nennspannung V 3Ph~ | Frequ. Hz | Betr.strom A (max.) | Anlaufstrom A (Y) | A (YY) | Fördervol. m³/h | Drehzahl min⁻¹
380-420 | 50 | 27 | 81 | 132 | 63,5 | 1450
440-480 | 60 | 27 | 81 | 132 | 76,7 | 1750
IP 54 | ND/HD max. 19 / 28 bar
37802805

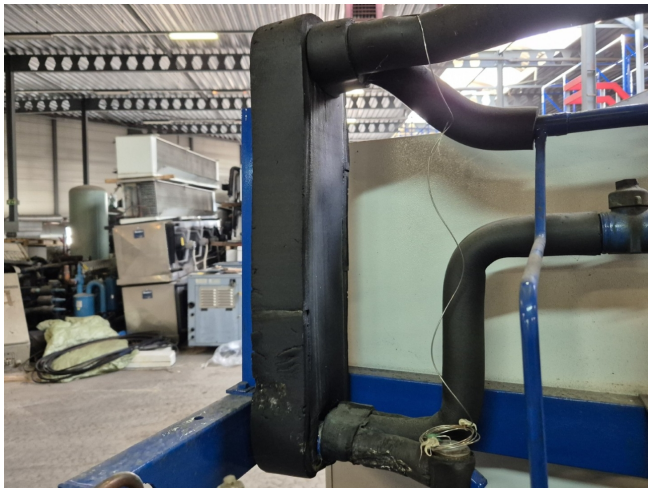

BEDRIJF
BEDRIJF
BEDRIJF
BEDRIJF
STORING
STORING
STORING
STORING
CONDENSOR VENTILATOR 3+4
CONDENSOR VENTILATOR 7+8
CONDENSOR VENTILATOR 1+2
CONDENSOR VENTILATOR 5+6
Hand
Autom.

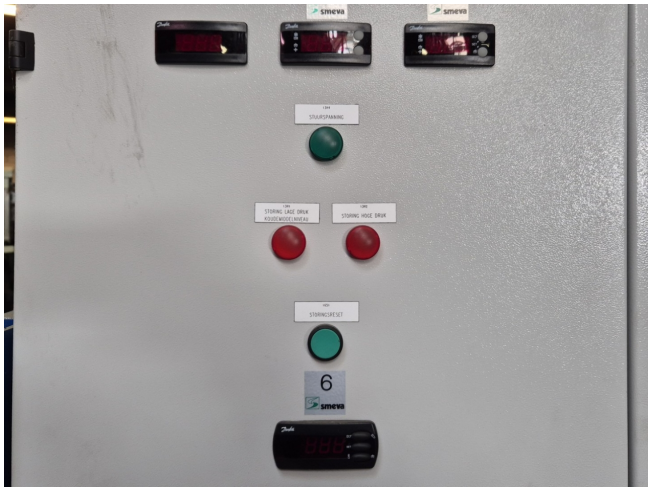
smeva
smeva
6
smeva