

Baltimore VXC 250 R

Specifications

Производитель	Baltimore
Тип	VXC 250 R
Тип продукта	Evaporating Condenser
кВт	1078
К-во вентиляторов	3
Скорость вращения вентиляторов	1500
Хладагент	NH 3 / Freon
Примечания	Motor: 18,5 kW at 1500 RPM // Pump: 2,2 kW at 2840 RPM // Shipping Weight: 4.770 kg. //
Remarks	yob2012
Stock	1





Description

Used Baltimore VXC 250 R

Used Baltimore VXC 250 . *All components of this used condensers will be tested on good working, leak free condition (electro engines), condensing block, bearings. Choosing HOSBV means buying with warranty. We perform a industrial cleaning and rust spots will be covered. Also, we can arrange your shipment.



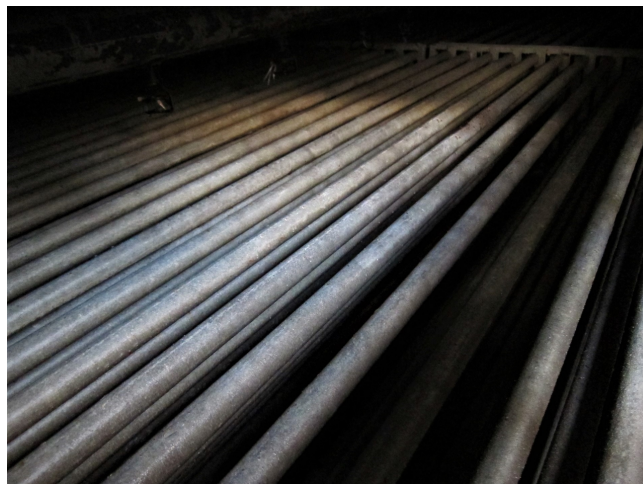

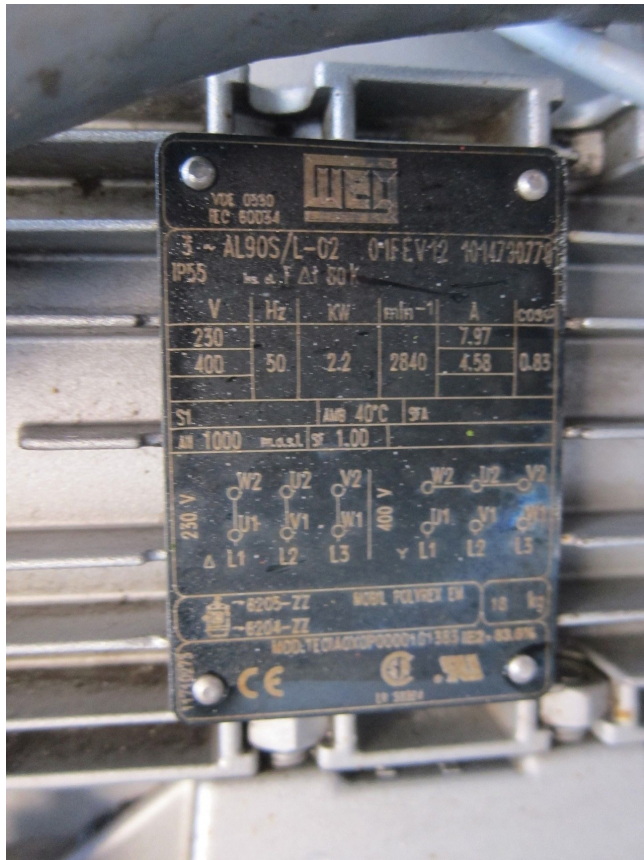

VERDAMPINGSCONDENSOR E-121

FABRIKAAT	:BALTIMORE
TYPE	:VXC-N250/VH-3
CAPACITEIT	:880 kW
COND. TEMP.	:+35 °C
N.B. TEMP.	:+22 °C
CONSTR./CERT.	:STOOMWEZEN
WATERVERBRUK	:ca. 2,7 m ³ /h (0,74 dm ³ /sec)
SPIJ-FACITOR	:2

VENTILATORMOTOR M-121

VERMOGEN	:18,5 kW
TOERENTAL	:1500/750 omw./min.
NOM. STROOM	:37,5 Amp
STARTSTROOM	:6 x I-nom (D.O.L.)
SPANNING	:380V-3pH-50Hz

WATERPOMP P-121

VERMOGEN	:2,2 kW
TOERENTAL	:2900 omw./min.
NOM. STROOM	:4,85 Amp
SPANNING	:380V-3pH-50Hz

BAKVERWARMING HE121.05 & HE121.06

VERMOGEN	:3 kW
SPANNING	:380V-3pH-50Hz
VOLUME NH3 SECTIE	ca. : 900 dm ³
NH3 VULLING NORMAL BEDRIJF	: 145 Kg
TRANSPORTGEWICHT	ca. : 7500 Kg
BEDRIJFSGEWICHT	ca. : 8800 Kg
GELUIDSNIVEAU	: 59 dB(A) 3mtr.