

Baltimore VXMC N 410 R

Specifications

Производитель	Baltimore
Тип	VXMC N 410 R
Тип продукта	Evaporating Condenser
кВт	1766.4
К-во вентиляторов	1
Хладагент	NH 3 / Freon
Поток воздуха м³/час	136.800
вес	7910 kg
Stock	2





Description

Used Baltimore VXMC N 410 R

Used Baltimore VXMC N 410 R condenser on NH3/Freon. The condenser has a air flow of 136.800 m³/h. Complete with 1 fan and GEC D160M electric motor - 50 Hz - 9,5/2,2 kW - 1465/740 RPM.

*All components of this used condenser will be tested on adequate functionality, leak-free condition (electro engines), condensing block and bearings. Choosing HOS BV means buying with warranty. We perform an industrial cleaning on demand, we can arrange your shipment.

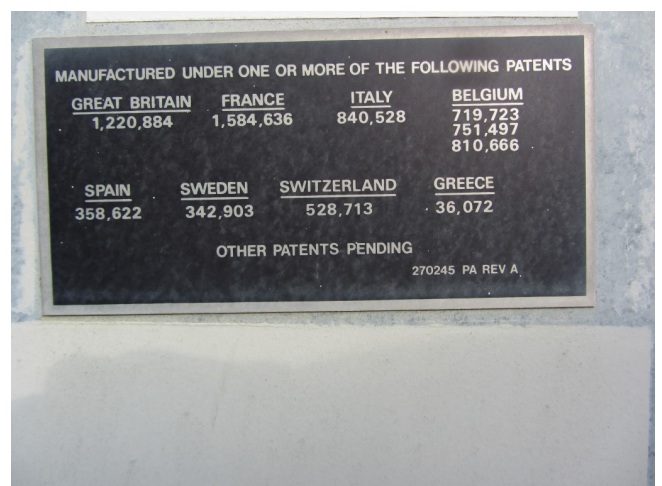

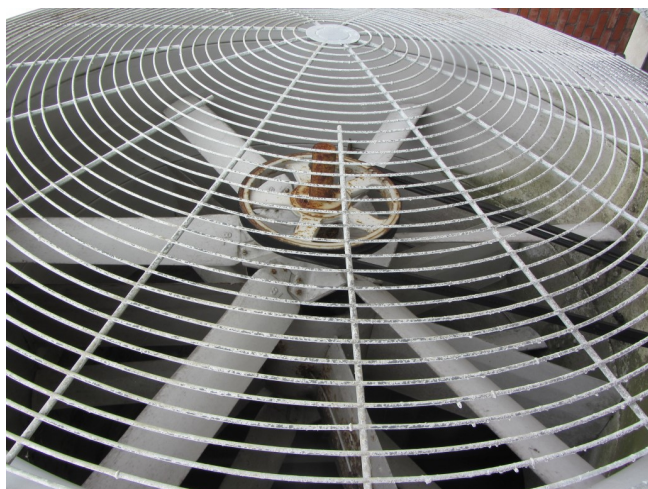

TABEL 1 - Nominale Kapaciteit - Model VXC (kW)

TYPE NR. VXC	KAPACITEIT (kW)	TYPE NR. VXC	KAPACITEIT (kW)	TYPE NR. VXC	KAPACITEIT (kW)
10	43,1	185	797,1	590	2541,9
15	64,6	N205	883,2	N600	2585,0
20	86,2	N230	990,9	620	2671,2
25	107,7	N250	1077,1	650/N650	2800,4
30	129,3	N275	1184,8	680	2929,7
38	163,8	N300	1292,5	720/N720	3102,0
46	198,2	320	1378,7	760/N760	3274,3
52	224,1	N325	1400,2	N800	3446,7
58	249,9	340	1464,9	840	3619,0
65	280,1	360/N360	1551,0	900	3877,5
72	310,2	380/N380	1637,2	960	4222,2
80	344,7	N400	1723,4	1060	4566,8
90	387,8	420	1809,5	1100	4739,1
100	430,9	450	1938,8	1180	5083,8
110	473,9	N460	1981,8	1240	5342,3
125	538,6	490	2111,1	1300	5600,8
135	581,7	N500	2154,2	1360	5861,6
150	646,3	530	2283,4		
165	710,9	550/N550	2369,6		

TABEL 2 - Nominale Kapaciteit - Model VXM (kW)

TYPE NR. VXM	KAPACITEIT (kW)	TYPE NR. VXM	KAPACITEIT (kW)	TYPE NR. VXM	KAPACITEIT (kW)
10	43,1	180	775,6	530	2.283,4
15	64,6	N205	883,2	N540	2.326,5
20	86,2	N230	990,9	550	2.369,6
25	107,7	N250	1.077,1	590	2.541,9
30	129,3	N270	1.163,3	N600	2.585,0
38	163,8	N300	1.292,5	620	2.671,2
46	198,2	320	1.378,7	N650	2.800,4
52	224,1	N325	1.400,2	720/N720	3.102,0
58	249,9	340	1.464,9	N740	3.188,2
65	280,1	360/N360	1.551,0	760	3.274,3
72	310,2	N370	1.594,1	N800	3.446,7
80	344,7	380	1.637,2	820	3.532,8
90	387,8	N400	1.723,4	900	3.877,5
100	430,9	410/N410	1.766,4	980	4.222,2
110	473,9	450	1.938,8	1060	4.566,8
125	538,6	N460	1.981,8	1100	4.739,1
135	581,7	490	2.111,1	1180	5.083,8
150	646,3	N500	2.154,2	1240	5.342,3
165	710,9				