

Güntner GFD 080B/2x6-N(D)-F6/2P

Specifications

Производитель	Güntner
Тип	GFD 080B/2x6-N(D)-F6/2P
Тип продукта	Drycooler
кВт	796
К-во вентиляторов	12
Скорость вращения вентиляторов	880/660
Хладагент	Glycol
Поток воздуха м³/час	230.400
диаметр вентиляторов	800 mm
Ø	
поверхность (m2)	3.015
Объем трубки	364 dm³
Размеры	7650x2180x2300 mm (LxWxH)
вес	2.640 kg
Примечания	y.o.b. 2004
Stock	1





Description

Used Güntner GFD 080B/2x6-N(D)-F6/2P

Used Guntner GFD 080B/2x6-N(D)-F6/2P drycooler. Complete with 12 Ziehl-Abegg fans 50 Hz - 2,0/1,25 kW - 880/660 RPM - diameter 800 mm.

*All components of this used condensers will be tested on good working, leak free condition (electro engines), condensing block, bearings. Choosing HOSBV means buying with warranty. We perform a industrial cleaning and rust spots will be covered. Also, we can arrange your shipment.

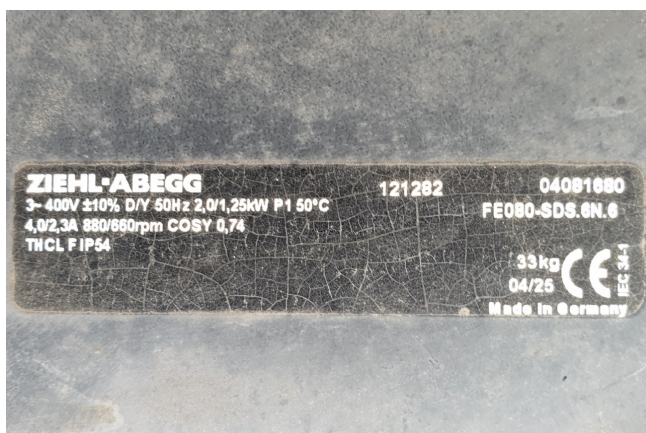

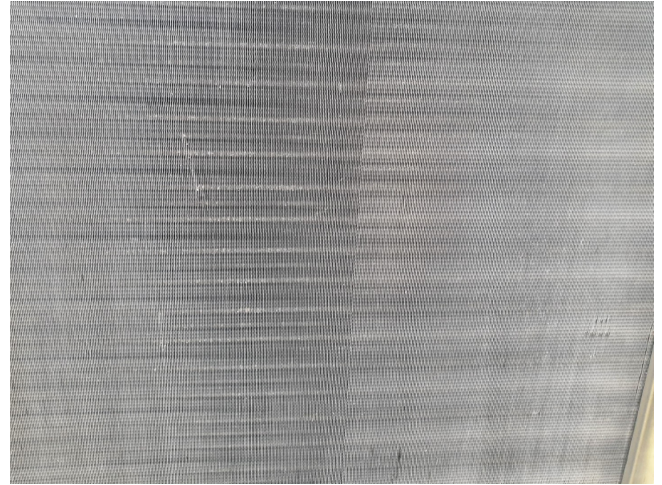

Typ	$\dot{Q}_{th}$ Nennleistung Ethylenglykol Nominal capacity Ethylene glycol 34 Vol% 40/35 °C 23 °C		$\dot{V}_l$ Luftvolumenstrom Air volume flow		Ethylenglykol Ethylene glycol		aufgenommene elektrische Leistung consumed power		Motornenn- daten je Ventilator Nominal ratings per fan		Schalldruck- pegel Sound pressure level		Strang-Anzahl Number of branches		
	Type	Δ	Y	Δ	Y	Volumenstrom Volume flow	Druckverlust Pressure drop	P_e total	Δ	Y	Δ	Y			
Δ	Y	Δ	Y	Δ	Y	Δ	Y	Δ	Y	Δ	Y	Δ	Y		
N	080.1A/2x2	222	188	82400	64400	43	36	0.6	0.4	6.8	4.5	D/D	54	47	5
	080.1B/2x2	270	220	76800	59200	52	42	0.7	0.5	6.9	4.6	D/C	54	47	6
	080.1A/2x3	328	278	123600	96600	63	54	0.4	0.3	10.2	6.8	D/D	56	49	3
	080.1B/2x3	405	330	115200	88800	77	63	0.7	0.5	10.3	6.8	D/C	56	49	4
	080.1A/2x4	425	360	164800	128800	81	69	0.3	0.2	13.6	9.0	D/D	57	50	2
	080.1B/2x4	537	437	153600	118400	103	84	0.6	0.4	13.8	9.1	D/C	57	50	3
	080.1A/2x5	550	466	206000	161000	106	90	0.6	0.4	17.0	11.3	D/D	58	51	2
	080.1B/2x5	650	529	192000	148000	125	102	0.4	0.3	17.2	11.4	D/C	58	51	2
	080.1A/2x6	675	572	247200	193200	130	110	1.0	0.7	20.4	13.6	D/D	58	51	2
	080.1B/2x6	796	647	236400	177600	152	124	0.6	0.4	20.6	13.7	D/C	58	51	2
	080.1A/2x7	801	677	288400	225400	153	130	1.5	1.1	23.8	15.8	D/D	59	52	2
	080.1B/2x7	941	765	268800	207200	181	147	1.0	0.7	24.1	16.0	D/C	59	52	2
	080.1A/2x8	926	783	329600	257600	178	150	2.2	1.6	27.2	18.1	D/D	59	52	2
	080.1B/2x8	1087	883	307200	236800	209	169	1.4	1.0	27.5	18.2	D/C	59	52	2
	080.1A/2x2	183	151	60000	46800	35	29	0.7	0.5	3.1	2.0	C/B	47	41	6
	080.1B/2x2	215	171	56000	42800	41	33	1.0	0.6	3.1	2.0	B/B	47	41	8
080.1A/2x3	275	227	90000	70200	53	44	0.7	0.5	4.6	2.9	C/B	49	43	4	
080.1B/2x3	321	256	84000	64200	62	49	0.8	0.5	4.7	2.9	B/B	49	43	5	
080.1A/2x4	365	302	120000	93600	70	58	0.7	0.5	6.2	3.9	C/B	50	44	3	
080.1B/2x4	430	341	112000	85600	82	66	0.9	0.6	6.2	3.9	B/B	50	44	4	
080.1A/2x5	442	365	150000	117000	85	70	0.4	0.3	7.7	4.9	C/B	51	45	2	