

Güntner GGHN 080.2H/27-AND50/12P.E

Specifications

Brand	Güntner
Type	GGHN 080.2H/27-AND50/12P.E
kW	118,6
Refrigerant	Glycol
Number of Fans	2
Fin Space in mm	7
Defrosting	None
m³/h	34.420
Sizes	3980x880x1260 mm (LxWxH)
Remarks	Y.o.b. 2018
Volume	110 dm³
Weight	531 kg
Stock	1



Description


Used Güntner GGHN 080.2H/27-AND50/12P.E


Used and in excellent condition Güntner GGHN 080.2H/27-AND50/12P.E evaporator. Complete with 2 Zielh-Abegg fans 50 Hz - 1,03/0,4 kW - 890/650 RPM - diameter 800 mm. Build in 2018.

*All components of this used evaporator will be tested on good working, leak free condition (electro engines), coils, bearings) Choosing HOSBV means buying with warranty. We perform a industrial cleaning and rust spots will be covered. Also, we can arrange your shipment.



Guntner GmbH & Co. KG Hans-Guntner-Strasse 2 - 6 82256 Fürstenfeldbruck www.guntner.de					
ERC					
Projektnummer - Project number			101063300		
Gerätebezeichnung - Unit name			GGHN 080 2H/27-AND60/12P.E		
Gerät Seriennummer - Unit serial number			40464890002 01248		
Ventilator/Drehzahl/Stromaufn. - Fan/D/Speed/Current			VT01247 / 938 / 890 min.-1 / 2.7 A		
Umgebungstemperatur - Ambient air temperature			-30 °C / +50 °C		
Herstellungsjahr - Year of manufacture			2018		
Druckgerät Seriennr. - Pressure equipment serial no.			40464890102 01249		
Volumen - Volume (V)			117.7 l		
Max. zulässiger Druck (PS)			10 / 0 bar		0 / -1 bar
Max. permissible pressure (PS)					
Zulässige min./max. Temperatur (TS)			-50 °C / +100 °C		-50 °C / +40 °C
Permissible min./max. temperature (TS)					
Prüfdruck(PT)/Prüfmedium - Test pressure(PT)/Test medium			11 bar / Druckluft - Compressed air		
Prüfdatum - Test date			2018.01.27		
Fluidgruppe / Zustand - Group of fluid / State			2 / flüssig - liquid		

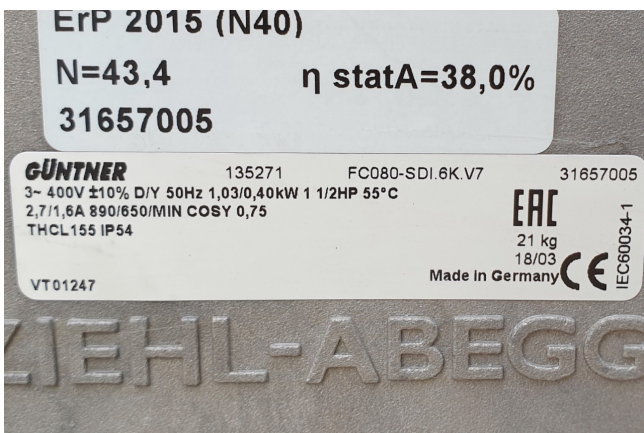

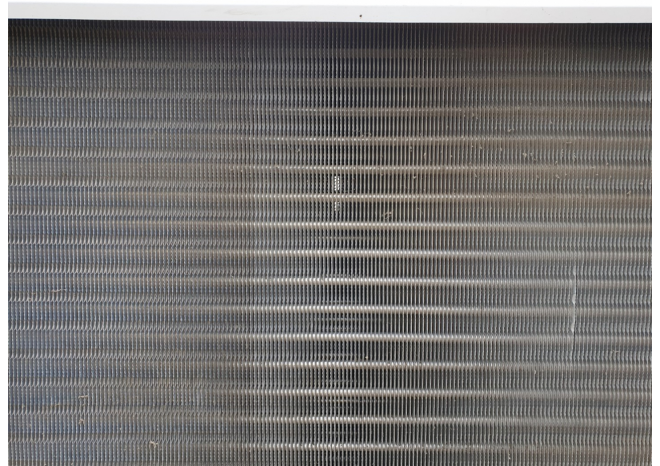



		GGHN - 2 Ventilatoren - 2 Fans																														
Typ	Type	$t_f = -3\text{ °C}$; $d_p = 0.8\text{ bar}$ Glykol 25% $t_f = 10\text{ °C}$ bei 85% r.F. glycol 25% $t_f = 10\text{ °C}$ at 85% relative humidity																														
		Leistung Capacity	Volumenstrom Volume flow rate	Soleaustritt Bine outlet	Fläche Surface	Luftvolumenstrom Air volume flow	Wirkweite ohne Streamer Air throw without Streamer	Wirkweite mit Streamer Air throw with Streamer	Schalldruck Sound pressure	Ein- Inlet	Aus- Outlet	Block Coil	Tropfenwanne Drip tray	Gesamt Total	Anschlüsse Connections	El. Abtauheizung El. defrost	400 V	Anschlüsse Connections	El. Abtauheizung El. defrost	400 V												
																				Aufgabendaten Task data		Lage Location		Ventilations- ventilation		optional connection label						
																				kW	l/s	l/s	l/s	l/s	l/s	l/s	l/s	l/s	l/s	l/s	l/s	l/s
																				kW	l/s	l/s	l/s	l/s	l/s	l/s	l/s	l/s	l/s	l/s	l/s	l/s
040.2D/24-ANW50		17.4	4.7	0.3	65.4	6120	12	27	55	35.0	35.0	3750	1200	4.95	1 x A	0.43	1 x E															
040.2F/24-ANW50		18.2	2.5	3.7	98.0	5620	11	26	55	35.0	35.0	6250	1700	7.95	1 x B	0.44	1 x E															
040.2H/24-ANW50		23.8	3.8	2.7	102.6	10220	17	36	59	35.0	35.0	4500	2300	6.80	1 x B	0.99	1 x E															
045.2E/24-ANW50		30.7	6.3	1.4	128.3	9720	16	35	59	42.0	42.0	6000	2300	8.30	1 x B	1.01	1 x E															
050.2D/24-ANW50		29.6	5.0	2.4	134.5	13300	21	41	59	42.0	42.0	7000	2400	9.40	1 x B	1.03	1 x E															
050.2E/24-ANW50		38.8	6.9	2.1	168.2	12940	21	39	59	54.0	54.0	8750	2400	11.15	1 x B	1.05	1 x E															
050.2F/24-ANW50		43.5	7.9	2.0	201.8	12600	20	37	59	54.0	54.0	10500	3600	14.10	1 x B	1.07	1 x E															
071.2D/24-ANW50		54.5	8.6	2.7	235.3	23520	35	64	57	54.0	54.0	12500	4500	17.00	2 x C	1.59	2 x G															
071.2E/24-ANW50		64.7	10.6	2.6	294.1	22460	35	63	57	54.0	54.0	15000	4500	19.50	2 x C	1.61	2 x G															
071.2F/24-ANW50		73.9	12.5	2.4	352.9	21580	34	61	57	64.0	64.0	17500	4500	22.00	2 x C	1.64	2 x G															
080.2D/24-ANW50		90.1	16.5	2.0	369.0	35940	43	75	66	64.0	64.0	18000	6000	24.00	2 x C	2.69	2 x G															
080.2E/24-ANW50		108.5	20.6	1.8	461.3	34560	42	73	66	76.1	76.1	24000	6000	30.00	3 x C	2.71	2 x G															
080.2F/24-ANW50		123.1	24.7	1.5	553.6	33440	41	71	66	88.9	88.9	27000	6000	33.00	3 x C	2.72	2 x G															
040.2F/27-ANW50		15.7	2.5	2.8	57.7	6200	13	27	55	35.0	35.0	6250	1700	7.95	1 x B	0.43	1 x E															
040.2H/27-ANW50		21.5	4.6	1.2	76.9	5860	12	26	55	42.0	42.0	7500	1700	9.20	1 x B	0.43	1 x E															
045.2E/27-ANW50		23.9	4.8	1.6	75.5	10640	17	39	59	42.0	42.0	6000	2300	8.30	1 x B	0.98	1 x E															
045.2F/27-ANW50		28.0	5.7	1.5	90.6	10380	16	38	59	42.0	42.0	7500	3450	10.95	1 x B	0.99	1 x E															
045.2H/27-ANW50		34.9	7.6	1.2	120.8	9680	16	36	59	54.0	54.0	10500	3450	13.95	1 x B	1.01	1 x E															
050.2F/27-ANW50		35.1	6.3	2.1	118.7	13400	22	41	59	54.0	54.0	10500	3600	14.10	1 x B	1.01	1 x E															
050.2H/27-ANW50		41.6	6.6	2.7	158.3	12840	21	39	59	54.0	54.0	15750	3600	19.35	2 x B	1.05	1 x E															
071.2E/27-ANW50		49.7	7.7	2.9	173.0	24400	35	65	57	54.0	54.0	15000	4500	19.50	2 x C	1.56	2 x G															
071.2F/27-ANW50		53.1	6.9	3.9	207.6	23780	35	64	57	54.0	54.0	17500	4500	22.00	2 x C	1.59	2 x G															
071.2H/27-ANW50		80.3	17.3	1.2	276.8	22380	35	61	57	76.1	76.1	22500	4500	27.00	2 x C	1.61	2 x G															
080.2E/27-ANW50		79.8	13.3	2.5	271.3	37040	44	76	66	64.0	64.0	24000	6000	30.00	3 x C	2.68	2 x G															
080.2F/27-ANW50		94.0	15.9	2.4	325.6	36340	43	75	66	76.1	76.1	27000	6000	33.00	3 x C	2.68	2 x G															
080.2H/27-ANW50		118.6	21.2	2.1	434.2	34420	42	73	66	88.9	88.9	36000	6000	42.00	4 x C	2.71	2 x G															
040.2F/210-ANW50		13.5	2.5	2.0	41.6	6420	14	28	55	35.0	35.0	6250	1700	7.95	1 x B	0.42	1 x E															