

Güntner GVH 065.1A/2

Specifications

Brand	Güntner
Type	GVH 065.1A/2
Product type	Air Cooled Condenser
kW	52,1
Number of Fans	2
RPM of the Fans	650/490
Refrigerant	Freon
Air Flow in m ³ /h	12.440
diameter fans Ø	650 mm
Surface (m2)	136
Tube volume	30 dm ³
Sizes	2310x1140x1480 mm (LxWxH)
Weight	184 kg
Stock	1




Description

Used Güntner GVH 065.1A/2

Used Güntner GVH 065.1A/2 air cooled condensor. Complete with 2 Ziehl-Abegg fans 50 Hz - 0,20/0,09 kW - 650/490 RPM - diameter 650 mm. Mentioned capacity at delta is 52,1 kW and capacity at star is 42,0 kW.

*All components of this used condensor will be tested on good working, leak free condition (electro engines), condensing block, bearings. Choosing HOSBV means buying with warranty. We perform a industrial cleaning. Also, we can arrange your shipment.

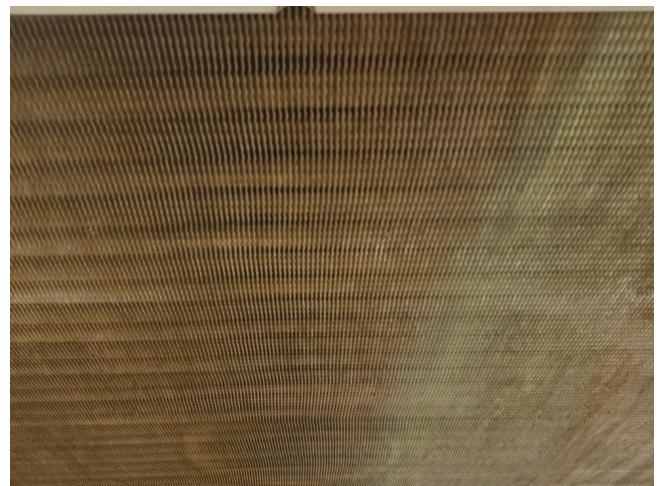



	$\dot{Q}_{ev}$		$\dot{V}_l$		aufgenommene el. Leistung		Energieeffizienzklasse Energy efficiency class	Schalldruckpegel		Stranganzahl Number of passes	Gewicht Weight	Rohrvolumen Tube volume	Fläche Surface				
Typ	Nennleistung		Luftvolumenstrom		ei. Leistung			Sound pressure level									
	Nominal capacity		Air volume flow		consumed power			dB(A)10m									
	Type	R404A $\Delta t = 15\text{ K}$				$P_{e, total}$											
	Δ	Y	Δ	Y	Δ	Y	Δ / Y	Δ	Y								
	kW	kW	m ³ /h	m ³ /h	kW	kW		dB(A)10m			kg	l	m ²				
045.1A/1 ... W	11,7	—	2570	—	0,12	—	B	31	—	4	61	8	40				
045.1C/1 ... W	13,6	—	2890	—	0,12	—	A	31	—	6	72	10	54				
045.1A/2 ... W	23,8	—	5210	—	0,24	—	B	34	—	9	108	15	83				
045.1C/2 ... W	27,8	—	5830	—	0,23	—	A	34	—	9	133	19	111				
045.1A/3 ... W	35,8	—	7850	—	0,35	—	B	35	—	13	156	23	126				
045.1C/3 ... W	41,4	—	8770	—	0,35	—	A	35	—	18	192	30	167				
050.1A/1 ... D+S	16,0	13,4	3650	2920	0,13	0,09	A / A	31	27	6	82	11	50				
050.1C/1 ... D+S	19,2	16,1	4080	3310	0,13	0,08	A / A	31	27	6	96	16	73				
050.1A/2 ... D+S	32,6	27,3	7390	5920	0,26	0,17	A / A	34	30	12	152	22	104				
050.1C/2 ... D+S	38,6	32,5	8190	6640	0,26	0,17	A / A	33	29	12	179	31	150				
050.1A/3 ... D+S	49,6	41,5	11120	8910	0,4	0,26	A / A	35	31	15	221	32	157				
050.1B/3 ... D+S	54,6	45,9	11850	9560	0,39	0,26	A / A	35	31	15	241	40	191				
050.1C/3 ... D+S	58,0	48,8	12300	9980	0,38	0,25	A / A	35	31	20	261	47	226				
050.1B/4 ... D+S	72,9	61,3	15810	12770	0,52	0,34	A / A	36	32	20	321	53	256				
065.1A/1 ... D+S	25,2	20,2	6150	4850	0,36	0,23	B / B	40	33	10	99	16	66				
065.1B/1 ... D+S	28,4	23,1	6640	5100	0,35	0,23	B / B	40	33	10	112	19	81				
065.1C/1 ... D+S	30,9	25,2	6980	5420	0,34	0,22	B / A	40	33	10	123	22	96				
065.1A/2 ... D+S	52,1	42,0	12440	9840	0,72	0,46	B / B	43	36	16	184	30	156				
065.1B/2 ... D+S	57,9	46,7	13390	10290	0,7	0,45	B / B	42	35	20	207	36	166				
065.1C/2 ... D+S	62,5	51,0	14040	10910	0,68	0,45	B / A	42	35	20	230	43	196				
065.1A/3 ... D+S	79,2	63,9	18740	14220	1,07	0,69	B / B	44	37	20	268	46	206				
065.1B/3 ... D+S	87,5	71,0	20130	15490	1,05	0,68	B / B	44	37	27	302	56	251				
065.1C/3 ... D+S	94,5	77,1	21090	16390	1,02	0,67	B / A	44	37	27	345	66	296				
065.1B/4 ... D+S	116,8	94,3	26870	20680	1,4	0,9	B / B	45	38	41	473	73	336				