Hermetic CAM 2/4

Specifications

Brand	Hermetic
Type	CAM 2/4
Volume flow Q max. (m^3/h)	12,5
Delivery height H max. (m)	51,0
Power max. (kW)	4,3
Remarks |	Y.o.b. 2012
Stock	1

Description

Used Hermetic CAM 2/4

Used Hermetic CAM 2/4 liquid pump with the following specifications: Qmax: 12,5 m^3/h - Hmax: 51,0 m - Pmax: 4,3 kW. Sizes: 660x260x260 mm (LxWxH).

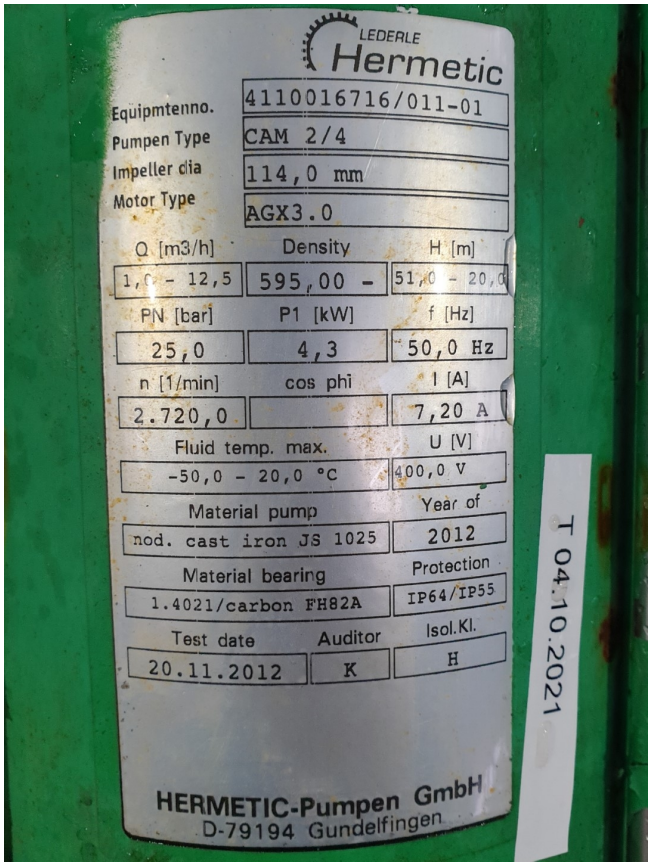
LEDERLE
Hermetic
Equipmtenno. 4110016716/011-01
Pumpen Type CAM 2/4
Impeller dia 114,0 mm
Motor Type AGX3.0
Q [m3/h] Density H [m]
1,0 - 12,5 595,00 - 51,0 - 20,0
PN [bar] P1 [kW] f [Hz]
25,0 4,3 50,0 Hz
n [1/min] cos phi I [A]
2.720,0 7,20 A
Fluid temp. max. U [V]
-50,0 - 20,0 °C 400,0 V
Material pump Year of
nod. cast iron JS 1025 2012
Material bearing Protection
1.4021/carbon FH82A IP64/IP55
Test date Auditor Isol.Kl.
20.11.2012 K H
T 04.10.2021
HERMETIC-Pumpen GmbH
D-79194 Gundelfingen