


Bitzer 4G.2

Specifications

Brand	Bitzer
Type	4G.2
Refrigerant	Freon
kW at 0°C/+40°C	70,9
kW at -5°C/+40°C	58,7
kW at -10°C/+40°C	48,2
kW at -20°C/+40°C	31,2
kW at -30°C/+40°C	18,8
kW at -40°C/+40°C	10,1
kW at -45°C/+40°C	6,8
Unloaded Start	✓
Capacity Control	✓
On steel base frame	✓
Pressure safety switches	✓
Hp/Lp/Op	
Pressure gauges	✓
Hp/Lp/Op	
Oil separator	✓
m3 / h	102
Remarks	Y.o.b. 2007
Sizes	1140x660x910 mm (LxWxH)
Stock	1


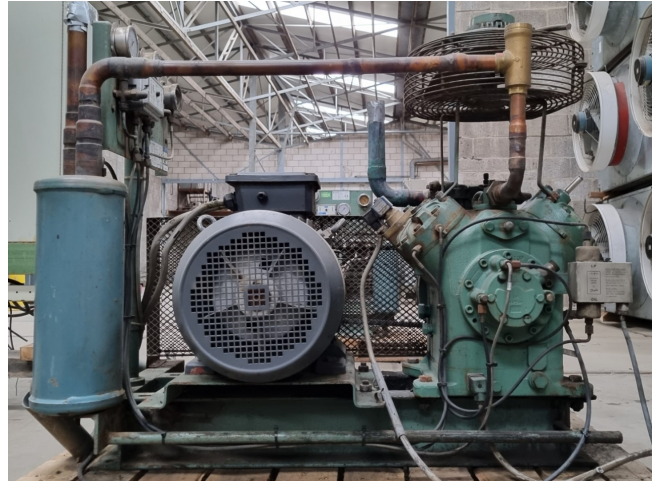




Description

Used Bitzer 4G.2

Used Bitzer 4G.2 open-type reciprocating compressor on Freon with a sight glass. Complete with a Techtop T3CR 160L-4 electric motor - 50/60 Hz - 15/18 kW - 1445/1730 RPM, AC&R S-5692 oil separator and pressure and safety switches/gauges. The compressor has a displacement of 102 m³/h at 1750 RPM.

*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment soley if it has passed our extensive quality test and after it has been cleaned industrially. *If requested we are happy to arrange your shipment.

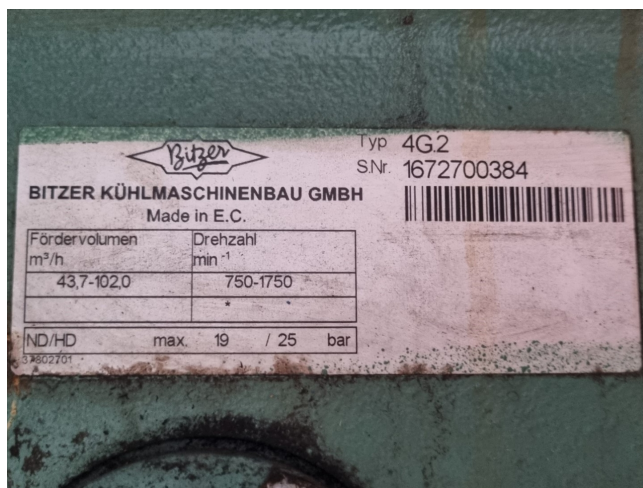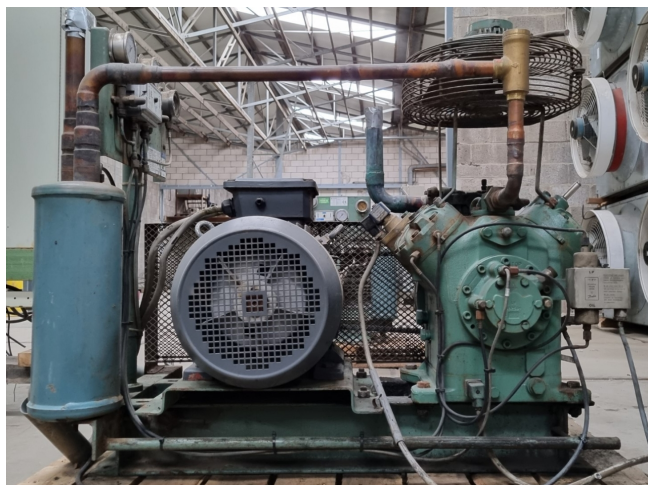

		Typ 4G.2
BITZER KÜHLMASCHINENBAU GMBH		S.Nr. 1672700384
Made in E.C.		
Fördervolumen m³/h	Drehzahl min⁻¹	
43.7-102.0	750-1750	
ND/HD	max. 19 / 25 bar	

