


# Bitzer 4DC-7.2Y-40S Condensing unit

## Specifications

Brand	Bitzer
Type	4DC-7.2Y-40S Condensing unit
Refrigerant	Freon
kW at 0°C/+40°C	21,1
kW at -5°C/+40°C	17,5
kW at -10°C/+40°C	14,3
kW at -20°C/+40°C	9,3
kW at -30°C/+40°C	5,5
kW at -40°C/+40°C	2,8
On steel base frame	✓
Pressure safety switches	✓
Hp/Lp/Op	
Liquid receiver	✓
Liquid receiver ltr.	15
Liquid line filter drier	✓
Sight Glass	✓
m <sup>3</sup> / h	26,9 m <sup>3</sup> /h at 50 Hz & 32,4 m <sup>3</sup> /h at 60 Hz
Remarks	Y.o.b. 2004
Condensing Unit	✓
Sizes	1500x1000x780 mm (LxWxH)
Stock	1

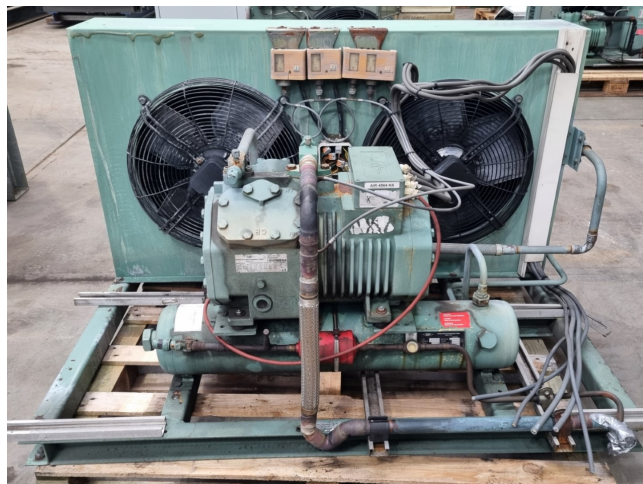

## Description

### Used Bitzer 4DC-7.2Y-40S Condensing unit

Used Bitzer condensing unit on Freon. Complete with a Bitzer 4DC-7.2Y-40S semi-hermetic reciprocating compressor, Bitzer F152H liquid receiver with a volume of 15 liter, condenser with 2 Ziehl-Abegg FB045-4EK.4F.6L fans - 50/60 Hz - 0,41/0,57 kW - 1320/1520 RPM - diameter 450 mm, pressure and safety switches, liquid line filter drier and a sight glass. The compressor has a displacement of 26,9 m<sup>3</sup>/h at 50 Hz & 32,4 m<sup>3</sup>/h at 60 Hz.




\*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we solely deliver our orders after performing an extensive test and an industrial cleaning. If requested we are happy to



Your partner for used commercial and  
industrial refrigeration equipment

---

arrange your logistics.

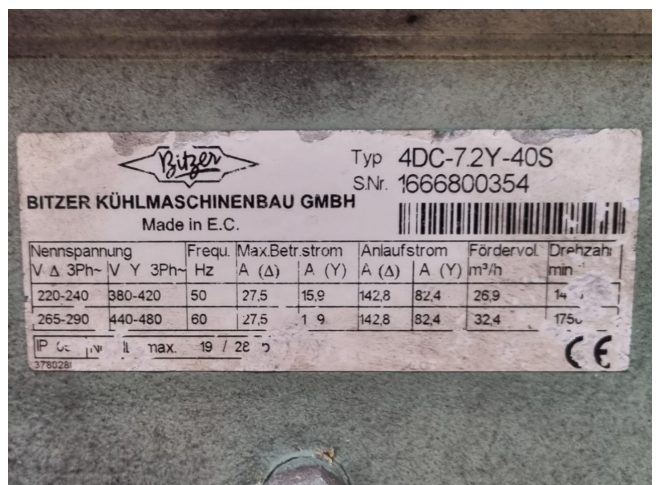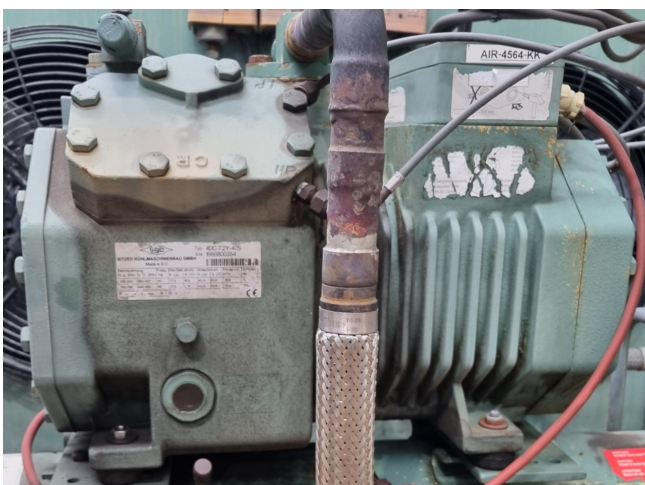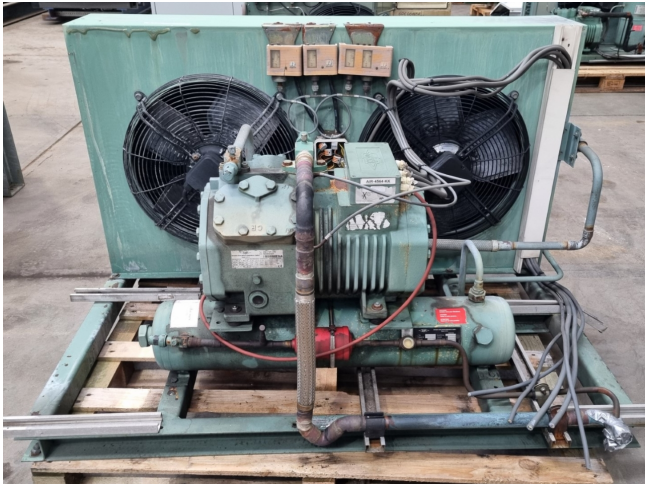

Typ 4DC-7.2Y-40S  
SNr. 1666800354

**BITZER KÜHLMASCHINENBAU GMBH**  
Made in E.C.

Nennspannung	Frequ.	Max.Betr.strom	Anlaufstrom	Fördervol.	Drehzahl
V Δ 3Ph- V Y 3Ph-	Hz	A (Δ) A (Y)	A (Δ) A (Y)	m³/h	min
220-240	380-420	50 27.5 15.9	142.8 82.4	26.9	14
265-290	440-480	60 27.5 19.9	142.8 82.4	32.4	1750

P 1 max. 19 / 28 °C



