Bitzer 4N-20.2Y-40P (x1) & 4N-20.2 Y (x1)

Specifications

Brand	Bitzer
Type	4N-20.2Y-40P (x1) & 4N-20.2 Y (x1)
Refrigerant	Freon
kW at 0ºC/+40ºC	91,6
kW at -5ºC/+40ºC	76,2
kW at -10ºC/+40ºC	62,6
kW at -20ºC/+40ºC	40,8
kW at -30ºC/+40ºC	24,8
kW at -40ºC/+40ºC	12,8
Capacity Control	✓
On steel base frame	✓
Pressure safety switches Hp/Lp/Op	✓
Liquid receiver	✓
Liquid receiver ltr.	89 l
Liquid line filter drier	✓
Sight Glass	✓
m3 / h	50 Hz - 112,2 m³/h
Remarks |	Y.o.b. 2004 (s.nr: 1666801294) & y.o.b. 1999 (s.nr: 65660437)
Sizes	1820x1300x1030 mm (LxWxH)
Stock	1

Description

Used Bitzer 4N-20.2Y-40P (x1) & 4N-20.2 Y (x1)

Used Bitzer 4N-20.2Y-40P (x1) & 4N-20.2 Y (x1) semi-hermetic reciprocating compressor rack on Freon. Complete with a Bitzer F 902 N liquid receiver with a volume of 89 liters, pressure safety switches and liquid line filter drier. The compressors have a total displacement of 112,2 m³/h at 50 Hz.
*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.
*Optional we can also perform a new paint job and arrange the logistics.

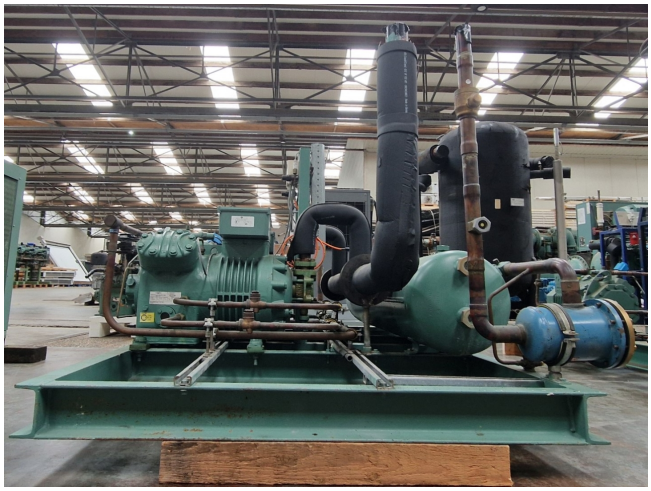

Bitzer
Typ 4N-20.2Y-40P
S.Nr. 1666801294
BITZER KÜHLMASCHINENBAU GMBH
Made in E.C.
Nennspannung V 3Ph~ | Frequ. Hz | Betr.strom A (max.) | Anlaufstrom A (Y) | A (YY) | Fördervol. m³/h | Drehzahl min⁻¹
380-420 | 50 | 37 | 97 | 158 | 56,1 | 1450
460 | 60 | 37 | 97 | 158 | 67,7 | 1750
IP 54 | ND/HD max. 19 / 28 bar
CE
37802805

Typ 4N-20.2 Y
S.Nr. 65660437
BITZER KÜHLMASCHINENBAU GMBH
Made in E.C.
65660437
Nennspannung V 3Ph~ | Frequ. Hz | Betr.strom A (max.) | Anlaufstrom A (Y) | Anlaufstrom A (YY) | Fördervol. m³/h | Drehzahl min⁻¹
380-420 | 50 | 37 | 97 | 158 | 56,1 | 1450
IP 54
ND/HD max. 19 / 25 bar
378 028-05

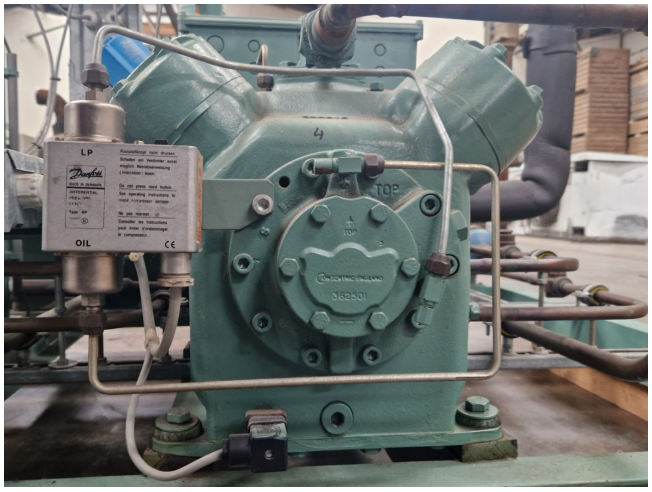

BITZER KÜHLMASCHINENBAU GMBH
Made in E.C.
Typ F 902 N 15616722 Serien-Nr.
Jahr 1999 Medium
Volumen 89 l Baumuster
Betriebstemp. 120 °C bar Prüfüberdruck
Zul. Betriebsüberdruck 28 bar