


Bitzer 4T-12.2

Specifications

| | |
|--------------------------|-----------------------------|
| Brand | Bitzer |
| Type | 4T-12.2 |
| Refrigerant | Freon |
| kW at 0°C/+40°C | 32,7 |
| kW at -5°C/+40°C | 27,1 |
| kW at -10°C/+40°C | 22,3 |
| kW at -20°C/+40°C | 14,6 |
| kW at -30°C/+40°C | 8,9 |
| kW at -40°C/+40°C | 4,8 |
| On steel base frame | ✓ |
| Pressure safety switches | ✓ |
| Hp/Lp/Op | |
| Pressure gauges | ✓ |
| Hp/Lp/Op | |
| Liquid receiver | ✓ |
| Liquid receiver ltr. | 35 |
| Oil separator | ✓ |
| Liquid line filter drier | ✓ |
| Sight Glass | ✓ |
| m ³ / h | 39,4 |
| Sizes | 1300x590x1380 mm (LxWxH) |
| Stock | 1 |

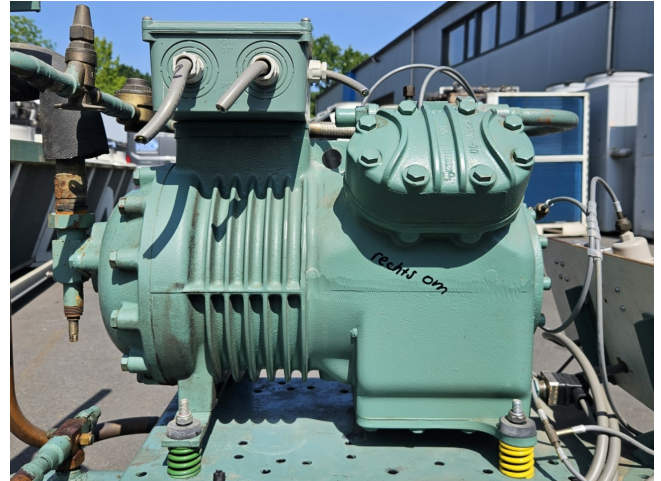

Description

Used Bitzer 4T-12.2

Used Bitzer 4T-12.2Y-40P unit on Freon. Complete with a Bitzer 4T-12.2Y-40P semi-hermetic reciprocating compressor, liquid receiver, oil separator and sight glass on a steel base frame. The compressor has a displacement of 50 Hz at 39,36 m³/h and 60 Hz at 47,5 m³/h.

*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.

*Optional we can also perform a new paint job and arrange the logistics.

