Bitzer 4T-12.2Y-40P

Specifications

Brand	Bitzer
Type	4T-12.2Y-40P
Refrigerant	Freon
kW at 0ºC/+40ºC	32,7
kW at -5ºC/+40ºC	27,1
kW at -10ºC/+40ºC	22,3
kW at -20ºC/+40ºC	14,6
kW at -30ºC/+40ºC	8,9
kW at -40ºC/+40ºC	4,8
kW at -45ºC/+40ºC	3,2
Unloaded Start	✓
Capacity Control	✓
Sight Glass	✓
Solenoid Valve	✓
m3 / h	39,4 m³/h at 50 Hz & 47,5 m³/h at 60 Hz
Remarks |	Y.o.b. 2008
Weight in kg.	146
Sizes	700x540x490 mm (LxWxH)
Stock	1

Description

Used Bitzer 4T-12.2Y-40P

Used Bitzer 4T-12.2Y-40P semi-hermetic reciprocating compressor on Freon. Complete with unloaded start, capacity control and a sight glass. The compressor has a displacement of 39,4 m³/h at 50 Hz & 47,5 m³/h at 60 Hz. *Why choose for HOSBV? We are not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and an industrial cleaning. *Optionally we can also perform a new paint job and arrange the logistics.

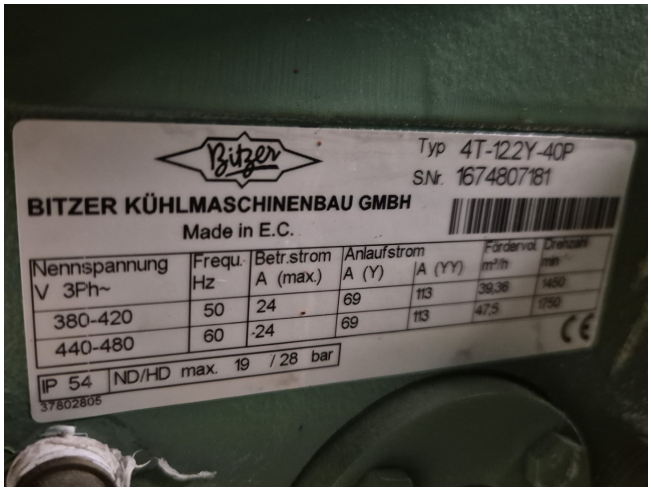
Bitzer
Typ 4T-12.2Y-40P
S.Nr. 1674807181
BITZER KÜHLMASCHINENBAU GMBH
Made in E.C.
Nennspannung V 3Ph~
Frequ. Hz
Betr.strom A (max.)
Anlaufstrom A (Y)
A (YY)
Fördervol. m³/h
Drehzahl min⁻¹
380-420
50
24
69
113
39.36
1450
440-480
60
24
69
113
47.5
1750
IP 54
ND/HD max. 19 / 28 bar
37802805