

Bitzer 6F-40.2Y-40P

Specifications

Brand	Bitzer
Type	6F-40.2Y-40P
Refrigerant	Freon
kW at -5°C/+40°C	100,9
kW at -10°C/+40°C	83,1
kW at -20°C/+40°C	54,3
kW at -30°C/+40°C	33,0
kW at -40°C/+40°C	17,6
Unloaded Start	✓
On steel base frame	✓
Pressure safety switches	✓
Hp/Lp/Op	
Pressure gauges	✓
Hp/Lp/Op	
Condensing pressure switches	✓
Liquid receiver	✓
Liquid receiver ltr.	160
Sight Glass	✓
Solenoid Valve	✓
Control panel	✓
m ³ / h	151,6 m ³ /h at 50 Hz & 183 m ³ /h at 60 Hz
Remarks	Y.o.b. 2007
Sizes	1750x800x1850 mm (LxWxH)
Stock	1




Description

Used Bitzer 6F-40.2Y-40P

Used Bitzer 6F-40.2Y-40P semi-hermetic reciprocating compressor on Freon. Complete with unloaded start, Bitzer F1602N liquid receiver with a volume of 160 liter, pressure and safety switches/gauges and a control cabinet. The compressor has a displacement of 151,6 m³/h at 50 Hz & 183 m³/h at 60 Hz.

*Why choose for HOSBV? We are not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and an industrial cleaning. *Optionally we can also perform a new paint job and arrange the logistics.

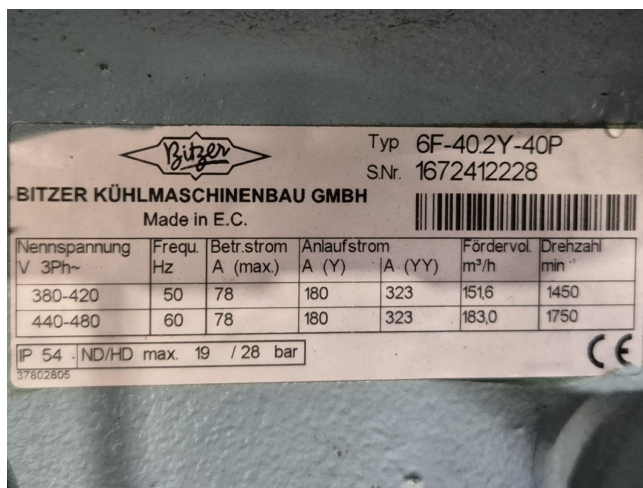

Typ 6F-40.2Y-40P

S.Nr. 1672412228

BITZER KÜHLMASCHINENBAU GMBH

Made in E.C.

Nennspannung V 3Ph~	Frequ. Hz	Betr.strom A (max.)	Anlaufstrom A (Y)	A (YY)	Fördervol. m³/h	Drehzahl min⁻¹
380-420	50	78	180	323	151,6	1450
440-480	60	78	180	323	183,0	1750

IP 54 ND/HD max. 19 / 28 bar

BRUNNEN

