


Bitzer 4Z-8.2

Specifications

| | |
|-----------------------|---------------------------|
| Brand | Bitzer |
| Type | 4Z-8.2 |
| Refrigerant | Freon |
| kW at 0°C/+40°C | 23,0 |
| kW at -5°C/+40°C | 19,0 |
| kW at -10°C/+40°C | 15,5 |
| kW at -20°C/+40°C | 10,0 |
| kW at -30°C/+40°C | 5,8 |
| kW at -40°C/+40°C | 2,9 |
| kW at -45°C/+40°C | 1,8 |
| Unloaded Start | ✓ |
| Capacity Control | ✓ |
| Oil level system AC&R | ✓ |
| Sight Glass | ✓ |
| m ³ / h | 28,1 |
| Weight in kg. | 140 |
| Sizes | 700x540x450 mm (LxWxH) |
| Stock | 1 |

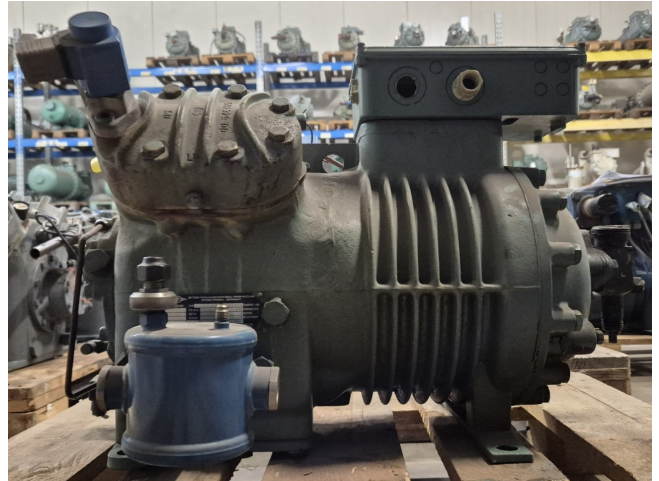

Description

Used Bitzer 4Z-8.2

Used Bitzer 4Z-8.2 semi-hermetic reciprocating compressor on Freon with unloaded start and capacity control. The compressor has a displacement of 28,1 m³/h.

*Why choose for HOSBV? We are not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and an industrial cleaning. *Optionally we can also perform a new paint job and arrange the logistics.

