

Bock F5 (x4)

Specifications

Brand	Bock
Type	F5 (x4)
Refrigerant	Freon
kW at +10°C/+40°C	333.32
kW at 0°C/+40°C	237.6
kW at -5°C/+40°C	196.60
kW at -10°C/+40°C	160.04
kW at -20°C/+40°C	99.79
kW at -30°C/+40°C	55.92
kW at -40°C/+40°C	27.56
kW at -45°C/+40°C	18.88
Electromotor Specs	15
On steel base frame	✓
Pressure safety switches	✓
Hp/Lp/Op	
Pressure gauges	✓
Hp/Lp/Op	
Liquid receiver	✓
Oil separator	✓
Liquid line filter drier	✓
Remarks	# // 1x Electromotor missing // Electromotor: 15 kW at 1460 RPM // Pulley EM: 230 / Pulley Compr: 230
Remarks	R404a - R22 or other freon types






Your partner for used commercial and
industrial refrigeration equipment

Package / Rack	✓
Sizes	4200x1500x2200 mm (LxWxH)
Stock	1

Description

Used Bock F5 (x4)

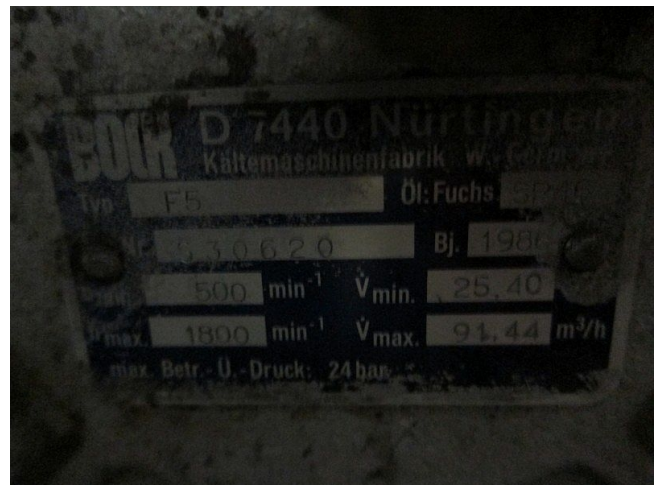

R404A/R507		Performance data										1.450 rpm	
Type	Cond. temp. °C	Cooling capacity Q ₀ [kW]										Power P [kW]	
		Evaporating temperature °C											
		10	5	0	-5	-10	-15	-20	-25	-30	-35	-40	-45
FX2	Q	13423	11418	9621	8020	6606	5366	4290	3366	2584	1933	1402	979
	P	2,21	2,19	2,13	2,05	1,94	1,80	1,65	1,48	1,31	1,12	0,94	0,75
	Q	11561	9785	8201	6797	5562	4485	3555	2761	2092	1537	1085	724
	P	2,65	2,56	2,44	2,30	2,13	1,95	1,76	1,55	1,34	1,12	0,91	0,70
	Q	9652	8113	6749	5548	4500	3593	2816	2159	1609	1157	791	517
FX3	P	3,03	2,88	2,71	2,51	2,30	2,07	1,83	1,59	1,34	1,10	0,86	0,66
	Q	28402	24165	20377	17011	14041	11442	9187	7231	5608	4231	3096	2175
	P	3,92	3,97	3,84	3,63	3,44	3,17	2,88	2,56	2,23	1,90	1,57	1,27
	Q	24498	20763	17437	14495	11911	9657	7710	6042	4628	3442	2458	1650
	P	4,97	4,85	4,66	4,41	4,11	3,77	3,40	3,01	2,61	2,21	1,83	1,46
FX4	Q	20584	17356	14498	11985	9791	7889	6254	4860	3680	2690	1862	1272
	P	5,90	5,62	5,38	4,89	4,47	4,02	3,56	3,08	2,61	2,15	1,72	1,29
	Q	53909	45836	38585	32117	26393	21373	17019	13292	10151	7559	5476	3862
	P	8,34	8,30	8,09	7,73	7,25	6,68	6,04	5,36	4,66	3,96	3,29	2,69
	Q	46772	39538	33069	27326	22370	17862	14063	10834	8135	5928	4173	2832
FX5	P	10,09	9,75	9,27	8,67	7,98	7,21	6,41	5,59	4,78	4,00	3,27	2,63
	Q	39157	32814	27179	22214	17880	14137	10946	8268	6064	4295	2922	1957
	P	11,44	10,83	10,10	9,28	8,40	7,47	6,53	5,59	4,69	3,85	3,09	2,38
	Q	95654	81844	69253	57854	47620	38522	30533	23624	17768	12938	9105	6242
	P	12,98	13,48	13,55	13,24	12,62	11,75	10,69	9,49	8,22	6,94	5,70	4,57
FX14/1166	Q	83330	70784	59401	49154	40014	31955	24949	18967	13861	9905	6890	4728
	P	16,87	16,64	16,05	15,16	14,03	12,72	11,28	9,79	8,29	6,99	5,95	4,99
	Q	70477	59251	49163	40194	32258	25245	19428	14480	10472	7377	5168	3568
	P	20,21	19,31	18,12	16,70	15,11	13,41	11,67	9,93	8,26	6,73	5,38	4,39
	Q	131605	112604	95261	79598	65518	53000	42008	32923	24447	17801	12317	8587
FX14/1366	P	17,86	18,55	18,64	18,22	17,37	16,17	14,71	13,06	11,32	9,55	7,85	6,29
	Q	114950	97388	81727	67628	55054	43966	34326	26096	19237	13711	9480	6506
	P	23,21	22,89	22,08	20,86	19,30	17,49	15,32	13,47	11,41	9,43	7,61	6,04
	Q	96896	81521	67658	55301	44382	34871	26730	19922	14408	10150	7110	4900
	P	27,80	26,56	24,92	22,97	20,79	18,45	16,05	13,66	11,37	9,25	7,40	5,95
FX14/1366	Q	154448	132149	111819	93414	76889	62199	49299	38414	28690	20890	14071	10078
	P	20,96	21,11	20,58	19,78	18,68	17,26	15,33	13,28	11,11	9,21	7,40	5,95
	Q	134550	114291	95912	79366	64609	51597	40248	30625	22501	16101	11125	7635