Frigoscandia GC 42-10-24-06 NS HHT Spiral freezer

Specifications

Brand	Frigoscandia
Type	GC 42-10-24-06 NS HHT Spiral freezer
Capacity	231
Refrigerant	Freon / NH3
Sizes	8000x2650x4170 mm (LxWxH)
Stock	1

Description

Used Frigoscandia GC 42-10-24-06 NS HHT Spiral freezer

Frigoscandia GyroCompact GC 42-10-24-06 NS HHT // Stages: 20 // Belt Width: 420- mm // Belt Lenght: 345,6 m // Long over floor: 6,8m // Belt speed high: 2,5-25 / 1,5-13 Low // Product Clearance: 100 mm // 1x Evaporator // includes Owners manual & Complete manual set // steel coils (for nh3 and freon usage)

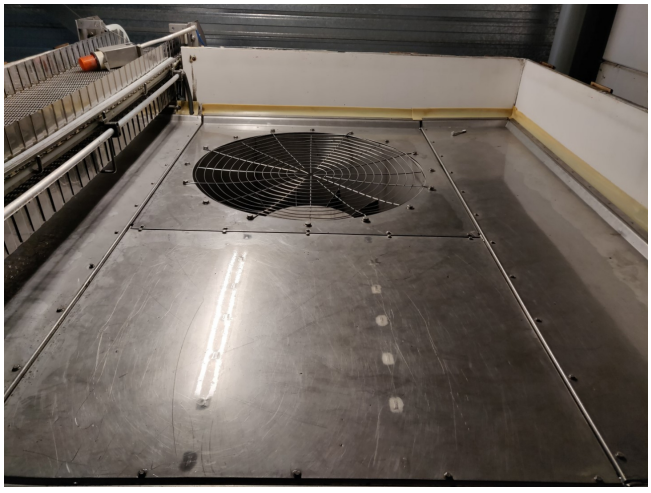

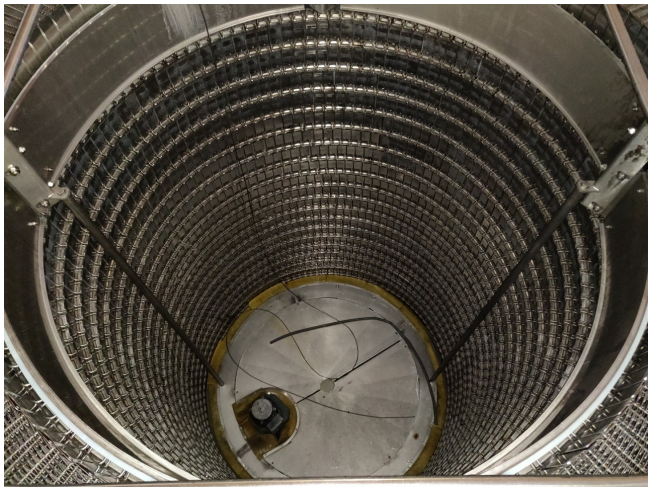

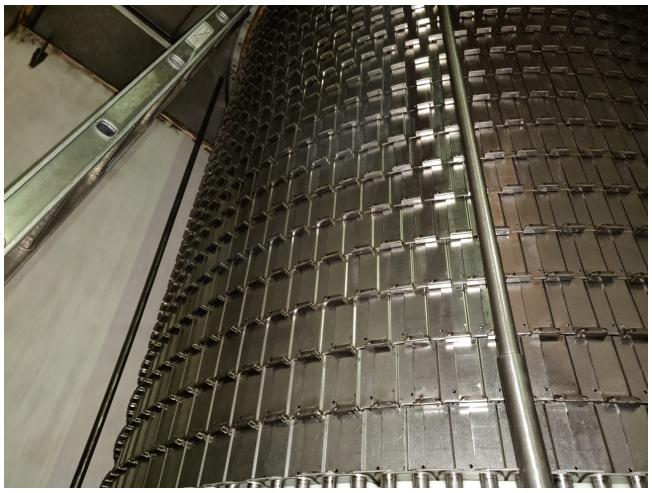

EURODRIVE Jönköping/Sweden
kW
r/min
kg

SEW-EURODRIVE Bruchsal / Germany
Typ RF73 DT90L4
Nr. 315145 5202.0001.98
kW 1.5 / 1.5 / S1
50Hz V220-240 Δ / 380-415 YA 6.40 / 3.70
60Hz V240-266 Δ / 415-460 YA 5.80 / 3.35
r/min 1410 / 16 / 1710 / 20
Nm
Bremse V
Kg 52.260 Ma 600 / 730 Nm
IP 54
Gleichrichter
I 87.38
Schmierstoff CLP 220 SYNTHETIC OIL Made in Germany

EURODRIVE Jönköping/Sweden

ALARM

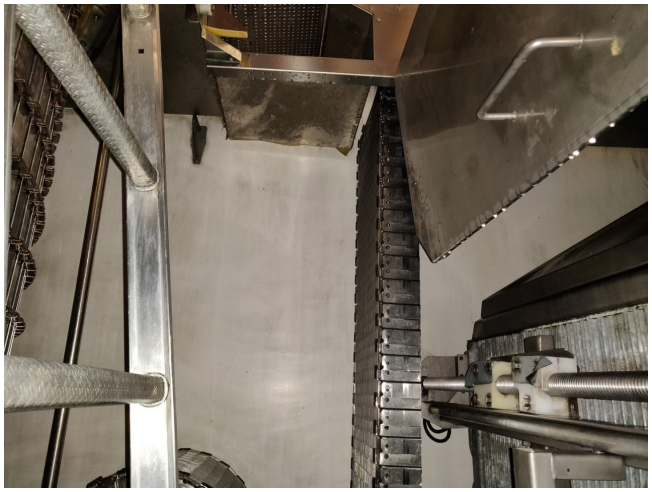

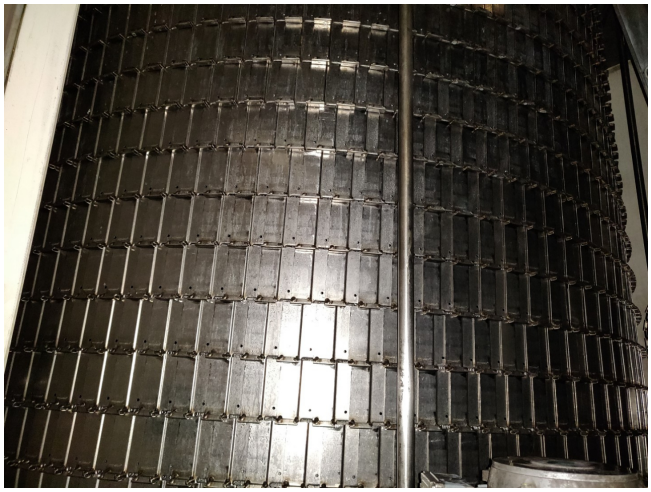

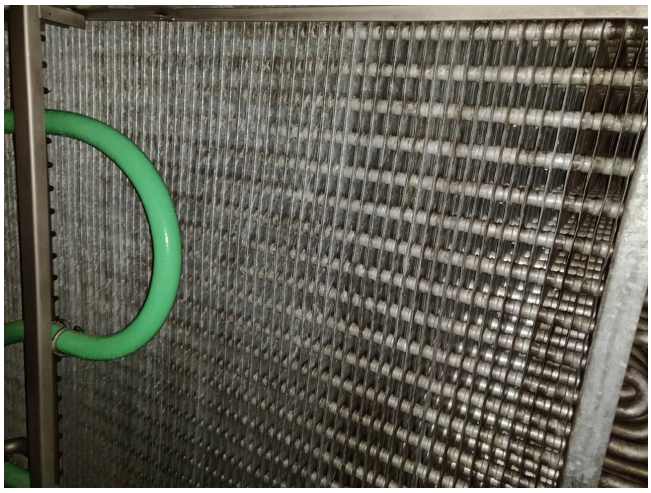

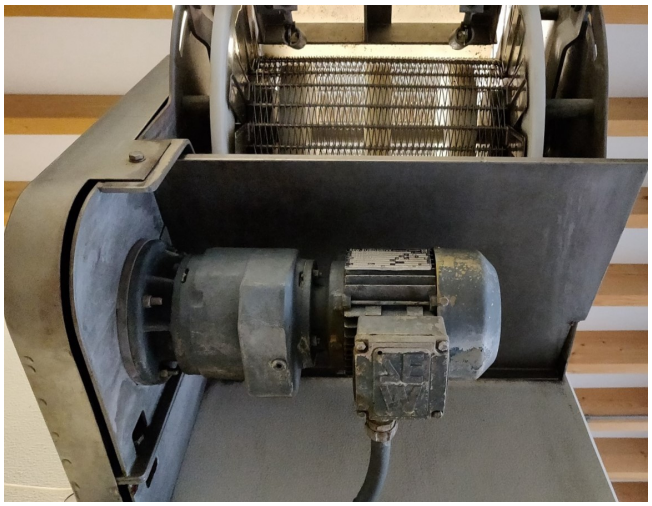

ABB Motors
Motor
IEC 34-1 (1989)
Hz
No.
kW
r/min
Cl.
cos φ
V Y
V Δ
A
A
Cat. no
IP
kg

GYRoCOMPACT

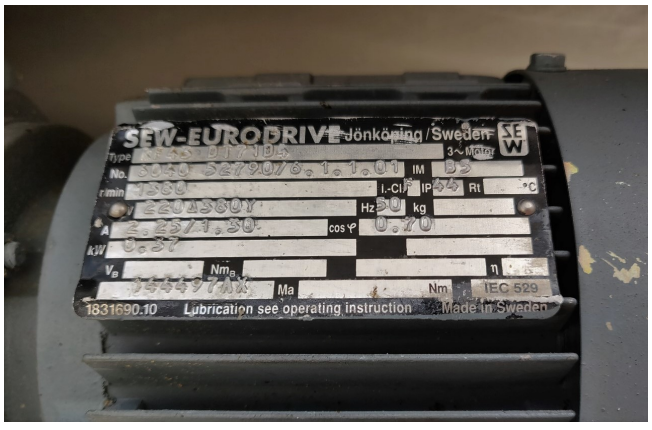
SEW-EURODRIVE
Jönköping / Sweden
3~ Motor
IM
B3
I.-Cl.
IP
Rt
°C
Hz
kg
cos φ
kW
Nm
η
Ma
Nm
IEC 529
1831690.10
Lubrication see operating instruction
Made in Sweden

SEW-EURODRIVE Jönköping / Sweden
1831690.10 Lubrication see operating instruction Made in Sweden

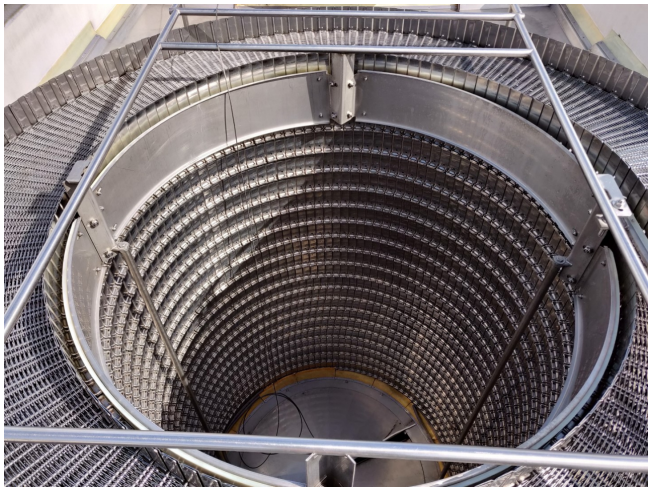

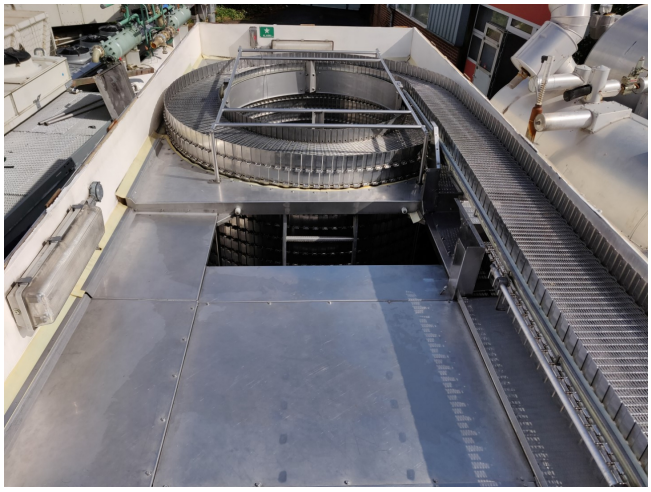

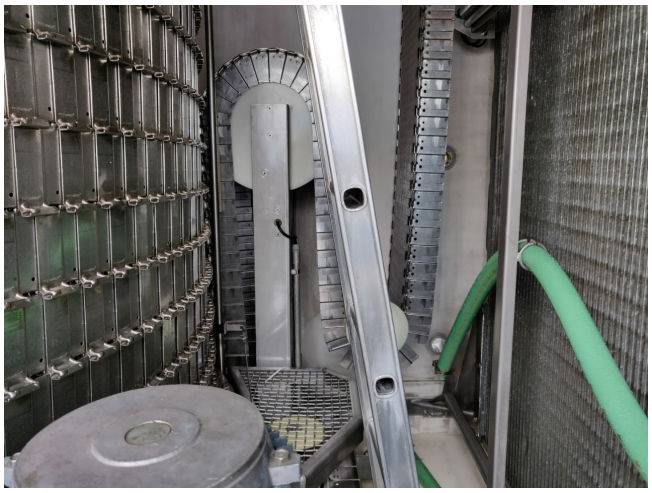

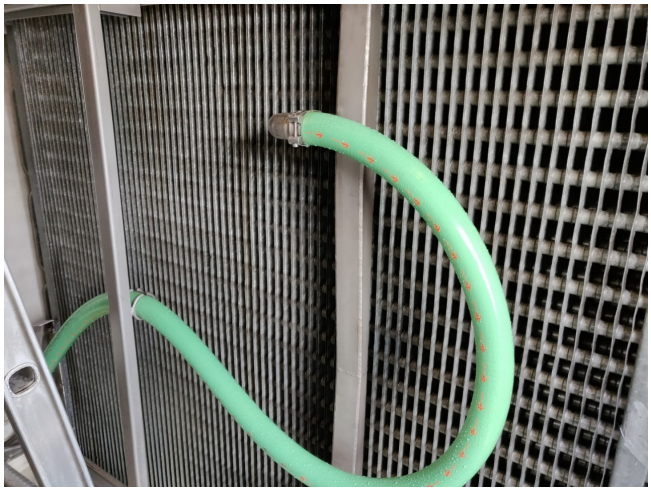

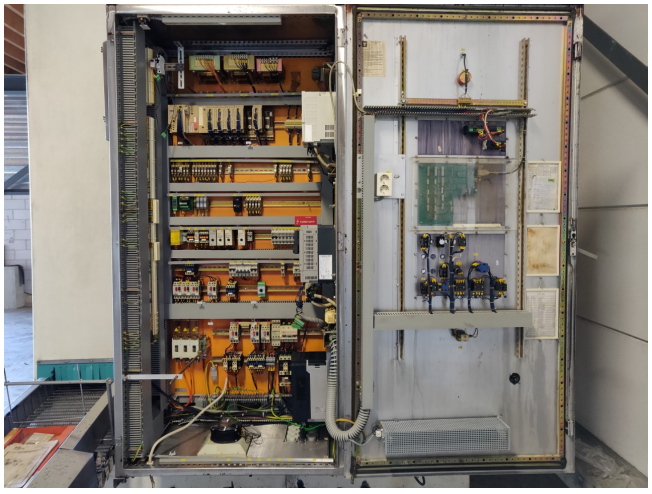

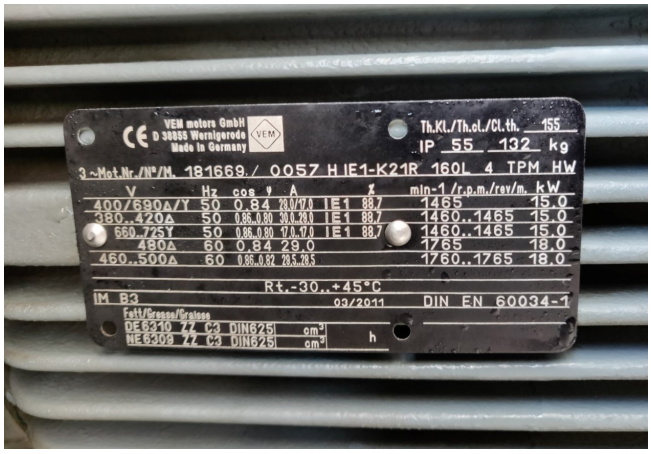
VEM motors GmbH
D 38855 Wernigerode
Made in Germany
Th.Kl./Th.cl./Cl.th. 155
IP 55 132 kg
3~Mot.Nr./N°/M. 181669./ 0057 H IE1-K21R 160L 4 TPM HW
V Hz cos φ A % min-1 /r.p.m./rev/m. kW
400/690Δ/Y 50 0.84 IE1 88.7 1465 15.0
380..420Δ 50 IE1 88.7 1460..1465 15.0
660..725Y 50 IE1 88.7 1460..1465 15.0
480Δ 60 0.84 29.0 1765 18.0
460..500Δ 60 1760..1765 18.0
Rt.-30..+45°C
IM B3
03/2011
DIN EN 60034-1
Fett/Graisse/Grease
DE 6310 ZZ C3 DIN625 cm³
NE 6309 ZZ C3 DIN625 cm³
h

TOSHIBA
VF-S11
RUN
STOP

FRIGOSCANDIA
EQUIPMENT
PATENTED
GYRoCOMPACT®
MODEL: 42
NO: 2610006
FRIGOSCANDIA
FREEZER
CE

SEW-EURODRIVE Jönköping/Sweden
SEW
3~Motor
IM
I.-Cl.
Hz 50 kg
220D380Y
6.50/3.75
cos φ 0.81
1.50
Nm
IEC 529
Lubrication see operating instruction
Made in Sweden

Altivar 71

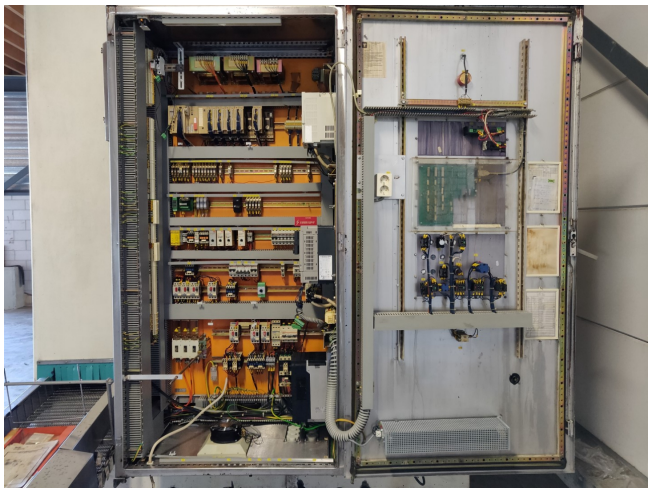

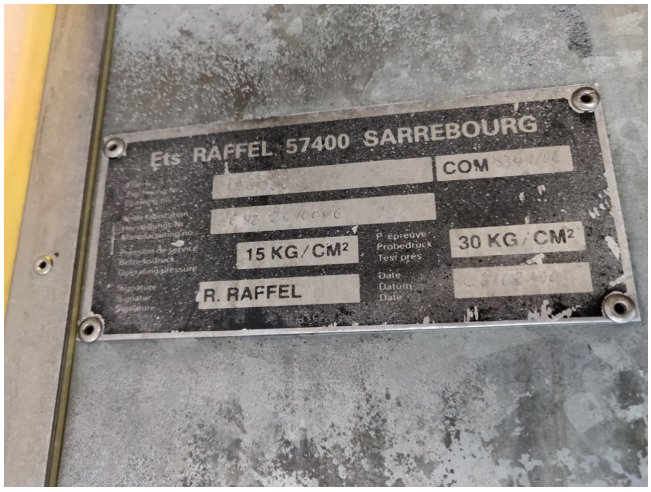
Ets RAFFEL 57400 SARREBOURG
COM
15 KG/CM²
30 KG/CM²
R. RAFFEL

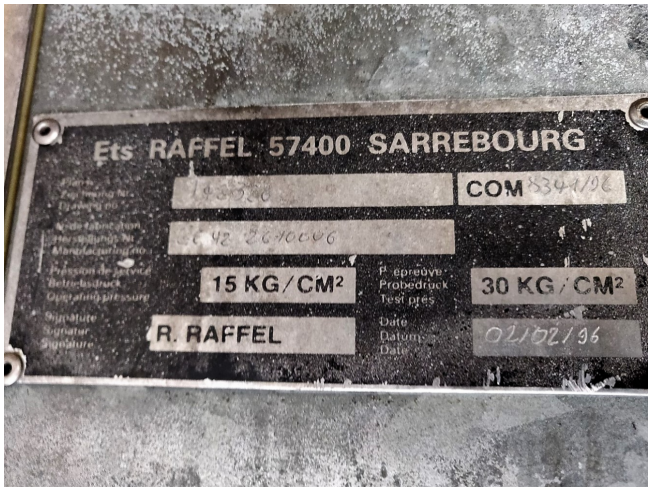
Ets RAFFEL 57400 SARREBOURG
COM
15 KG/CM²
30 KG/CM²
R. RAFFEL

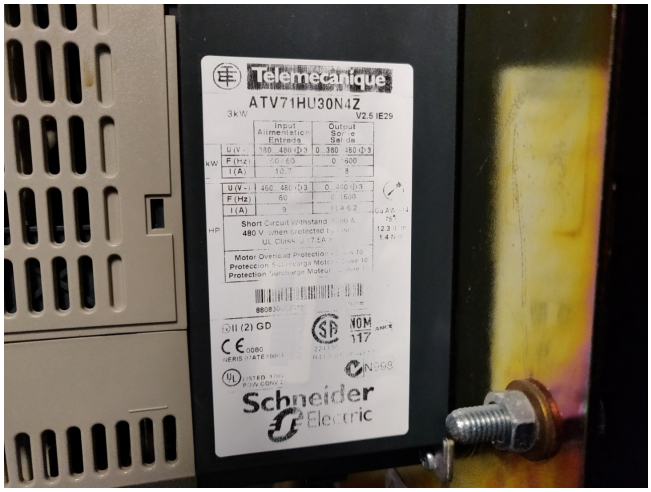
Telemecanique
ATV71HU30N4Z
Schneider Electric

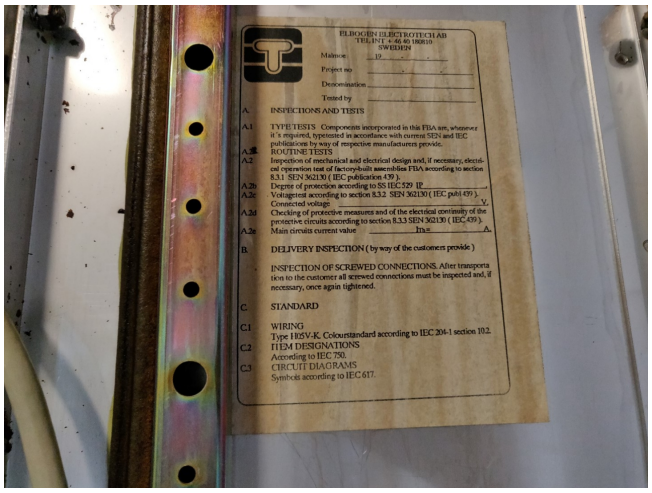
ELBOGEN ELECTROTECH AB
SWEDEN
INSPECTIONS AND TESTS
TYPE TESTS
ROUTINE TESTS
DELIVERY INSPECTION (by way of the customers provide)
INSPECTION OF SCREWED CONNECTIONS. After transportation to the customer all screwed connections must be inspected and, if necessary, once again tightened.
STANDARD
WIRING
Type H05V-K. Colourstandard according to IEC 204-1 section 10.2.
ITEM DESIGNATIONS
According to IEC 750.
CIRCUIT DIAGRAMS
Symbols according to IEC 617.

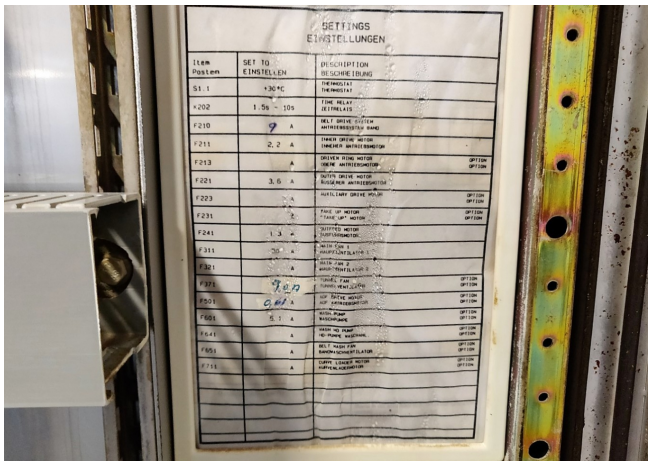
SETTINGS
EINSTELLUNGEN
Item
Posten
SET TO
EINSTELLEN
DESCRIPTION
BESCHREIBUNG

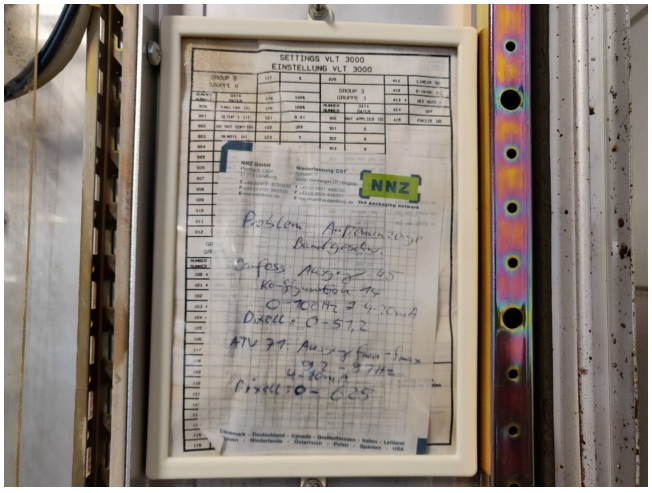
SETTINGS VLT 3000
EINSTELLUNG VLT 3000
NNZ

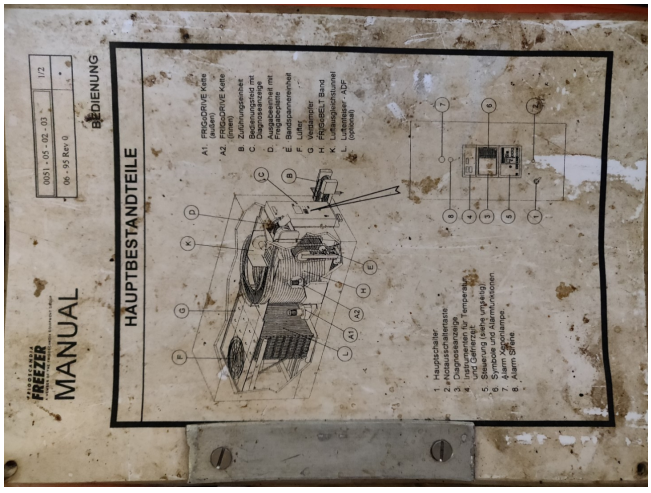
BEDIENUNG
HAUPTBESTANDTEILE
MANUAL
FREEZER