

DWM DLLP-40X-EWL

Specifications


| | |
|-------------------|---|
| Brand | DWM |
| Type | DLLP-40X-EWL |
| Refrigerant | Freon |
| kW at 0°C/+40°C | 15.27 |
| kW at -5°C/+40°C | 12.56 |
| kW at -10°C/+40°C | 10.20 |
| kW at -20°C/+40°C | 6.42 |
| kW at -30°C/+40°C | 3.70 |
| kW at -40°C/+40°C | 1.82 |
| kW at -45°C/+40°C | 1.13 |
| m3 / h | 18.2 |
| Remarks | Our capacity table is based on Manufacturer spec. We would like to know which refrigerant is in your system |
| Weight in kg. | 93 |
| Stock | 1 |



Description

Used DWM DLLP-40X-EWL

Used DWM - Copeland Model: DLLP 40X EWL Semi-hermetic piston compressor. You can also use this compressor on alternative types of Freon. For all the other specs, see the picture of the manufacturer model plate or the attached pdf file (if available) *Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning. *Optional we can also arrange the logistics.

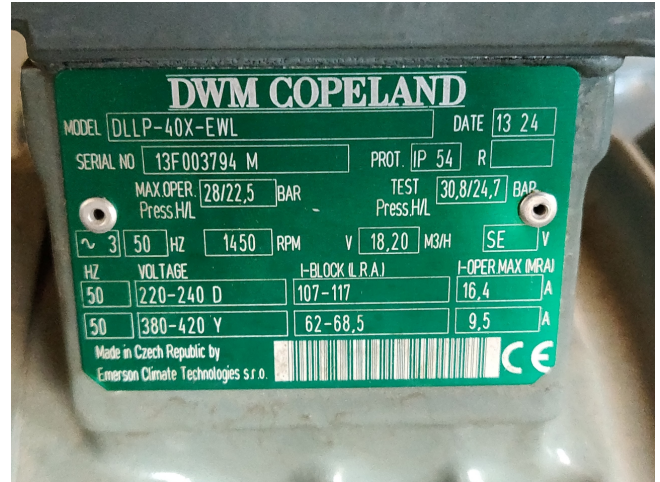

Model: DLL-40 X
Capacity

R404A/R507

Cooling capacity [kW]

| t _c \ t _e | -45 | -40 | -35 | -30 | -25 | -20 | -15 | -10 | -5 | 0 | 5 |
|---------------------------------|------|------|------|------|------|------|-------|-------|-------|-------|-------|
| 20 | 2.26 | 3.15 | 4.26 | 5.61 | 7.23 | 9.15 | 11.39 | 13.99 | 16.97 | 20.37 | 24.20 |
| 25 | 1.97 | 2.82 | 3.86 | 5.13 | 6.66 | 8.47 | 10.59 | 13.06 | 15.89 | 19.11 | 22.76 |
| 30 | 1.69 | 2.48 | 3.46 | 4.66 | 6.09 | 7.79 | 9.79 | 12.11 | 14.79 | 17.84 | 21.31 |
| 35 | 1.41 | 2.15 | 3.07 | 4.18 | 5.52 | 7.11 | 8.98 | 11.16 | 13.68 | 16.56 | 19.84 |
| 40 | 1.13 | 1.82 | 2.67 | 3.70 | 4.94 | 6.42 | 8.16 | 10.20 | 12.56 | 15.27 | 18.36 |
| 45 | 0.86 | 1.50 | 2.27 | 3.22 | 4.36 | 5.72 | 7.34 | 9.23 | 11.43 | 13.97 | 16.86 |
| 50 | - | 1.17 | 1.88 | 2.74 | 3.78 | 5.03 | 6.51 | 8.25 | 10.29 | 12.65 | 15.36 |
| 55 | - | 0.86 | 1.49 | 2.26 | 3.20 | 4.33 | 5.67 | 7.27 | 9.15 | - | - |

Power input [kW]

| t _c \ t _e | -45 | -40 | -35 | -30 | -25 | -20 | -15 | -10 | -5 | 0 | 5 |
|---------------------------------|------|------|------|------|------|------|------|------|------|------|------|
| 20 | 1.64 | 1.88 | 2.14 | 2.39 | 2.63 | 2.87 | 3.08 | 3.27 | 3.43 | 3.56 | 3.64 |
| 25 | 1.60 | 1.86 | 2.13 | 2.41 | 2.67 | 2.93 | 3.17 | 3.38 | 3.57 | 3.72 | 3.83 |
| 30 | 1.56 | 1.85 | 2.15 | 2.45 | 2.75 | 3.04 | 3.31 | 3.56 | 3.77 | 3.96 | 4.10 |
| 35 | 1.50 | 1.83 | 2.17 | 2.51 | 2.84 | 3.17 | 3.48 | 3.77 | 4.03 | 4.26 | 4.45 |
| 40 | 1.40 | 1.77 | 2.16 | 2.55 | 2.93 | 3.31 | 3.67 | 4.01 | 4.32 | 4.60 | 4.84 |
| 45 | 1.24 | 1.67 | 2.11 | 2.55 | 2.99 | 3.42 | 3.84 | 4.24 | 4.61 | 4.95 | 5.25 |
| 50 | - | 1.49 | 1.99 | 2.49 | 3.00 | 3.50 | 3.98 | 4.45 | 4.89 | 5.30 | 5.67 |
| 55 | - | 1.21 | 1.78 | 2.36 | 2.94 | 3.51 | 4.07 | 4.62 | 5.13 | - | - |