Bitzer 4DC-5.2Y-40S (x1) / 4CC-6.2Y-40S (x1)

Specifications

Brand	Bitzer
Type	4DC-5.2Y-40S (x1) / 4CC-6.2Y-40S (x1)
Refrigerant	Freon
kW at -5ºC/+40ºC	38,8
kW at -10ºC/+40ºC	31,9
kW at -20ºC/+40ºC	20,9
kW at -30ºC/+40ºC	12,8
kW at -40ºC/+40ºC	6,78
kW at -45ºC/+40ºC	4,52
On steel base frame	✓
Pressure safety switches Hp/Lp/Op	✓
Control panel	✓
m3 / h	71,7
Remarks |	y.o.b. 2004
Package / Rack	✓
Sizes	1540x450x490 mm
Stock	1

Description

Used Bitzer 4DC-5.2Y-40S (x1) / 4CC-6.2Y-40S (x1)

Used Bitzer unit with 2 compressors, 4DC-5.2Y-40S and 4CC-6.2Y-40S. Complete with pressure safety switches and control panel.
*Why choose for HOSBV? Were not only the largest used refrigeration specialist in Europe, but also, we deliver all equipment including an extensive test, warranty and industrial cleaning.
*Optional we can also perform a new paint job and arrange the logistics.

Bitzer
Typ 4CC-6.2Y-40S
S.Nr. 1667103240
BITZER KÜHLMASCHINENBAU GMBH
Made in E.C.
Nennspannung V Δ 3Ph~ | V Y 3Ph~ | Frequ. Hz | Max.Betr.strom A (Δ) | A (Y) | Anlaufstrom A (Δ) | A (Y) | Fördervol. m³/h | Drehzahl min
220-240 | 380-420 | 50 | 27,5 | 15,9 | 141,8 | 82,4 | 32,5 | 1450
265-290 | 440-480 | 60 | 27,5 | 15,9 | 141,8 | 82,4 | 39,2 | 1750
IP 65 | ND/HD max. 19 / 28 bar
37802803
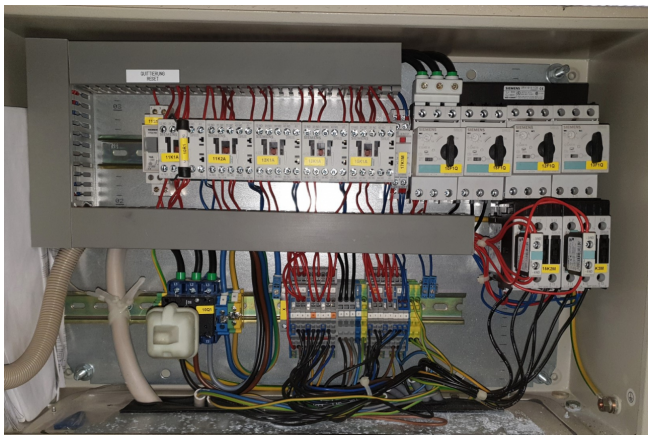
Bitzer
Typ 4DC-5.2Y-40S
S.Nr. 1667103229
BITZER KÜHLMASCHINENBAU GMBH
Made in E.C.
Nennspannung V Δ 3Ph~ | V Y 3Ph~ | Frequ. Hz | Max.Betr.strom A (Δ) | A (Y) | Anlaufstrom A (Δ) | A (Y) | Fördervol. m³/h | Drehzahl min
220-240 | 380-420 | 50 | 23,4 | 13,5 | 107,7 | 62,2 | 26,9 | 1450
265-290 | 440-480 | 60 | 23,4 | 13,5 | 107,7 | 62,2 | 32,4 | 1750
IP 65 | ND/HD max. 19 / 28 bar
37802803