

Mycom N6HK

Specifications

Brand	Mycom
Туре	N6HK
Refrigerant	NH 3 (ammonia)
kW at +10°C/+40°C	174,6
kW at 0°C/+40°C	112,4
kW at -5ºC/+40ºC	86,9
kW at -10°C/+40°C	65,3
On steel base frame	✓
Pressure safety switches	✓
Hp/Lp/Op	
Pressure gauges	✓
Hp/Lp/Op	
Condensing pressure	✓
switches	
Oil separator	/
Sight Glass	✓
Solenoid Valve	✓
Control panel	✓
m3 / h	212,5
Remarks	Y.o.b. 2008
Weight in kg.	1500
Sizes	1850x1200x1900 mm
	(LxWxH)
Stock	2



Description

Used Mycom N6HK

Good as new Mycom N6HK open type reciprocating compressor on NH3.

Complete with a Leroy Somer PLS250MP-T electromotor - 50 Hz - 90 kW - 1469 RPM, Mayekawa MAA 2565-40 oil separator with a volume of 58 liters, Danfoss VLT Compact Starter MCD 202 softstarter, control box and a Micro Innovation AG XVS-430-57MPI-1-10 display. This compressor is started, tested and dismantled.

*Why choose for HOSBV? We are not

*Why choose for HOSBV? We are not only the largest used refrigeration specialist in Europe, but also, we solely deliver our orders after performing an extensive test and an industrial cleaning. If requested we are happy to arrange your logistics.



Your partner for used commercial and industrial refrigeration equipment






















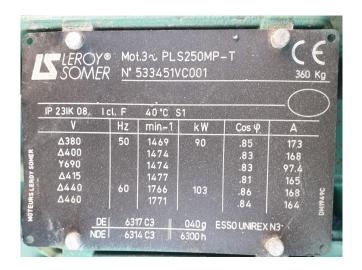





Your partner for used commercial and industrial refrigeration equipment











Your partner for used commercial and industrial refrigeration equipment



