

## Bock HGX4/555-4 S (x2)

### Specifications

Brand	Bock
Type	HGX4/555-4 S (x2)
Refrigerant	Freon
kW at 0°C/+40°C	77,2
kW at -5°C/+40°C	64,2
kW at -10°C/+40°C	52,6
kW at -20°C/+40°C	33,7
kW at -30°C/+40°C	20,1
kW at -40°C/+40°C	10,8
kW at -45°C/+40°C	7,5
Unloaded Start	✓
Capacity Control	✓
On steel base frame	✓
Pressure safety switches	✓
Hp/Lp/Op	
Pressure gauges	✓
Hp/Lp/Op	
Suction accumulator	✓
Oil separator	✓
Oil level system AC&R	✓
Liquid line filter drier	✓
Solenoid Valve	✓
m3 / h	88,4
Remarks	Y.o.b. 2006
Package / Rack	✓
Sizes	1760x1100x1500 mm (LxWxH)



Stock

1


---

## Description

### Used Bock HGX4/555-4 S (x2)

Used Bock HGX4/555-4 S (x2) semi-hermetic reciprocating Freon compressor rack on a steel base frame. Complete with a suction accumulator, 2 oil separators, Henry S-9109-CE oil reservoir, oil level regulator, pressure and safety switches/gauges. The compressor has a displacement of 88,4 m<sup>3</sup>/h.

\*Why choose for HOSBV? We're not only the largest used refrigeration specialist in Europe, but also, we solely deliver our orders after performing an extensive test and an industrial cleaning. If requested we are happy to arrange your logistics.

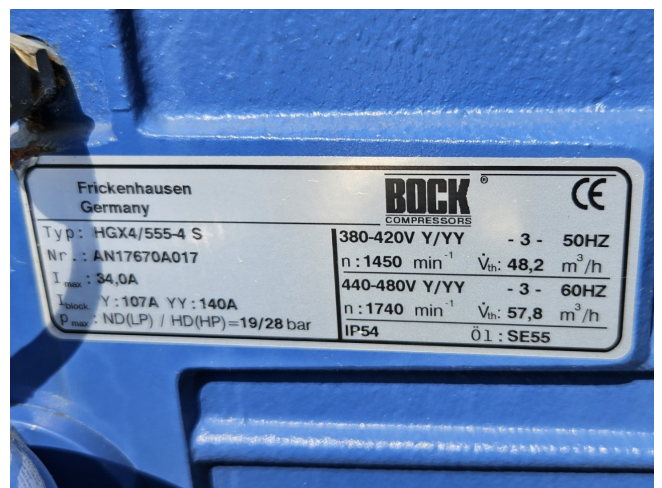

Frickenhausen Germany		<b>BOCK</b> COMPRESSORS	CE
Typ: HGX4/555-4 S		380-420V Y/YY	- 3 - 50HZ
Nr.: AN17670A017		n: 1450 min <sup>-1</sup>	V <sub>th</sub> : 48,2 m <sup>3</sup> /h
I <sub>max</sub> : 34,0A		440-480V Y/YY	- 3 - 60HZ
I <sub>block</sub> : Y: 107A YY: 140A		n: 1740 min <sup>-1</sup>	V <sub>th</sub> : 57,8 m <sup>3</sup> /h
P <sub>max</sub> : ND(LP) / HD(HP)=19/28 bar		IP54	Öl: SE55



