

Bock HGX4/555-4 S (x2)

Specifications

Marque	Bock
Le type	HGX4/555-4 S (x2)
Réfrigérant	Freon
kW at 0°C/+40°C	77,2
kW at -5°C/+40°C	64,2
kW at -10°C/+40°C	52,6
kW at -20°C/+40°C	33,7
kW at -30°C/+40°C	20,1
kW at -40°C/+40°C	10,8
kW at -45°C/+40°C	7,5
Démarrage à vide	✓
Contrôle de capacité	✓
Sur le châssis en acier	✓
Interrupteurs de sécurité	✓
de pression	
Manomètres	✓
Aspiration	✓
d'accumulateur	
Séparateur d'huile	✓
Système de niveau	✓
d'huile	
Liquid déshydrateur	✓
ligne	
Electrovanne	✓
m3 / h	88,4
Remarques	Y.o.b. 2006
Package / Rack	✓




Tailles	1760x1100x1500 mm (LxWxH)
Stock	1

Description

Used Bock HGX4/555-4 S (x2)

Used Bock HGX4/555-4 S (x2) semi-hermetic reciprocating Freon compressor rack on a steel base frame. Complete with a suction accumulator, 2 oil separators, Henry S-9109-CE oil reservoir, oil level regulator, pressure and safety switches/gauges. The compressor has a displacement of 88,4 m³/h.

*Why choose for HOSBV? We're not only the largest used refrigeration specialist in Europe, but also, we solely deliver our orders after performing an extensive test and an industrial cleaning. If requested we are happy to arrange your logistics.

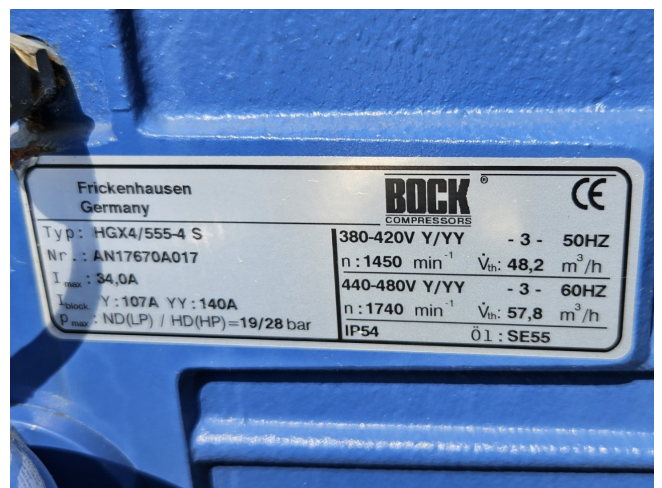

Frickenhausen Germany		BOCK COMPRESSORS	CE
Typ: HGX4/555-4 S		380-420V Y/YY	- 3 - 50HZ
Nr.: AN17670A017		n: 1450 min ⁻¹	V _{th} : 48,2 m ³ /h
I _{max} : 34,0A		440-480V Y/YY	- 3 - 60HZ
I _{block} : Y: 107A YY: 140A		n: 1740 min ⁻¹	V _{th} : 57,8 m ³ /h
P _{max} : ND(LP) / HD(HP)=19/28 bar		IP54	Öl: SE55



