

Roller FHVIT 743

Specifications




La marque	Roller
Type	FHVIT 743
Capacité kW	23,7
Réfrigérant	Freon
Nombre de ventilateurs	3
Espace Fan in mm	7
Dégivrage	Electric
m ³ /h	19 200
Tailles	3300x430x630 mm (LxWH)
Projet	*Capacity is based on 8K - 8°C // 169 kg
Stock	4





Description

Used Roller FHVIT 743

This used Roller FHVIT 743 uses Refrigerant: G2 and has 3x Fans: Roller / 400V / 50Hz / 0,50/0,34kW / 1,45/0,65A at 1370/1180 RPM

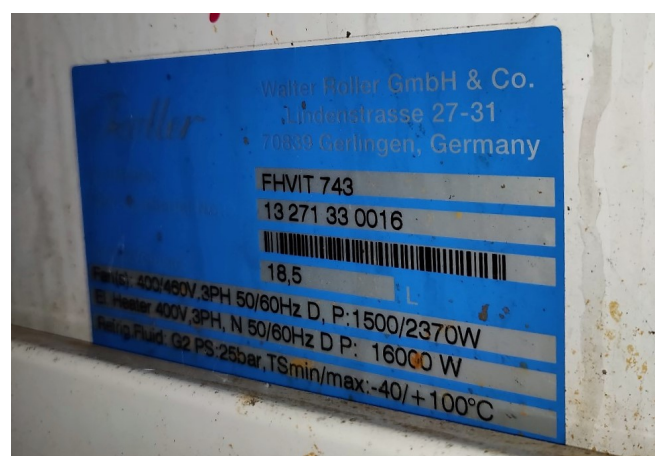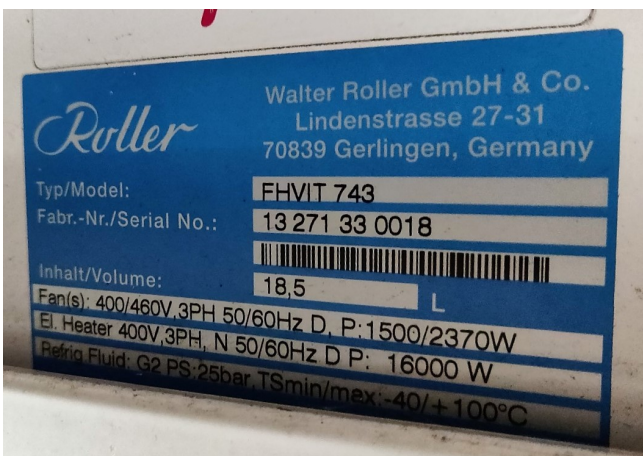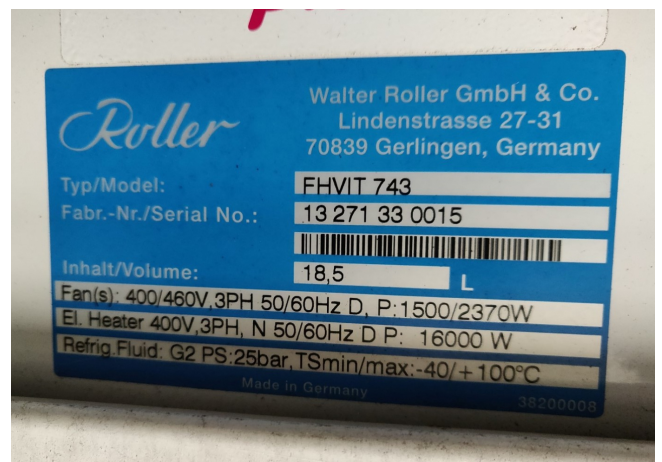

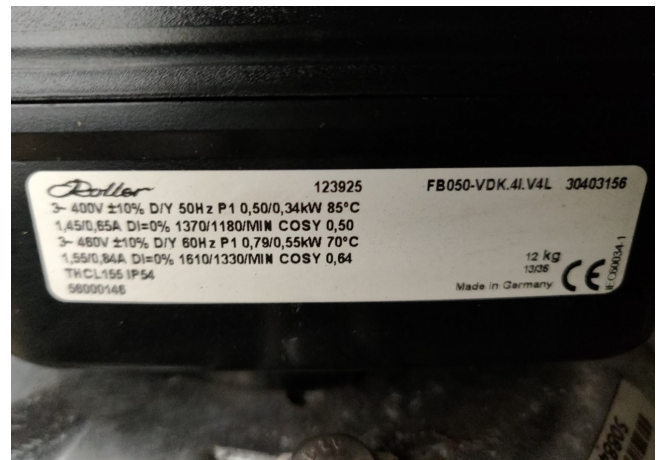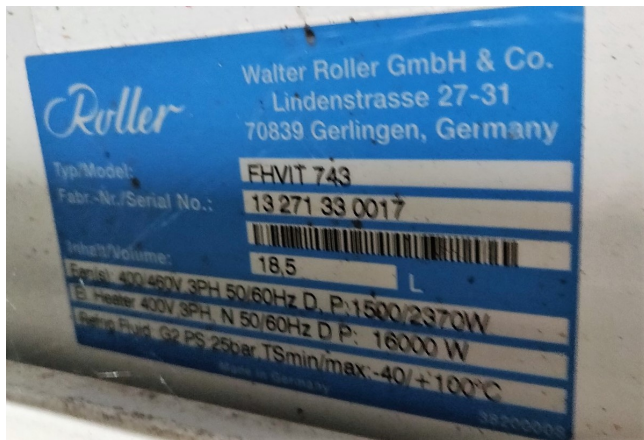

FHVI/T



Typ Model	Leistung Capacity Potencia		2014	Oberfläche Surface Superficie	Luftmenge Air flow Caudal de aire	Wärme Proyección Proyección	Wärme Air flow Proyección	Schallleistung Sound power level Potencia sonora	Schallleistung Sound pressure level Presión sonora	Anschlüsse Connections Conexiones	
	t _a = -8 °C DTI = 8 K	t _a = -25 °C DTI = 7 K								Eintritt Inlet Entrada	Austritt Outlet Salida
FHVI/T	kW	kW		m ²	m ³ /h	m	m	dBA	dBA(A)*	Ø mm*	Ø mm
441-444											
				Lamellenabstand 4,5 mm		Fin spacing 4,5 mm		Separación de aletas 4,5 mm			
FHVI 441	9,38	7,12	D	51,7	6.400	16	34	78	56	12	28
FHVI 441	12,4	9,1	D	77,5	6.200	15	33	78	56	12	28
FHVI 442	19,95	14,24	D	103,4	12.600	18	38	81	59	15	42
FHVI 442	24,79	18,2	D	155	12.400	17	37	81	59	15	42
FHVI 443	29,83	21,35	D	155	19.200	20	42	83	60	15	54
FHVI 443	37,91	27,05	C	232,6	18.600	19	41	83	60	15	54
FHVI 444	39,91	28,47	D	206,7	25.600	22	46	84	61	15	54

741-744											
				Lamellenabstand 7,0 mm		Fin spacing 7,0 mm		Separación de aletas 7,0 mm			
FHVI 741	7,9	5,83	D	34,1	6.600	17	35	78	56	12	28
FHVI 741	10,24	7,88	C	51,1	6.400	16	34	78	56	12	28
FHVI 742	15,81	11,67	D	88,1	13.200	19	39	81	59	15	42
FHVI 743	20,48	15,36	C	102,2	12.600	18	38	81	59	15	42
FHVI 743	23,7	17,5	D	102,2	19.600	21	43	83	60	15	54
FHVI 743	30,02	22,16	D	153,2	19.200	20	42	83	60	15	54
FHVI 744	31,61	23,33	D	136,2	26.400	23	47	84	61	15	54