

Carrier 30 RH 100

Specifications

Merk	Carrier
Type	30 RH 100
Product type	Heat pump
Capaciteit kW	96,0
Capaciteit Tons	27,3
Koudemiddel	Freon
Koudemiddel Type	R407C
Pump	✓
Afmetingen	2080x2300x1380 mm (LxWxH)
Compressor(s) type & model	Performer: SZ120S4VC (x1), SZ161T4VC (x1) & SZ185W4PC (x1)
Display	Carrier Pro-Dialog Plus
Number of fans	2
Fan specifications	50 Hz - 700/350/550 RPM - 0,82/0,1/0,4 kW
Opmerkingen	Y.o.b. 2008
Stock	1




Description

Used Carrier 30 RH 100

Gebruikte Carrier 30 RH 100 warmtepomp op Freon R407C. Compleet met 1 Performer SZ120S4VC, 1 Performer SZ161T4VC en 1 Performer SZ185W4PC scrollcompressor, condensator met 2 ventilatoren - 50 Hz - 700/350/550 tpm - 0,82/0,1/0,4 kW, Alfa Laval AC-130-102DQ gesoldeerde warmtewisselaar, 2 Mecasem S.A. 30RH 501 022 E vloeistofvaten, Salmson SHC12-136/1.1 waterpomp met elektromotor, expansievat en een schakelkast met een Carrier Pro-Dialog Plus controller.



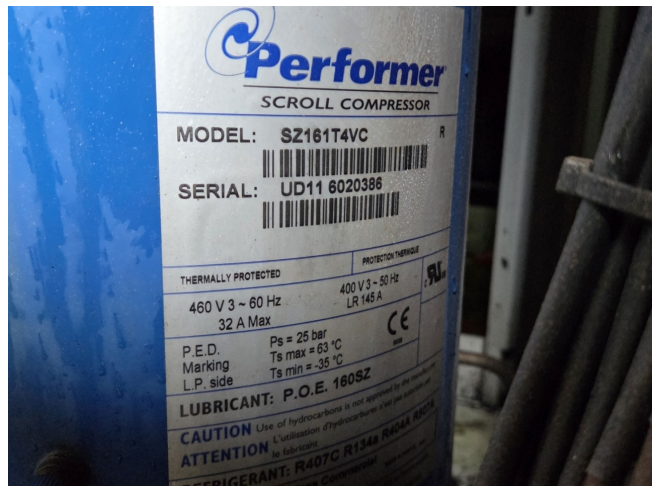





MECASEM S.A. Constructeur 67540 OSTWALD FRANCE

CE N° Organisme Notifié: 0035 N° de Série: 0701
 Notified Body: 0035 Serial Nr.: 0701
 Zuständige Prüfstelle: Seriennummer:

Type: 30RH 501 022 E Rev.5 Date d'épreuve: 2007
 Typ: Prüfdatum:

Fluide / Fluid	Pression de service Max/Min Bar / Working pressure Max/Min Bar / Betriebsdruck Max/Min Bar	Température de service Mini/Max °C / Working temperature Mini/Max °C / Betriebstemperatur Mini/Max °C	Volume (L) / Inhalt (L)	Pression d'essai / Test Pressure (Bar) / Prüfdruck (Bar)
R22 / R407C / HUILES	-1 / 32	-20 / +72 °C	11	46
R22 / R407C / HUILES	-1 / 32	-20 / +72 °C	0.85	46

CATEGORIE: II
 Poids : 20 kg
 Weight :
 Gewicht :



3-Induction Motor

WILHELM WILHELMSE, Narkischenstraße 101, D-42699 Dortmund, Germany

3612531 W071110-2-BST 1710.007
 Class F S1 IP55 12.0kg CC313B EN60034

50Hz 1.10kW SF=1.16 60Hz 1.29kW

ΔY 230/400V 4.41/2.55A Y 440-480V 2.52-2.50A
 Cosφ=0.77 2835min⁻¹ Cosφ=0.75 3465min⁻¹
 IE3 - 82.7% 82.7% 80.8% IE3 - 84.0% 83.9% 80.7%
 NEMA NOM. EFF. 84.0%

